



09/20/00

jc685 U.S. PTO  
09/20/00

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	197393US2S CONT
	First Inventor or Application Identifier	Hideo ANDO
	Title	RECORDING METHOD OF STREAM DATA AND DATA STRUCTURE THEREOF

<b>APPLICATION ELEMENTS</b> <small>See MPEP chapter 600 concerning utility patent application contents</small>	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification Total Pages <b>120</b></p> <p>3. <input checked="" type="checkbox"/> Formal Drawing(s) (35 U.S.C. 113) Total Sheets <b>18</b></p> <p>4. <input checked="" type="checkbox"/> Oath or Declaration Total Pages <b>2</b></p> <p>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</p> <p>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed)</p> <p>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).</p> <p>5. <input checked="" type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<b>ACCOMPANYING APPLICATION PARTS</b> <p>6. <input checked="" type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</p> <p>7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>8. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>9. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations (9)</p> <p>10. <input type="checkbox"/> Preliminary Amendment</p> <p>11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.</p> <p>13. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>14. <input checked="" type="checkbox"/> Other: Request for Priority Statement of Relevancy International Search Report</p>
<p>15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:</p> <p><input checked="" type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application no.: Int'l PCT Number: PCT/JP00/01653, Filed March 17, 2000</p> <p>Prior application information: Examiner: Group Art Unit:</p>	
<p>16. Amend the specification by inserting before the first line the sentence:</p> <p><input type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) application No. Filed on</p> <p><input type="checkbox"/> This application claims priority of provisional application Serial No. Filed</p>	
<b>17. CORRESPONDENCE ADDRESS</b>  <b>22850</b> (703) 413-3000 FACSIMILE: (703) 413-2220	

Name:	Gregory J. Maier	Registration No.:	25,599
Signature:		Date:	9-20-00
Name:	Surinder Sachar	Registration No.:	34,423

Docket No. 197393US2S CONT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR(S) Hideo ANDO ET AL

SERIAL NO: New Application

FILING DATE: Herewith

FOR: RECORDING METHOD OF STREAM DATA AND DATA STRUCTURE THEREOF

FEE TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	19 - 20 =	0	× \$18 =	\$0.00
INDEPENDENT CLAIMS	9 - 3 =	6	× \$78 =	\$468.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS (If applicable)			+ \$260 =	\$0.00
<input type="checkbox"/> LATE FILING OF DECLARATION			+ \$130 =	\$0.00
BASIC FEE				\$690.00
TOTAL OF ABOVE CALCULATIONS				\$1,158.00
<input type="checkbox"/> REDUCTION BY 50% FOR FILING BY SMALL ENTITY				\$0.00
<input type="checkbox"/> FILING IN NON-ENGLISH LANGUAGE			+ \$130 =	\$0.00
<input checked="" type="checkbox"/> RECORDATION OF ASSIGNMENT			+ \$40 =	\$40.00
TOTAL				\$1,198.00

Please charge Deposit Account No. 15-0030 in the amount of

A duplicate copy of this sheet is enclosed.

A check in the amount of **\$1,198.00** to cover the filing fee is enclosed.

The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.

Date: 9-30-00

Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 11/98)

Gregory J. Maier  
Registration No. 25,599

Surinder Sachar  
Registration No. 34,423



22850

TITLE OF THE INVENTION

RECORDING METHOD OF STREAM DATA AND DATA STRUCTURE  
THEREOF

CROSS REFERENCE TO RELATED APPLICATIONS

5           This is a continuation of Application  
No. PCT/JP00/01653, filed March 17, 2000.

          This application is based upon and claims the  
benefit of priority from the prior Japanese Patent  
Application No. 11-072077, filed March 17, 1999, the  
10       entire contents of which are incorporated herein by  
reference.

BACKGROUND OF THE INVENTION

          The present invention relates to a method of  
recording video data sent in digital broadcast or the  
15       like or stream data sent with a packet structure, a  
data structure of stream data suitable for this  
recording method, and information medium on which  
information is recorded using this data structure.

          In recent years, TV broadcast has come into the  
20       era of digital broadcast. Accordingly, an apparatus  
for saving digital data of digital TV broadcast as they  
are irrespective of their contents, i.e., a so-called  
streamer, has been demanded.

          The current digital TV broadcast uses an MPEG  
25       transport stream. In the future, an MPEG transport  
stream will be used as a standard one in the field of  
digital broadcast using moving picture.

In such digital broadcast, the contents (mainly, video information) to be broadcasted are time-divided into groups of data each having a predetermined size (e.g., 188 bytes) called transport packets, and  
5 broadcast data is sent in units of transport packets.

As a streamer for recording digital broadcast data, a home digital VCR such as D-VHS (digital VHS) or the like is currently commercially available. A streamer using D-VHS directly records a broadcasted bitstream on  
10 a tape. For this reason, a plurality of programs are multiplexed and recorded on a video tape.

Upon playback, all data are output from the VCR to a set-top box (digital TV reception apparatus; to be abbreviated as an STB hereinafter) when they are played  
15 back either from the beginning or the middle of the tape. In this STB, a desired program is selected from the output data by user operation or the like. The selected program information is transferred from the STB to a digital TV receiver, and is played back  
20 (playback of video plus audio and the like).

Since this D-VHS streamer uses a tape as a recording medium, it cannot attain quick random access, and it is difficult to quickly jump to a desired position of a required program so as to play it back.

25 As a promising candidate that can combat such shortcoming (difficulty of random access) of the tape, a streamer that uses a large-size disc medium such as a

DVD-RAM or the like has been proposed. In this case, management data must be inevitably recorded together with broadcast data in consideration of random access, special playback, and the like.

5           When a DVD-RAM disc is used as an information storage medium, data are recorded in units of 2,048-byte sectors. On the other hand, digital TV broadcast adopts an MPEG transport stream, and stream data each of which stores video information are sent in  
10 units of 188-byte transport packets as minimum units of the transport stream. The size of this transport packet differs depending on digital TV broadcast stations and, for example, a given digital TV broadcast station sends data in units of 130 bytes. When such  
15 received transport packets are recorded in units of sectors on an information storage medium such as a DVD-RAM disc or the like as they are, the following problems are posed. That is:

20           1. Since 2,048 bytes as the sector size are not an integer multiple of the transport packet size (e.g., 188 bytes), a recording method of transport packets in a sector poses a problem.

25           More specifically, when transport packets are allocated in a given sector in turn from the first one, and the remaining area formed in this sector is handled as a padding area, a large number of wasteful padding areas are generated in units of sectors. For this

reason, the stream data size that can be recorded on the information storage medium decreases by the padding areas in units of sectors. As a result, the practical recording capacity of the information storage medium decreases.

2. Stream data that have been video-compressed according to the MPEG format must be decoded by a decoder after they are played back from the information storage medium. In this case, the time interval between neighboring transport packets to be transferred to the decoder must hold that immediately after they were received from a digital TV broadcast station. For this reason, time interval information of each transport packet upon being transferred to the decoder is required.

3. Since transport packets recorded on the information storage medium have no identification information for identifying individual transport packets, there is no means for designating a specific transport packet upon search or edit.

4. When a DVD-RAM disc is used as an information storage medium, since data are recorded in units of 2,048-byte sectors, it is difficult to implement a partial erase process in units of transport packets.

5. Since stream data sent in digital TV broadcast have been video-compressed in accordance with the MPEG format, decoding must be started from an I-picture

position. Therefore, a partial erase process at a specific video position must be done to have an I-picture start position at the head position of the data as a boundary position in practice. However, in  
5 information obtained by merely recording transport packets in turn in sectors, it is difficult to implement a partial erase process using the I-picture start position as the boundary position.

It is an object of the present invention to  
10 provide a recording method that can efficiently record stream data.

It is another object of the present invention to provide a data structure that can efficiently manage stream data.

15 BRIEF SUMMARY OF THE INVENTION

In order to achieve the above object, a recording method according to the present invention uses an information medium (201) which has a data area (STREAM.VRO/SR\_TRANS.SRO) for recording stream data  
20 (SOB) using stream PES packets each of which includes an application packet area that includes one or more application packets with time stamps (ATS), and a management area (STREAM.IFO/SR\_MANGR.IFO) for recording management information (STRI) that pertains to the  
25 stream data (SOB).

The stream data (SOB) are distributed and recorded in the application packet areas of a plurality of

stream PES packets (cf. ST10 in FIG. 12). When the start portion of the application packet area included in the first stream PES packet in the stream data (SOB) does not match the first byte of a time stamp (ATS) appended to the first application packet in the application packet area, information recording is done so that they match (cf. ST16 in FIG. 12).

In another recording method according to the present invention, the stream data (SOB) are distributed and recorded in the application packet areas of a plurality of stream PES packets (cf. ST10 in FIG. 12). When a blank portion is formed at the end of the application packet area, a stuffing area (cf. stuffing area in FIG. 5 (h) or padding area 37 in FIG. 19 (j)) formed of a predetermined number of bytes (without any time stamp) is provided or assured in the blank portion (cf. some of processes in ST22 of FIG. 12).

In still another recording method according to the present invention, as a result of distributing and recording the stream data (SOB) in the application packet areas of a plurality of stream packs (cf. ST10 in FIG. 12), when a blank portion for one stream pack or more (cf. area of sector No. n in FIG. 6 (e)) is formed between the end of the last stream pack that actually contains stream data, and the end of an area that records the stream data, stuffing packets (FIG. 6



(i) and (j)) that fill the blank portion are recorded (cf. ST20 in FIG. 12).

5 In still another recording method according to the present invention, the stream data (SOB) is formed by a plurality of data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$  in FIG. 8 (a)), and each data unit is formed by one or more data packets (TP/AP in FIG. 8 (b)) each of which records predetermined time stamp (TMS) information.

10 At least a time difference value (rounded value in FIG. 8 (c) and (d)) corresponding to the difference between the first time stamp (TMS 1a) recorded in the first data unit (SOBU# $\alpha$ ) and the second time stamp (TMS 33a) recorded in the second data unit (SOBU# $\beta$ ) of a plurality of the data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$ ) is  
15 recorded in the management area (STREAM.IFO/SR\_MANGR.IFO) (cf. some of processes in ST24 in FIG. 12).

20 In still another recording method according to the present invention, one or more pieces of cell information (cf. FIG. 18) are recorded in the stream data (SOB), and information (PGCI in FIG. 3 (f) or FIG. 13) of a program chain (PGC) that describes a set of one or more cells is recorded in the management area (STREAM.IFO/SR\_MANGR.IFO).

25 Information (SC\_EPI) of an entry point (EP), which can be used as a marker of a skip position upon partially skipping recorded contents of the stream data

(SOB) in playback, is recorded in the management information (STRI) (cf. some of processes in ST24 in FIG. 12).

5 In order to achieve the other object, a data structure according to the present invention has a data area (STREAM.VRO/SR\_TRANS.SRO) for recording stream data (SOB or SOBU) using predetermined data recording units (transport packets or application packets), and a management area (STREAM.IFO/SR\_MANGR.IFO) for recording  
10 management information (STRI) that pertains to the stream data.

A plurality of stream packs each of which contains one or more data recording units (application packets) with time stamps (ATS) are used, and the stream data  
15 are distributed to a plurality of the stream packs. Each stream pack contains a pack header and a stream PES packet.

The start portion of an application packet area included in the first stream PES packet in the stream  
20 data (SOB) matches the start byte of the time stamp (ATS) appended to the first data recording unit (application packet) in the application packet area.

Note that the stream PES packet may include a stuffing byte of a variable length including zero byte  
25 length, and an application packet area including one or more data recording units (application packets) with time stamps (ATS).

In another data structure according to the present invention, when a blank portion is formed at the end of the application packet area, a stuffing area (stuffing area in FIG. 5 (h) or padding area 37 in FIG. 19 (j))  
5 formed of (or consisting of) a predetermined number of bytes (without any time stamp) is provided or assured in the blank portion.

In still another data structure according to the present invention, when a blank for one stream pack or  
10 more is formed between the end of the last stream pack that actually contains stream data (SOB), and the end of an area that records the stream data (SOB), stuffing packets that fill the blank portion are recorded as padding data.

In still another data structure according to the present invention, the stream data (SOB) includes a plurality of data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$  in FIG. 8 (a)), and each of the data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$ ) includes one or more data packets (TP/AP in FIG. 8 (b))  
15 each of which records time stamp (TMS) information.

A time difference value (rounded value in FIG. 8 (c) and (d)) corresponding to the difference between the first time stamp (TMS 1a) recorded in the first data unit (SOBU# $\alpha$ ) and the second time stamp (TMS 33a)  
20 recorded in the second data unit (SOBU# $\lambda$ ) of a plurality of the data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$ ) is recorded in the management area

(STREAM.IFO/SR\_MANGR.IFO).

In still another data structure according to the present invention, one or more pieces of cell information (cf. FIG. 18) are recorded in the stream data (SOB), and information (PGCI in FIG. 3 (f) or FIG. 13) of a program chain (PGC) that describes a set of one or more cells is recorded in the management area (STREAM.IFO/SR\_MANGR.IFO).

The management information (STRI) stores information (SC\_EPI) of an entry point (EP) which can be used as a marker of a skip position upon partially skipping recorded contents of the stream data (SOB) in playback.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the

principles of the invention.

FIG. 1 is a view for explaining the data structure of stream data according to an embodiment of the present invention;

5           FIG. 2 is a view for explaining the directory structure of data files according to an embodiment of the present invention;

10           FIG. 3 is a view for explaining the recorded data structure (especially, the structure of management information) on an information medium (recordable/reproducible DVD disc) according to an embodiment of the present invention;

15           FIG. 4 is a view for explaining the relationship among stream objects (SOB), cells, program chains (PGC), and the like in the present invention;

            FIG. 5 is a view for explaining the relationship among the video data transfer formats in digital broadcast, IEEE1394, and a streamer;

20           FIG. 6 is a view for explaining the sector structure that stores data of a stream object;

            FIG. 7 is a view for explaining the relationship between the video information compression method in MPEG and transport packets;

25           FIG. 8 is a view for explaining the method of setting time map information shown in FIG. 1, etc.;

            FIG. 9 is a view for explaining changes in stream object information and original cell information before

and after the recorded stream object is partially  
erased;

FIG. 10 is a view for explaining the data  
structure of a stream pack shown in FIG. 5, etc.;

5        FIG. 11 is a block diagram for explaining the  
arrangement of a stream data recording/playback system  
(optical disc device/streamer, STB unit) according to  
an embodiment of the present invention;

10       FIG. 12 is a flow chart for explaining the  
processes of alignment between an application packet  
and stream object and a padding process at the end of a  
stream object when information recording of a bitstream  
is done by the system shown in FIG. 11;

15       FIG. 13 is a view for explaining the internal data  
structure of management information (STREAM.INFO in  
FIG. 2 or 3) of the streamer;

FIG. 14 is a view for explaining the internal data  
structure of PGC information (ORG\_PGCI/UD\_PGCI in  
FIG. 3 or PGCI#i in FIG. 13);

20       FIG. 15 is a view for explaining the internal data  
structure of a stream file information table (SFIT);

FIG. 16 is a view exemplifying the correspondence  
between an access unit start map (AUSM) and stream  
object unit (SOBU);

25       FIG. 17 is a view exemplifying the correspondence  
between an access unit start map (AUSM) and access unit  
end map (AUEM), and stream object unit (SOBU);

FIG. 18 is a view for explaining the relationship between cells designated by an original or user-defined PGC and SOBUs corresponding to these cells via time map information; and

5           FIG. 19 is a view for explaining the data structure of stream data according to another embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

10           A recording method of stream data, its data structure, and so on, according to an embodiment of the present invention will be described hereinafter with reference to the accompanying drawings.

15           FIG. 1 is a view for explaining the data structure of stream data according to an embodiment of the present invention.

Stream data are recorded on an information storage medium to be combined as a stream object in correspondence with the contents of video information or single video recording contents in stream data.

20           FIG. 1 (h) exemplifies a stream object recorded on an information medium such as a DVD-RAM disc or the like. FIG. 1 (h) shows the last part of stream object #A 298 and stream object #B 299 recorded after that stream object.

25           When such stream data are recorded on the DVD-RAM disc or the like, the data are recorded using 2,048-byte sectors as minimum units, as shown in FIG. 1

(d). Each sector is divided into recording areas of pack headers (or packet headers) 11 to 15 and data areas for recording stream data, as shown in FIG. 1 (c) and (e).

5           Each data area is packed in turn with time stamps and transport packets, as shown in FIG. 1 (f) and (g). Such packing can be done as follows. That is:

10           1. Time stamps and transport packets are sequentially recorded together at a location other than pack headers 11 to 15 in a sector, and when the division (or cutting portion) of a time stamp or that of stream data recorded in units of transport packets is different from a sector boundary position, either the time stamp or transport packet is allocated and  
15           recorded to a position being across to the neighboring (or adjacent) sector.

          More specifically, when time stamps and transport packets are packed in turn in data area No. 1 in FIG. 1 (g), a portion of transport packet 1k cannot be stored  
20           in and overflows from data area No. 1. The portion of this transport packet 1k, which overflows from data area No. 1 is successively recorded at the head position of data area No. 2 in the next sector No. 2.

25           2. A group of single video recording contents done by the user or the like or a group of identical contents such as a single program or the like is defined as a stream object. When the last transport



packet position of the stream object recorded on the information storage medium is different from a sector boundary position, an area after that last transport packet position is set as a padding area as long as the corresponding sector has a remaining area.

More specifically, in the example shown in FIG. 1 (k), video recording comes to an end at transport packet 321a, which is a practical last position of stream object #B 299. In this case, when this transport packet 321a is allocated in the middle of data area No. 321 in FIG. 1 (j), the remaining area after packet 321a is set as padding area 21.

Using such data structure, a packet having a size larger than the sector size can be efficiently recorded.

FIG. 1 also shows the data structure that pertains to time map information. The contents of data in time map information 252 will be described below using FIG. 1.

As exemplified in FIG. 1 (h) and (i), stream object (SOB) #B·299 consists of a plurality of stream blocks (SOBUs) #α to #γ.

In the example shown in FIG. 1 (h) and (i), the data size of each of stream blocks (SOBUs) #α to #γ that form SOB#B·299 is equal to two ECC blocks, i.e., a size for 32 sectors. That is, each of first stream block sizes 261 to 264 (FIG. 1 (l)) in time map information (FIG. 1 (m)) is equal to 32 sectors (64 k bytes).

First stream block (SOBU) # $\alpha$  (FIG. 1 (i)) in  
SOB#B-299 (FIG. 1 (h)) has sector No. 1 (FIG. 1 (d)) at  
its head position, and time stamp 1a (FIG. 1 (g) and  
(k)) is recorded at the head position of data area  
5 No. 1 (FIG. 1 (e), (f), and (j)) included in sector  
No. 1.

Succeeding stream block (SOBU) # $\beta$  (FIG. 1 (i)) of  
SOB#B-299 (FIG. 1 (h)) has data area No. 33 (FIG. 1 (j)),  
which records transport packet 33a (FIG. 1 (k)) with  
10 time stamp 33a.

As shown in FIG. 1 (k), the time stamp value [0]  
of the first stream data (transport packet 1a) of  
stream block (SOBU) # $\alpha$  is time stamp 1a, and the time  
stamp value [28] of stream data (transport packet 33a)  
15 in the next stream block (SOBU) # $\beta$  is time stamp 33a.

The value [30] of first stream block time  
difference 266 in FIG. 1 (l) is given by rounding the  
difference value ([28] - [0]) between time stamps 33a  
and 1a to retain a predetermined effective number of  
20 digits (in this case, one effective digit) (by  
increasing the last retained digit by 1) ([28] - [0]  $\approx$   
[30]).

Note that time map information 252 in FIG. 1 (m)  
may be handled as the one including access data unit  
25 AUD in stream object information SOBI which will be  
described later with reference to FIG. 15. With  
information (access unit start map AUSM and the like)

included in this AUD, an SOBU that includes information to be accessed (required I-picture information or the like) can be specified.

In the format shown in FIG. 1, the sector number of the first sector of stream object #B 299 is set at 1, and the sector number is incremented in turn. The sector number matches the data area number, and the time stamp number and transport packet number are set in correspondence with these numbers. That is, the first pair of time stamp and transport packet allocated in a data area in the 33rd sector are set to have the number "33a", and the numbers of the subsequent pairs in that data area are set to be "33b", "33c",.... Note that the number of the time stamp or transport packet such as transport packet 32j or 320k which overflows from the immediately preceding data area and is recorded to a position in the next data area is indicated in correspondence with the immediately preceding data area number. Also, the contents of brackets [] in FIG. 1 (k) exemplify the actual values of time stamps.

As shown in FIG. 1 (a) to (c), as intra-sector common information 41 in information in pack headers (or packet headers) 11 to 15, pack header size 51, time stamp size 52, and transport packet size 53 are described.

Taking sector No. 1 in FIG. 1 (d) as an example,

first time stamp value 54 in a sector in search  
information 42 in FIG. 1 (b) means the value of time  
stamp 1a [= 0] in FIG. 1 (k). On the other hand, last  
time stamp value 55 in a sector in search information  
5 42 means the value of time stamp 1k (not shown).

Many dictionaries contain footnotes or the first  
and last words of individual pages at the header  
positions in these pages so as to facilitate a search.  
Likewise, the two pieces of information (first and last  
10 time stamp values 54 and 55 shown in FIG. 1 (a))  
facilitate a search of stream data.

Since a single time stamp or transport packet can  
be allocated across neighboring sectors, when an  
independent access is made in units of sectors, the  
15 first time stamp position information is required.  
First access point 56 shown in FIG. 1 (a) means the  
number of bits counted from a position immediately  
after the packet header to the first time stamp  
position. However, this embodiment is not limited to  
20 such specific information. For example, the number of  
bits to the first transport packet head position may be  
provided as information (equivalent to first access  
point 56).

In this embodiment, since a value larger than the  
25 data area size can be designated as the value of first  
access point 56, the time stamp head position of a  
packet having a size larger than the sector size can be

designated.

For example, a case will be examined below wherein in the data structure shown in FIG. 1 (d) to (g), a single packet is recorded across sectors No. 1 and No. 2, a time stamp for that packet is recorded at the first position in a data area of sector No. 1, and a time stamp for the next packet is allocated at the T-th bit position in a data area in sector No. 2.

In this case, the value of first access point 56 of sector No. 1 is "the data area size of sector No. 1 + T", and the value of the first access point of sector No. 2 is "T".

Since a value larger than the data area size of sector No. 1 is set as the value of first access point 56 of sector No. 1, it indicates that the position of a time stamp corresponding to a packet that follows the packet recorded in sector No. 1 is present in the next sector or subsequent sector.

When partial erase (see FIG. 9) is done in units of sectors, last position information 57 (FIG. 1 (a)) of a substantially effective pair of time stamp and transport packet which do not run to a position in the next sector is required.

In this embodiment, the number of pairs of time stamps and transport packets which are recorded in a complete form (do not run to other sectors) is described. However, this embodiment is not limited to

such specific information, and information of, e.g.,  
the last position address may be recorded (as last  
position information 57).

As shown in FIG. 1 (a) and (b), bitmap information  
5 43 that pertains to each transport packet includes I-  
picture position flag 58, picture head position flag 59,  
and cipher information 60. I-picture position flag 58  
and picture head position flag 59 in FIG. 1 (a) can be  
generated using information of random access indicator  
10 303 and payload unit start indicator 301 which will be  
described later with reference to FIG. 5. Cipher  
information 60 records information used in copy  
protection as needed.

Based on intra-sector common information 41 and  
15 search information 42 in FIG. 1 (b), the number of  
transport packets in a sector of interest can be  
detected. One bit is assigned to each of these  
transport packets in the layout order, and a flag "1"  
can be set for a transport packet that clears the above  
20 condition. Bitmap information 43 which pertains to  
individual transport packets set with these flags is  
recorded in a pack header, as shown in FIG. 1 (b)  
and (c).

In digital broadcast, video information compressed  
25 according to the MPEG2 format is transferred. Digital  
broadcast adopts a multi-program compatible  
multiplexing/demultiplexing scheme called a transport

stream, as shown in FIG. 5 (c), and one transport packet b 322 often has a size of 188 bytes (or 183 bytes).

As described above, one sector size is 2,048 bytes, and each data area can record approximately 10 transport packets for digital broadcast even after various header sizes are subtracted. By contrast, in a digital communication network such as ISDN or the like, a long packet having a packet size as large as 4,096 bytes is often transferred.

Using the data structure in FIG. 1, one packet can be recorded across a plurality of data areas, so that a packet with a large packet size such as a long packet can be recorded. All packets, i.e., transport packets for digital broadcast, a long packet for digital communications, and the like can be recorded in a stream block (SOBU in FIG. 1 (i)) without any fractions independently of their packet sizes.

FIG. 2 is a view for explaining the directory structure of data files according to an embodiment of the present invention. The contents (file structure) of information recorded on the information storage medium according to an embodiment of the present invention will be explained below.

Each information recorded on an information storage medium such as a DVD-RAM disc or the like has a hierarchical file structure. Video information and

stream data information to be explained in this embodiment are stored in subdirectory 101 named DVD\_RTR directory (or DVD\_RTAV) 102.

5 DVD\_RTR (DVD\_RTAV) directory 102 stores data file 103 having the following contents. More specifically, as a group of management information (navigation data), RTR.IFO (VR\_MANGR.IFO) 104, STREAM.IFO (SR\_MANGR.IFO/SR\_MANGR.BUP) 105, and SR\_PRIVT.DAT/SR\_PRIVT.BUP 105a are stored.

10 As a data main body (contents information), STREAM.VRO (SR\_TRANS.SRO) 106, RTR\_MOV.VRO (VR\_MOVIE.VRO) 107, RTR\_STO.VRO (or VR\_STILL.VRO) 108, and RTR\_STA.VRO (or VR\_AUDIO.VRO) 109 are stored.

15 Root directory 100 as an upper layer of subdirectory 101 including data file 103 can be provided with subdirectory 110 for storing other kinds of information. This subdirectory includes, as its contents, video title set VIDEO\_TS 111 that stores video programs, audio title set AUDIO\_TS 112 that 20 stores audio programs, subdirectory 113 for saving computer data and the like.

Data which is transmitted on a wired or wireless data communication path in the form of a packet structure and is recorded on an information storage 25 medium while holding the packet structure is called "stream data".

The stream data themselves are recorded together



with file name STREAM.VRO (or SR\_TRANS.SRO) 106. A file that records management information of the stream data is STREAM.IFO (or SR\_MANGR.IFO and its backup file SR\_MANGR.BUP) 105.

5           A file that records analog video information which is used in a VCR (VTR) or conventional TV and is digitally compressed based on MPEG2 is RTR\_MOV.VRO (or VR\_MOVIE.VRO) 107, a file that collects still picture information including postrecorded audio, background  
10           audio, or the like is RTR\_STO.VRO (or VR\_STILL.VRO) 108, and its postrecorded audio information file is RTR\_STA.VRO (or VR\_AUDIO.VRO) 109.

FIG. 3 is a view for explaining the recorded data structure (especially, the structure of management  
15           information) on an information medium (recordable/reproducible DVD disc) according to an embodiment of the present invention.

In an area sandwiched between the ends of inner circumferential direction 202 and outer circumferential  
20           direction 203 of information storage medium 201 shown in FIG. 3 (a), lead-in area 204, volume & file structure information 206 that records file system information, data area 207, and lead-out area 205 are present, as shown in FIG. 3 (b). Lead-in area 204 is  
25           made up of an emboss zone and rewritable data zone, and lead-out area 205 is made up of a rewritable data zone. Data area 207 is also made up of a rewritable data zone.

Data area 207 can record computer data and audio & video data together, as shown in FIG. 3 (c). In this example, audio & video data area 210 is sandwiched between computer data areas 208 and 209.

5           Audio & video data area 210 can record real-time video recording area 221 and stream recording area 222 together, as shown in FIG. 3 (d). (Either of real-time video recording area 221 or stream recording area 222 can be used.)

10           As shown in FIG. 3 (e), real-time video recording area 221 records RTR navigation data RTR.IFO (VR\_MANGR.IFO) 104, movie real-time video object RTR\_MOV.VRO (VR\_MOVIE.VRO) 107, still picture real-time video object RTR\_STO.VRO (VR\_STILL.VRO) 108, and audio  
15           object RTR\_STA.VRO (VR\_AUDIO.VRO) 109 such as postrecorded audio or the like, which are shown in FIG. 2.

          Also, as shown in FIG. 3 (e), stream recording area 222 records streamer navigation data STREAM.IFO  
20           (SR\_MANGR.IFO/SR\_MANGR.BUP) 105 and transport bitstream data STREAM.VRO (SR\_TRANS.SRO) 106, which are shown in FIG. 2.

          Note that stream recording area 222 can also record navigation data SR\_PRIVT.DAT/SR\_PRIVT.BUP 105a  
25           unique to an application shown in FIG. 2, although not shown in FIG. 3 (d) and (e).

          This SR\_PRIVT.DAT 105a is navigation data unique

to an individual application connected (supplied) to the streamer, and need not be recognized by the streamer.

5       STREAM.IFO (or SR\_MANGR.IFO) 105 as management information that pertains to stream data has a data structure shown in FIG. 3 (f) to (i).

10       More specifically, as shown in FIG. 3 (f), STREAM.IFO (or SR\_MANGR.IFO) 105 is comprised of video manager (VMGI or STR\_VMGI) 231, stream file information table (SFIT) 232, original PGC information (ORG\_PGCI) 233, user-defined PGC information table (UD\_PGCIT) 234, text data manager (TXTDT\_MG) 235, and manufacturer information table (MNFIT) or application private data manager (APDT\_MG) 236 that manages navigation data  
15       SR\_PRIVT.DAT 105a unique to an application.

20       Stream file information table (SFIT) 232 shown in FIG. 3 (f) can contain stream file information table information (SFITI) 241, one or more pieces of stream object information (SOBI) #A·242, #B·243,..., original PGC information general information 271, and one or more pieces of original cell information #1·272, #2·273,..., as shown in FIG. 3 (g).

25       Each stream object information (e.g., SOBI#B·243) shown in FIG. 3 (g) can contain stream object general information (SOBI\_GI) 251, time map information 252, etc., as shown in FIG. 3 (h).

Each original cell information (e.g., #1·272;

corresponding to SCI shown in FIG. 14 to be described later) shown in FIG. 3 (g) can contain cell type 281 (corresponding to C\_TY shown in FIG. 14 to be described later), cell ID 282, corresponding cell start time (corresponding to SC\_S\_APAT shown in FIG. 9 (k) and (l) and FIG. 14 to be described later) 283, corresponding cell end time (corresponding to SC\_E\_APAT shown in FIG. 9 (k) and (l) and FIG. 14 to be described later) 284, entry point information (SC\_EPI) 285, as shown in FIG. 3 (h).

Entry point information (SC\_EPI) 285 can be used as a tool for partially skipping recorded contents. This entry point information (SC\_EPI) 285 includes two types (types A and B) depending on the presence/absence of primary text information (PRM\_TXTI), as shown in FIG. 14.

Note that an entry point indicates an entry position into a program in case of an original PGC or an entry position into a portion of a program in case of a user-defined PGC. Such entry points are recorded as a part of cell information (SCI). These entry points can be used to skip a portion of recorded contents upon playing back the recorded contents.

All entry points can be specified by application packet arrival times (APAT). This application packet arrival time of the entry point is indicated by EP\_APAT in FIG. 14.

Time map information 252 in FIG. 3 (h), which is contained in SOBI#A in FIG. 3 (g) can include stream block number 260, first stream block size 261, second stream block size 262,..., and first stream block time difference 266, second stream block time difference 267,..., as shown in FIG. 3 (i).

An example of stream block time difference 266 that forms time map information 252 is shown in FIG. 1 (1). The contents of each stream block time difference that forms time map information 252 will be explained later with reference to FIG. 8.

FIG. 4 is a view for explaining the relationship among stream objects (SOB), cells, program chains (PGC), etc., in an embodiment of the present invention. The relationship between SOB and PGC in the present invention will be explained below using an example shown in FIG. 4.

Stream data recorded in stream data (STREAM.VRO or SR\_TRANS.SRO) 106 form stream blocks as sets of one or more ECC blocks, and recording, a partial erase process, and the like are done in units of stream blocks. The stream data form groups called stream objects in units of contents of information to be recorded (e.g., in units of programs in digital broadcast).

Management information (original PGC information 233, user-defined PGC information table 234, or the like) for each stream object (SOB#A, SOB#B) recorded in

STREAM.VRO (SR\_TRANS.SRO) 106 is recorded in navigation data STREAM.IFO (SR\_MANGR.IFO) 105 (see lowermost portion in FIG. 4 and FIG. 3 (e) and (f)).

Two pieces of management information (STREAM.IFO 105) for stream objects #A-298 and #B-299 in FIG. 4 are recorded as two pieces of stream object information (SOBI) #A-242 and #B-243 in stream file information table (SFIT) 232, as shown in FIG. 3 (f) and (g).

Each of stream object information (SOBI) #A-242 and #B-243 contains time map information 252 that mainly describes the data size, time information, and the like in units of stream blocks.

Upon playing back stream data, information (corresponding to PGCI#i in FIG. 14 to be described later) of a program chain (PGC) made up of one or more successive cells is used. Stream data can be played back in accordance with the order in which the cells that form this PGC are set.

There are two types of PGCs, i.e., original PGC 290 (ORG\_PGCI-233 in FIG. 3 (f)) which can continuously play back all stream data recorded in STREAM.VRO (SR\_TRANS.SRO) 106, and user-defined PGCs #a-293 and #b-296 (corresponding to the contents of UD\_PGCI-234 in FIG. 3 (f)) that can set arbitrary locations and order of user choice.

Original cells #1-291 and #2-292 that form original PGC 290 basically have one-to-one correspondence with

stream objects #A·298 and #B·299.

By contrast, user-defined cells #11·294, #12·295,  
and #31·297 that form the user-defined PGC can set  
arbitrary locations within the range of one stream  
5 object #A·298 or #B·299.

A cell range can be designated by designating its  
start and end times. More specifically, in the example  
shown in FIG. 1 (k), the values of first time stamp 1a  
and last time stamp 321a in corresponding stream object  
10 #B·299 are used as the values of corresponding cell  
start and end times 283 and 284 (FIG. 3 (h)) in  
original cell #2·292 before execution of partial erase  
or edit (immediately after recording of stream data).

By contrast, the time range in user-defined cell  
15 #11·294 in FIG. 4 can designate arbitrary times, and the  
values of time stamps corresponding to designated  
transport packets can be set as the values of  
corresponding cell start and end times.

As a method of accessing stream data in the stream  
20 object, playback of which is to begin, this embodiment  
can use two methods:

(1) a method of accessing data using the total  
recorded data size from the recording start position of  
each stream object; and

25 (2) a method of accessing data taking the decode  
timing of a decoder into consideration in  
correspondence with video compression by MPEG.

As can be seen from FIG. 1 (g), all transport packets are additionally recorded with time stamp information, and each transport packet can be accessed using this time stamp information.

5           When a DVD-RAM disc is used as an information storage medium, ECC blocks are formed every 16 sectors. In an embodiment of the present invention, stream data are grouped in units of integer multiples (e.g., twice) of ECC blocks, and an elapsed time table is provided to  
10 each group, thus allowing the method (1) of "accessing data using the total recorded data size". The method (2) of "accessing data taking the decode timing of the decoder into consideration" will be explained in detail later in the description of FIG. 11.

15           In an embodiment of the present invention, time map information 252 is recorded as elapsed time tables in units of groups. This time map information is recorded in a portion of stream object information #A.242; #B.243) corresponding to each stream object, as  
20 shown in FIG. 3 (g) and (h).

          In an embodiment of the present invention, each group (sectors grouped in units of two ECC blocks) is called a stream block (or a data unit called an SOBU) (see upper portion in FIG. 4 or FIG. 1 (i)).

25           A time stamp is often not allocated at the start position of a sector which is allocated at the head position of each stream block (SOBU). In such case, it



is difficult to define elapsed times in units of stream blocks (SOBUs).

Following measures can be taken against such situation.

5           A) A time stamp value allocated at a specific position of each stream block is used as a time unique to that stream block.

10           More specifically, the value of a time stamp which is allocated first in each stream block (and its recording did not start from the previous sector) is used as the start time of each stream block.

          B) The differential time between unique times (each start times) in units of stream blocks is defined as an elapsed time of each stream block.

15           C) The elapsed time (differential time) information is recorded in time map information 252.

20           Using the differential time (elapsed time), the data size can be reduced. However, an embodiment of the present invention is not limited to such specific information, and each stream block unique time may be recorded in time map information 252.

          D) The rounded value of the elapsed time (differential time) information is recorded in time map information 252.

25           By rounding the computation result of the elapsed time (differential time) information (by counting fractions as one or rounding off), the rounded value is

recorded in time map information 252, thus reducing the data size.

5 E) The stream block boundary position set upon initial recording remains unchanged even in stream data after partial erase.

10 Note that the sector size of each stream block can be variously set. As a preferred embodiment, a stream object unit (SOBU) made up of two ECC blocks (32 sectors) and having a constant size (64 k bytes) can be used as a stream block like stream block #μ in FIG. 4.

When the stream block is fixed to be an SOBU having a constant size (e.g., 2 ECC blocks = 32 sectors = 64 k bytes), the following merits are obtained.

15 (01) Even when stream data is erased or rewritten in units of SOBUs, an ECC block of that SOBU does not influence ECC blocks of SOBUs other than the SOBU to be erased or rewritten. For this reason, ECC deinterleave/interleave upon erase or rewrite (for SOBUs other than the SOBU to be erased or rewritten)  
20 need not be done; and

25 (02) An access position to recorded information in an arbitrary SOBU can be specified by the number of sectors (or a parameter corresponding to the number of sectors; e.g., information of stream packs or application packets therein). For example, when the middle position of given SOBU#k is to be accessed, the 16th sector position (or application packet position

corresponding to the 16th sector position) from the boundary between SOBU#k-1 and SOBU#k can be designated.

FIG. 5 is a view for explaining the correspondence among the digital broadcast contents, the video data transfer format in IEEE1394, and stream packs in the streamer.

In digital broadcast, video information compressed according to MPEG2 is transferred in transport packets. Digital broadcast adopts a multi-program compatible multiplexing/demultiplexing scheme called a transport stream, as shown in FIG. 5 (c), and one transport packet b 322 often has a size of 188 bytes (or 183 bytes).

Each transport packet is made up of transport packet header 311, and payload 312 that records a data main body of recording information, as shown in FIG. 5 (b).

Transport packet header 311 is comprised of payload unit start indicator 301, packet ID (PID) 302, random access indicator 303, program clock reference 304, playback time stamp (PTS) 305, and the like, as shown in FIG. 5 (a).

The MPEG-compressed video information contains I-, B-, and P-picture information. In the first transport packet that records I-picture information, random access indicator 303 in FIG. 5 (a) is set with flag = "1". On the other hand, in the first transport packets

of B-picture information and P-picture information,  
payload unit start indicator 301 in FIG. 5 (a) is set  
with flag = "1".

Using information of these random access indicator  
5 303 and payload unit start indicator 301, information  
of an I-picture mapping table and information of a B/P-  
picture start position mapping table are generated.

For example, a bit at the corresponding position  
in the B/P-picture start position mapping table is set  
10 at "1" for a transport packet having payload unit start  
indicator 301 shown in FIG. 5 (a) set with flag = "1".

In digital broadcast, video information and audio  
information are transferred in different transport  
packets. The video information and audio information  
15 are distinguished by packet ID (PID) 302 in FIG. 5 (a).  
Using information of this PID 302, a video packet  
mapping table and an audio packet mapping table can be  
generated.

As shown in FIG. 5 (c), a plurality of programs  
20 (programs 1 to 3 in this example) are time-divisionally  
transferred while being packetized in a single  
transponder. For example, information of transport  
packet header 311 and that of payload (recording  
information) 312 in FIG. 5 (b) are transferred by  
25 transport packets b 522 and e 525 of program 2 shown in  
FIG. 5 (c).

In IEEE1394, as shown in FIG. 5 (e) and (f), each

of IEEE isochronous headers 343 and 344 includes isochronous packet header 351 and common isochronous packet header 352. In this common isochronous packet header 352, a format-dependent reserve area is set.

5           In an embodiment of the present invention, as shown in FIG. 5 (g), the format-dependent reserve area in common isochronous packet header 352 stores source ID 361, data block size information 362, and I-picture start position flag 363. Since I-picture start  
10           position flag 363 is set in the format-dependent reserve area in this manner, the I-picture position in stream data can also be designated in real time (i.e., a transport packet corresponding to the start position of I-picture can be designated) simultaneously with  
15           transfer of stream data in the isochronous mode. This is a great feature of this embodiment.

          Note that the end portion of an application packet area in FIG. 5 (h) may often become blank in place of recording former half 346 of transport packet b of  
20           program 2. In this case, the end portion of the application packet area becomes a stuffing area (having no time stamp at its head position) having the reserved number of bytes.

          A normal packet is appended with a time stamp.  
25           However, as shown in FIG. 5 (i), a time stamp can be omitted in a partial packet.

          In this manner, partial packets (the partial

packet size falls within the range from 1 to 187 bytes  
if the packet size is 188 bytes; an average of less  
than 100 bytes) divided at the boundary of two  
neighboring stream packs (FIG. 5 (j)) can be  
effectively used in information recording. In addition,  
the storage capacity of medium 201 can be increased by  
an amount of each time stamp (e.g., 4 bytes per time  
stamp) omitted from a partial packet.

Note that the position of a time stamp located  
immediately after the first packet in FIG. 5 (i) can be  
specified by first access point 56 in FIG. 1 (a), or  
FIRST\_AP\_OFFSET shown in FIG. 10 (c).

FIG. 6 is a view for explaining the sector  
structure that stores data of a stream object.

FIG. 6 (a) to (d) show contents corresponding to  
FIG. 1 (h) to (k). In the example shown in FIG. 6, all  
stream blocks (SOBUs) # $\alpha$  to # $\gamma$  have a fixed size  
(32 sectors/2 ECC blocks = 64 k bytes). FIG. 6 (f) to  
(j) show the pack structure that form last sector No. n  
of stream block (SOBU) # $\gamma$  and its immediately preceding  
sector No. n-1 (FIG. 6 (e)).

Each sector of stream block (SOBU) # $\gamma$  has a similar  
data structure except for last sector No. n. For  
example, sector No. n-1 has a data structure, as shown  
in FIG. 6 (f).

More specifically, sector No. n-1 is made up of a  
stream pack of 2,048 bytes (2 k bytes). This stream

pack is comprised of a 14-byte pack header and  
2,034-byte stream PES packet.

5 The stream PES packet is comprised of a 6-byte PES  
header, 1-byte substream ID, and 2,027-byte stream data  
area.

The stream data area consists of a 9-byte  
application header, application header extension  
(option), stuffing byte (option), and application  
packet area.

10 The application packet area in FIG. 6 (f) can have  
the same structure as that shown in FIG. 5 (h) and (i)  
(change "packet" in FIG. 5 (h) to read "application  
packet in FIG. 6).

15 The application packet area is made up of a group  
of application packets each having an application time  
stamp (ATS) at its head position (except for a stuffing  
area in FIG. 5 (h) and a partial packet in FIG. 5 (i)).  
For example, when a transport packet having a 188-byte  
size is stored as an application packet in the  
20 application packet area, approximately 10 application  
packets can be stored in the application packet area.

In stream recording, an application that generates  
recording contents makes stuffing by itself to obviate  
the need for independent adjustment of the pack length.  
25 For this reason, in stream recording a stream pack can  
always have a required length (e.g., 2,048 bytes). The  
stuffing byte in FIG. 6 (f) is used to maintain the

predetermined length (2,048 bytes) of a stream pack.

5 Last sector No. n of stream block (SOBU) # $\gamma$  has a data structure shown in FIG. 6 (g) to (j). That is, as shown in FIG. 6 (g), last sector No. n consists of a pack header and padding packet. This padding packet includes padding area 21 (corresponding to padding area 21 in FIG. 1 (k)) in its application packet area, as shown in FIG. 6 (h).

10 The first application packet area in padding area 21 is stuffed with a stuffing packet (zero-byte data having essentially no recording contents) with an application time stamp (ATS), as shown in FIG. 6 (i). If padding area 21 has a length for a plurality of sectors, the second or subsequent application packet area (subsequent stuffing packet) is stuffed with a  
15 stuffing packet (zero-byte data) without any ATS, as shown in FIG. 6 (j).

When recording is done at very low bit rate, the stuffing byte is required to ensure recovery (playback)  
20 of time map information (252 in FIG. 3 (h); or MAPL in SOBI in FIG. 15 to be described later). The stuffing packet in FIG. 6 (i) or FIG. 6 (j) is defined as a conceptual unit for that purpose.

25 The objective of this stuffing packet is achieved when each SOBU includes at least one ATS value as well as the stuffing area.

The following conditions are imposed on the



stuffing packet:

\* One or a plurality of stuffing packets always start from the application packet area of a pack after a pack including actual application packet data; and

5       \* One or a plurality of stuffing packets consist of one 4-byte ATS, and zero byte data (following ATS) required to stuff the application data area of the remaining pack of the SOBU of interest. Assuming that SOBU\_SIZ represents the number of sectors per SOBU, if  
10        $0 \leq n \leq \text{SOBU\_SIZ} - 1$ , the total length of the stuffing packet is "4 + 2,014 +  $n \times 2,018$ " bytes.

ATS of the stuffing packet is set as follows:

\* In an SOBU in which at least one pack includes actual application packet data, ATS of the stuffing  
15       packet is set to be that of an application packet preceding the stuffing packet; and

\* In an SOBU that does not include any actual application packet, ATS of the stuffing packet is determined in accordance with the contents of time map  
20       information or the like.

All packs each of which includes the stuffing packet or a portion of the stuffing packet are configured as follows:

\* SCR of the pack header is set to be the sum  
25       of SCR of the preceding pack and " $2,048 \times 8 \text{ bits} \div 10.08 \text{ Mbps}$ ";

\* The PES packet header and substream ID are the

same as those of all other PES packets; and

\* In the application header (see FIG. 10 (c) and (d)), AP\_Ns = 0, FIRST\_AP\_OFFSET = 0, EXTENSION\_HEADER\_IFO = 00b, and SERVICE\_ID = 0 (other  
5 parameters in the application header are set at zero).

FIG. 7 is a view for explaining the relationship between the video information compression method in MPEG and transport packets, and the relationship between transport packets in MPEG and application  
10 packets in the streamer.

As shown in FIG. 7, broadcast signal information in digital TV adopts a signal compression method called MPEG2. In the signal compression method based on MPEG, images (pictures) for TV display are categorized into  
15 I-picture 501 that does not contain any time differential information, and B-pictures 503 and 504 and P-picture 502 which contain time differential information.

I-picture independently exists without being  
20 influenced by the previous or next image (picture) information, and after DCT transformation for a single image (picture), quantized information becomes I-picture compressed information 511 and is recorded as I-picture information 521. As for P-picture 502, only  
25 differential information 512 from I-picture 501 is recorded as P-picture information 522. As for B-picture 503, two pieces of differential information 513

and 514 from I-picture 501 and P-picture 502 are recorded as B-picture information 523, and as for B-picture 504, two pieces of differential information 515 and 516 from I-picture 501 and P-picture 502 are recorded as B-picture information 524.

As shown in FIG. 7, compressed information 511 of I-picture 501 is recorded in transport packets 1a, 1b,... as I-picture information 521, two pieces of differential information 513 and 514 of B-picture are recorded in transport packets 33a,... as B-picture information 523, two pieces of differential information 515 and 516 of B-picture are recorded in transport packets 41d,... as B-picture information 524, and P-picture differential information 512 is recorded in transport packets (TP) 48h to 298h as P-picture information 522. In this way, I-, B-, and P-picture information are recorded in different transport packets.

Upon video playback, P-picture 502 or B-pictures 503 and 504 cannot solely generate images, but can generate picture images only after the image of I-picture 501 is generated. Pieces of picture information 521 to 524 are divisionally recorded in the payloads of one or a plurality of transport packets. At this time, the information is recorded so that the boundary position of each of picture information 521 to 524 always matches that between neighboring transport packets, as shown in FIG. 7.

In first transport packet 1a that records I-picture information 521, random access indicator 303 (FIG. 5 (a)) is set with flag = "1". On the other hand, in first transport packets 33a, 41a, and 48h of pieces of B-picture information 523 and 524 and P-picture information 522, payload unit start indicator 301 (FIG. 5 (a)) is set with flag = "1". Using information of random access indicator 303 and payload unit start indicator 301, I-picture position flag 58 and picture head position flag 59 in FIG. 1 (a) are generated. Likewise, pieces of information such as cipher information 60 used in copy protection and the like are recorded as bitmap information 43 (FIG. 5 (b)) that pertains to individual transport packets.

Position information (I-picture position information) of I-picture (501) in FIG. 7 is recorded as entry point information (SC\_EPI) 285 in original cell information (SCI) (#1-272 or the like), as shown in FIG. 3 (g) and (h).

The data structure in entry point information 285 has a list format of information of entry point positions (first entry point position (EP\_APAT) 531, second entry point position 532, third entry point position 533, ..., last entry point position 535) indicating individual I-picture position information present in a single stream object, as shown in FIG. 7 (a) and (b).

As the information contents of entry point position (EP\_APAT) 531, the value of time stamp 1a corresponding to transport packet 1a that records the first information of I-picture information 521 is recorded, as shown in FIG. 7 (a). As the information contents of individual entry point positions (EP\_APAT) 532, 533, and 535 as well, the values of time stamps 87f, 183d, and 298g corresponding to transport packets that record the first information of the corresponding I-picture information are similarly recorded.

The corresponding cell start time information and/or the corresponding cell end time information for user-defined cell #11-294 shown in FIG. 4 are/is recorded in user-defined PGC information table 234 in FIG. 3 (f). In this case, when the user wants to play back from B-picture information 524 in FIG. 7, he or she can set time stamp 41d as the corresponding cell start time. In this manner, the corresponding cell start or end time information can be set using arbitrary time stamp information irrespective of the I-picture position.

On the other hand, the start/end time of a stream object in this embodiment is set in consideration of the I-picture position. That is, as the information contents of stream object general information 251 shown in FIG. 3 (h) and (d), recording time (SOB\_REC\_TM) 541 indicating the recording start time, stream object

start time (SOB\_S\_APAT) 542, and stream object end time (SOB\_E\_APAT) 543 are recorded, as shown in FIG. 7 (c).

This stream object start time (SOB\_S\_APAT) 542 must be set with the value of time stamp 1a corresponding to transport packet 1a that records first I-picture information 521. Likewise, stream object end time (SOB\_E\_APAT) 543 must be set with the value of time stamp 298g corresponding to transport packet 298g immediately before I-picture information.

When transport packets in FIG. 7 are recorded by the streamer (optical disc device 415 in FIG. 11 to be described later), the contents of transport packets are transplanted to packets (application packets) with time stamps called application time stamps (ATS).

A group of application packets with ATS (normally, around 10 packets) are stored in an application packet area in a stream PES packet.

One stream pack is formed by appending a pack header to this stream PES packet. The stream PES packet is made up of a PES header, substream ID, application header, application header extension (option), stuffing bytes (option), and application packet area for storing the group of application packets with ATS.

FIG. 8 is a view for explaining the method of setting time map information 252 shown in FIG. 1, etc.

As shown in FIG. 1 (g) or FIG. 8 (b), stream data

recorded by sequentially packing time stamps (TMS) and transport packets (TP) (or application packets AP) are segmented in units of two ECC blocks (32 sectors) to form stream blocks (SOBUs)  $\#\alpha$ ,  $\#\beta$ ,  $\#\gamma$ , ...,  $\#\lambda$ , as shown in FIG. 8 (a).

Time stamp (TMS) 1a is allocated at the head position of stream block (SOBU)  $\#\alpha$ . This time stamp 1a indicates the arrival time (SOBU\_S\_APAT) of the first packet of SOBU $\#\alpha$ . The value [0] of this time stamp 1a is used as the start time of SOBU $\#\alpha$ .

For other stream blocks (SOBU $\#\beta$  to SOBU $\#\lambda$ ), the values ([28], [63], [98], [297]) of time stamps 33a, 65a, 98a, ..., 321a located at the head positions of these stream blocks under the condition that they did not start in the previous sectors are used as the start times of the respective stream blocks (SOBU $\#\beta$  to SOBU $\#\lambda$ ).

Last time stamp 300a immediately before the last packet in each stream block, e.g., last SOBU $\#\lambda$ , indicates the arrival time (SOBU\_E\_APAT) of the last packet of SOBU $\#\lambda$ . The value [300] of this time stamp 300a is used as the end time of SOBU $\#\lambda$ .

When a blank area is formed at the end of last SOBU $\#\lambda$ , this blank area is set as padding area 21 having no actual data (see FIG. 1 (k) or FIG. 6 (h) and (i)).

Assume that the start times of the respective stream blocks (SOBU $\#\alpha$  to SOBU $\#\lambda$ ) are respectively 0, 28,

63, 98, ..., 297, as shown in FIG. 8 (b). These times are indicated by one of (a) seconds, (b) the number of fields or frames/pictures (e.g., 30 pictures/sec or 60 fields/sec for NTSC; 25 pictures/sec or 50 fields/sec for PAL), and (c) a count value based on reference clocks of 27 MHz or 90 kHz.

In the example shown in FIG. 8 (a) and (b), the elapsed time of the first stream block (SOBU# $\alpha$ ) is [28] - [0] = [28] (the number of effective digits = 2). However, since no practical problem is posed if a coarser expression of the elapsed time is used, the units digit is rounded (the retained digit is increased by one) to [30].

The elapsed time of the second stream block (SOBU# $\beta$ ) is [63] - [30] if the rounded result [30] is used. Likewise, the units digit is rounded (the retained digit is increased by one) to [40]. Similarly, the elapsed times of the subsequent stream blocks (SOBU# $\gamma$  to SOBU# $\lambda$ ) are expressed by numerical values rounded to the number of effective digits = 1 (the retained digit is increased by one).

Note that since a stream block after the stream block (SOBU# $\lambda$ ) is not accessed, the time difference value for the last stream block is blank, as shown in FIG. 8 (c).

FIG. 8 (c) shows the relationship between the rounded results and time map information 252.



Since there is no stream block after the stream block (SOBU#λ), a similar differential time computation with another stream block cannot be done. Hence, this embodiment allows the following method for only the last stream block (SOBU#λ). That is, the difference between the value of the last time stamp recorded therein (the value [300] of time stamp 300a in the example in FIG. 8 (b)) and the value of the first time stamp value recorded in the last stream block (SOBU#λ) (the value [297] of time stamp 321a in the example in FIG. 8 (b)) is calculated, and its rounded value is set as the time difference value. FIG. 8 (d) shows this example.

Note that the time difference value of last SOBU#λ in FIG. 8 (d) can be calculated by two methods. In the first method, the value [300] before rounding of last time stamp 300a (SOBU\_E\_APAT of SOBU#λ) and the value [297] before rounding of first time stamp 321a are used, and the time difference value [10] is calculated by rounding their difference [3]. In the second method, the rounded value [300] of last time stamp 300a, and the rounded value [300] of first time stamp 321a are used, and the time difference value [10] is calculated by adding a round error [10] to their difference [0].

In the second method, [0] at the units digit of each numerical value may be removed to obtain a numerical value having the number of effective

digits = 1, and a round error [1] may be used to remove units digits of other numerical values.

FIG. 9 is a view for explaining changes in stream object information and original cell information before and after the recorded stream object is partially erased.

A series of information description methods mentioned above can be applied to a partially erased stream object. FIG. 9 (k) shows a state before partial erase, and the stream data structure that pertains to a stream object, original cell range, and stream object range immediately after recording (SOB#B-299 in FIG. 1 (h), etc.) are shown in FIG. 9 (a) to (e).

The process after portions before and after the range from time stamps 97c to 224c as an actual display range are partially erased will be explained below.

In this embodiment, partial erase is done in units of sectors. However, in order to play back another stream object immediately after a stream object after partial erase is played back, and to attain seamless playback without disturbing images at the boundary of these stream objects, partial erase must be done while holding the GOP boundary position of an MPEG bitstream.

Assume that the I-picture head position immediately before transport packet 97c corresponding to time stamp 97c is present in transport packet 87f, as indicated by a second entry point position 532 in

FIG. 7 (a). In this case, sector No. 87 including transport packet 87f is left, all sectors before that sector are erased, and the value of this time stamp 87f is set to be stream object start time (SOB\_S\_APAT) 542 (see FIG. 9 (1)) of the stream object before partial erase.

As a result, the size of stream block # $\gamma$  decreases from 32 sectors to 30 sectors.

At the same time, the value of the stream block time difference described in time map information 252 in correspondence with the block size decreases from, e.g., 40 to 30. Since the boundary positions among stream blocks # $\delta$  to # $\eta$  remain unchanged before and after partial erase, the information contents in time map information 252 which pertain to that portion remain the same.

If the I-picture head position starts from transport packet 225e (not shown in FIG. 7), sectors up to sector No. 225 in FIG. 9 (i) that includes transport packet 225d are left, and all sectors after that sector are erased.

Stream object end time (SOB\_E\_APAT) 543 in FIG. 9 (j) can be set by time stamp 225d of transport packet 225d.

Corresponding cell start time (SC\_S\_APAT) 283/end time (SC\_E\_APAT) 284 after partial erase are respectively set by time stamps 97c and 224k in

correspondence with the actual designation range of partial erase, as shown in FIG. 9 (i).

5 A characteristic feature of this embodiment lies in that time map information (or stream object information SOBI/original cell information SCI) is generated by such method.

10 Note that the start time and/or end time before and after partial erase change or changes, but the SOBU size remains unchanged (e.g., fixed at 64 k bytes for 32 sectors).

Partial erase may be done in units of SOBUs. In this case, first (or last) time stamp TMS in an original cell is included in the first (or last) SOBU in an SOB.

15 FIG. 10 is a view for explaining the data structure of a stream pack shown in FIG. 5, etc..

Each stream pack has a data structure shown in FIG. 10 (d). One stream pack is formed by 14-byte pack header 11, 6-byte PES header 601, a 1-byte substream ID, a 9-byte application header, an application header extension (option) which is used as needed, a stuffing byte (option) which is used as needed, and an application packet group including one or more application packets each appended with application time stamp ATS (see FIG. 6 (f)).

20

25

Pack header 11 contains pack start code information, system clock reference (SCR) base

information, SCR extension information, program  
multiplexing rate information, pack stuffing length  
information, and the like, as shown in FIG. 10 (g).  
The SCR base consists of 32 bits, and its 32nd bit is  
5 zero. As the program multiplexing rate, for example,  
10.08 Mbps are used.

The PES header includes packet start code prefix  
information, stream ID (private stream 2) information,  
and PES packet length information, as shown in  
10 FIG. 8 (f).

The substream ID has contents for specifying  
stream recording data, as shown in FIG. 8 (f). More  
specifically, substream ID = "00000010b" indicates that  
data stored in that stream pack is stream recording  
15 data. When this stream ID is "10111110b", it indicates  
that the stream pack of interest is used as a padding  
packet (see FIG. 6 (g)).

The application header in FIG. 10 (d) includes  
version information, the number AP\_Ns of application  
20 packets, time stamp position FIRST\_AP\_OFFSET of the  
first application packet, extension header information  
EXTENSION\_HEADER\_IFO, service ID, and the like, as  
shown in FIG. 10 (c).

Note that the version describes the version number  
25 of the application header format.

AP\_Ns in the application header describes the  
number of application packets that start within the

stream pack of interest. If the stream pack of interest stores the first byte of ATS, it is determined that an application packet starts in this stream pack.

5 FIRST\_AP\_OFFSET describes the time stamp position of the first application packet that starts within the stream packet of interest as a relative value (unit: byte) from the first byte in this stream packet. If no application packet starts within the stream packet, FIRST\_AP\_OFFSET describes "0".

10 EXTENSION\_HEADER\_IFO describes whether or not an application header extension and/or stuffing byte are/is present within the stream packet of interest.

15 If the contents of EXTENSION\_HEADER\_IFO are 00b, it indicates that neither the application header extension nor stuffing byte are present after the application header.

20 If the contents of EXTENSION\_HEADER\_IFO are 10b, it indicates that the application header extension is present after the application header, but no stuffing byte is present.

25 If the contents of EXTENSION\_HEADER\_IFO are 11b, it indicates that the application header extension is present after the application header, and the stuffing byte is also present after the application header extension.

The contents of EXTENSION\_HEADER\_IFO are inhibited from assuming 01b.

The stuffing byte (option) before the application packet area is activated by "EXTENSION\_HEADER\_IFO = 11b". In this manner, "packing paradox" can be prevented when the number of bytes in the application header extension is contradictory to the number of application packets that can be stored in the application packet area.

SERVICE\_ID describes the ID of a service that generates the stream. If this service is unknown, SERVICE\_ID describes 0x0000.

FIRST\_AP\_OFFSET in FIG. 10 (c) corresponds to first access point 56 in FIG. 10 (b) or FIG. 1 (a). This first access point 56 is stored in search information 42 (see FIG. 1 (b)) in the pack header (or application header), as shown in FIG. 10 (a).

The stuffing byte and application packet group in FIG. 10 (d) form an application packet area, as shown in FIG. 6 (f). A partial application packet is recorded at the head position of this application packet area. After this packet, a plurality of pairs of application time stamps ATS and application packets are sequentially recorded. At the end of the application packet area, a partial application packet (or stuffing area with the reserved number of bytes) is recorded, as shown in FIG. 5 (h).

In other words, a partial application packet can be present at the start position of the application

packet area, and a partial application packet or a stuffing area with a reserved number of bytes can be present at the end position of the application packet area.

5           The application time stamp (ATS) allocated before each application packet consists of 32 bits (4 bytes). This ATS can be divided into two fields, i.e., a basic field and extended field. The basic field is called a 90-kHz unit value, and the extended field indicates a  
10           less significant value measured at 27 MHz.

          In FIG. 10 (d), the application header extension can be used to store information which can differ between application packets. Such information is not always required for all applications. Therefore, the  
15           data field of the application header is defined to be able to describe the presence of the application header extension as an option in the stream data area (in EXTENSION\_HEADER\_IFO mentioned above).

          Upon recording a stream, the first byte of  
20           application time stamp ATS of the first application packet must be aligned to the start position of the application packet area in the first stream packet at the beginning of stream object SOB.

          On the other hand, as for the subsequent stream  
25           packet in the SOB, an application packet may be segmented (split) at the boundary of neighboring stream packets.



Two transport packets 1k shown in FIG. 1 (g) or partial application packets shown in FIG. 5 (h) and (i) indicate application packets formed by this segmentation (split).

5       The byte offset of the first application time stamp that starts within the stream packet and the number of application packets which start within that stream packet are described in the application header. With this format, stuffing before the first application  
10       time stamp and after the last application packet is automatically done in a given stream packet.

That is, the automatic mechanism allows "the application to make stuffing by itself". With this automatic stuffing, a stream packet can always have a  
15       required length.

The application header extension (option) consists of a list of entries. The list includes one entry having a 1-byte length corresponding to each application packet that starts within the stream packet  
20       of interest. The bytes of these entries can be used to store information which may differ in units of application packets.

Note that the 1-byte application header extension (option) describes 1-bit AU\_START, 1-bit AU\_END, and  
25       2-bit COPYRIGHT, as shown in FIG. 10 (e).

When AU\_START is set at "1", it indicates that a related application packet includes a random access

entry point (start of a random access unit) within the stream. When AU\_END is set at "1", it indicates that a related application packet is the last packet of the random access unit. COPYRIGHT describes the state of  
5 copyright of a related application packet.

The packet structure shown in FIG. 10 can be applied to sectors other than the last sector of the stream object (SOB) of interest, but cannot always be applied to the last sector. The packet structure shown  
10 in FIG. 6 (i) and (j) is applied to the last sector.

FIG. 11 is a block diagram for explaining the arrangement of a stream data recording/playback system (optical disc device/streamer, STB unit) according to an embodiment of the present invention. This  
15 embodiment assumes as information storage medium 201 a recordable/reproducible optical disc such as a DVD-RAM disc or the like.

The internal structure of the stream data recording/playback apparatus according to an embodiment  
20 of the present invention will be described below using FIG. 11.

This stream data recording/playback apparatus comprises optical disc device 415, STB unit 416, and their peripheral devices.

25 The peripheral devices include video mixing unit 405, frame memory 406, external loudspeaker 433, personal computer (PC) 435, monitor TV 437, D/A

converters 432 and 436, I/F units 431 and 434, and the like.

Optical disc device 415 comprises recording/playback unit 409 including a disc drive,  
5 data processor (to be abbreviated as D-PRO hereinafter) 410 for processing stream data to recording/playback unit 409 (or stream data from recording/playback unit 409), temporary storage 411 for temporarily storing stream data that overflows from D-PRO 410, and optical  
10 disc device controller 412 for controlling operations of recording/playback unit 409 and D-PRO 410.

Optical disc device 415 further comprises data transfer interface 414 for receiving stream data sent from STB unit 416 via IEEE1394 or the like (or sending  
15 stream data to STB unit 416 via IEEE1394 or the like), and formatter/deformatter 413 for converting the stream data received by data transfer interface 414 into a signal format that can be recorded on information storage medium (RAM disc) 201 (or converting the stream  
20 data played back from medium 201 into a signal format for, e.g., IEEE1394 or the like).

The IEEE1394 reception side of data transfer interface 414 reads the time from the start of stream data transfer on the basis of the time count value of  
25 reference clock generator (system time counter STC) 440.

Based on the time information, delimiter information for dividing stream data in units of stream

blocks (or in units of SOBUS) is generated, and cell division information, program division information, and PGC division information are generated in correspondence with this delimiter information.

5           Formatter/deformatter 413 converts the stream data sent from STB unit 416 into a stream pack sequence (see FIG. 5 (j), etc.), and inputs the converted stream pack sequence to D-PRO 410. Each of the input stream packs has a constant size of 2,048 bytes, which is equal to  
10           the sector size. D-PRO 410 combines the input stream packs in units of 16 sectors to form ECC blocks, and sends the ECC blocks to recording/playback unit 409.

When recording/playback unit 409 is not ready to record data on medium 201, D-PRO 410 transfers recording data to temporary storage 411 to temporarily save them therein, and waits until recording/playback unit 409 is ready to record data.

When recording/playback unit 409 is ready to record data, D-PRO 410 transfers data saved in temporary storage 411 to recording/playback unit 409. In this manner, recording on medium 201 is started. Upon completion of recording of data saved in temporary storage 411, the subsequent data are seamlessly transferred from formatter/deformatter 413 to D-PRO 410. Assume that a large-size memory is used as temporary storage 411 so as to store recording data for several minutes or more by high-speed access.

Note that time stamp information appended to the recording bitstream via formatter/deformatter 413 can be obtained from reference clock generator (STC) 440. On the other hand, time stamp information (SCR) extracted from the playback bitstream via formatter/deformatter 413 can be set in STC 440.

Each pack header in the stream data recorded on information storage medium 201 records a reference clock (system clock reference SCR). When the stream data (SOB or SOBU) recorded on this medium 201 is played back, reference clock generator (STC) 440 is adjusted to the reference clock (SCR) played back from medium 201 (the SCR value is set in STC 440).

That is, in order to play back SOB or SOBU data, the reference clock (STC 440) in the streamer (optical disc device 415) is adjusted to system clock reference SCR described in the first stream pack from which playback starts. After that, STC 440 is automatically counted up.

STB unit 416 comprises demodulator 422 for demodulating the contents of a digital broadcast wave received by satellite antenna 421, and providing demodulated data (stream data) that multiplexes one or more programs, and reception information selector 423 for selecting information of a specific program (of user's choice) (taking FIG. 5 as an example, a transport packet of program 2) from data demodulated by

demodulator 422.

When the information (transport packet) of the specific program selected by reception information selector 423 is to be recorded on information storage medium 201, selector 423 sends stream data containing only the transport packet of the specific program to data transfer interface 414 of optical disc device 415 by IEEE1394 transfer via data transfer interface 420 in accordance with an instruction from STB controller 404.

Data transfer interface 414 in optical disc device 415 temporarily converts stream data transferred according to IEEE1394 into the format shown in FIG. 5 (d), and pairs of time stamps and transport packets as shown in FIG. 5 (d) are packed and recorded in turn on information storage medium 201.

When the user merely reviews the information (transport packet) of the specific program selected by reception information selector 423 without recording it, selector 423 sends stream data containing only the transport packet of the specific program to multiplexed information demultiplexer 425 of decoder unit 402 in accordance with an instruction from STB controller 404.

On the other hand, when a program recorded on information storage medium 201 is to be played back, stream data sent from optical disc device 415 to STB unit 416 via an IEEE1394 serial bus is sent to multiplexed information demultiplexer 425 of decoder

unit 402 via selector 423.

5           Multiplexed information demultiplexer 425  
classifies various packets (video packets, audio  
packets, and sub-picture packets) contained in the  
stream data sent from selector 423 on internal memory  
426 on the basis of their IDs. Then, demultiplexer 425  
distributes the classified packets to corresponding  
decoders (video decoder 428, sub-picture decoder 429,  
and audio decoder 430).

10           Video decoder 428 decodes (MPEG-encoded) video  
packets sent from multiplexed information demultiplexer  
425 to generate moving picture data. Video decoder 428  
incorporates representative image (thumbnail) generator  
439 to provide a function of generating a reduced-scale  
15   picture (thumbnail picture) that represents the  
recorded contents from I-picture in MPEG video data in  
such case.

          Moving picture data (and/or the representative  
image generated by generator 439) decoded by video  
20   decoder 428, sub-picture data (information of  
superimposed dialogs, menus, and the like) decoded by  
sub-picture decoder 429, and audio data decoded by  
audio decoder 430 are sent to video mixing unit 405 via  
video processor 438.

25           Video mixing unit 405 generates a digital video by  
superposing the superimposed dialogs and the like on  
the moving picture using frame memory 406. This

digital video is converted into an analog video via D/A converter 436, and the analog video is sent to monitor TV 437.

Also, the digital video from video mixing unit 405 is fetched as needed by personal computer 435 via I/F unit 434 and a signal line such as IEEE1394 or the like.

On the other hand, digital audio information decoded by audio decoder 430 is sent to external loudspeaker 433 via D/A converter 432 and an audio amplifier (not shown). Also, decoded audio information is digitally output to an external device via I/F unit 431.

Note that the operation timing in STB unit 416 is determined by clocks from system time counter (STC) 424.

The aforementioned instructions, etc., from STB controller 404 (operation control of the internal components of STB unit 416) are executed by a control program stored in program memory 404a. In this case, work memory 407 is used as needed in the control process of STB controller 404.

The internal operation timings of STB unit 416 including STB controller 404 and decoder unit 402 can be restricted by clocks from STC unit 424. By synchronizing STC 440 of optical disc device 415 with STC unit 424 of STB unit 416, the operation timings of the overall streamer system including optical disc device 415 and STB unit 416 can be restricted.



As a method of synchronizing STC 440 with STC unit 424, a method of setting STC 440 and STC unit 424 using a reference clock (SCR) in stream data exchanged between data transfer interfaces 414 and 420 is  
5 available.

In optical disc device 415 (streamer) in FIG. 11, pairs of time stamps and transport packets (FIG. 5 (h) and (i)) are recorded on information storage medium 201 as they are.

10 When the user instructs to record, for example, the second program in FIG. 5 (c) on an information storage medium (201 in FIG. 3 (a)), reception information selector 423 in STB unit 416 shown in FIG. 11 extracts only transport packets b and e of  
15 program 2. At that time, STB unit 416 appends reception time information of transport packets b 522 and e 525 in the form of time stamps 331 and 332, as shown in FIG. 5 (d).

After that, when data is transferred to  
20 formatter/deformatter 413 in FIG. 11 according to the IEEE1394 transfer scheme, the pairs of time stamps and transport packets are transferred while being segmented into small units, as shown in FIG. 5 (e).

Formatter/deformatter 413 in FIG. 11 temporarily  
25 converts stream data transferred by IEEE1394 from STB unit 416 into the format shown in FIG. 5 (d) (corresponding to the format shown in FIG. 1 (g)). A

bitstream in the format shown in FIG. 5 (d) (a stream  
pack sequence in FIG. 5 (j)) is recorded on information  
storage medium 201. More specifically, in an  
embodiment of the present invention, pack headers and  
5 PES headers which record system clock information and  
the like are inserted at the head positions of  
respective sectors (see FIG. 5 (j), etc.).

A plurality of time stamps and transport packets  
(FIG. 1 (g)) are packed in data areas (FIG. 1 (f)), and  
10 one transport packet (packet 1k in FIG. 1 (g); packet b  
of program 2 in FIG. 5 (d)) is recorded across a  
plurality of sectors (Nos. 0 and 1 in FIG. 1 (e);  
partial packets in FIG. 5 (h) and (i)). This is one  
feature of the present invention.

15 Using the data structure that utilizes this  
feature, a packet having a size larger than the sector  
size (e.g., 2,048 bytes) can be recorded. This point  
will be described in more detail below.

Digital broadcast adopts a multi-program  
20 compatible multiplexing/demultiplexing scheme called a  
transport stream, as shown in FIG. 5 (c), and one  
transport packet b-522 often has a size of 188 bytes (or  
183 bytes). As described above, one sector size is  
2,048 bytes, and each data area (FIG. 1 (f)) can record  
25 approximately 10 transport packets for digital  
broadcast even after various header sizes are  
subtracted. By contrast, in a digital communication

network such as ISDN or the like, a long packet having a packet size as large as 4,096 bytes is often transferred.

Using the data structure that utilizes the feature  
5 (capable of recording one packet data across a plurality of packets) so that each of data areas 21, 22, and 23 (FIG. 1 (f)) can record not only a plurality of transport packets, but also a packet with a large packet size such as a long packet, one packet is  
10 recorded across a plurality of data areas. As a result, all packets, i.e., transport packets for digital broadcast, a long packet for digital communications, and the like can be recorded in a stream block without any fractions independently of their packet sizes.

15 The device arrangement in STB unit 416 shown in FIG. 11 can be functionally divided/categorized into a "reception time management module", "stream data content analysis module", "stream data transfer module", and "time related information generation module".

20 Note that the "reception time management module" is comprised of demodulator (demodulation unit) 422, reception information selector 423, multiplexed information demultiplexer 425, STB controller 404, and so on. The "reception time management module" receives  
25 digital TV broadcast via satellite antenna 421, and records reception times in units of transport packets in the received broadcast information.

5

10

15

25

5

10

15

25

as shown in FIG. 3 (e) to (h).

As shown in FIG. 3 (i), time map information 252 records only time stamp differential time information of each stream block. Hence, the values of time differences of stream blocks in time map information 252 are summed up in each of stream object information 242 or 243, and comparison must be made to check if this summed-up value has reached the time stamp time designated by STB unit 416. Based on the comparison result, the position of a stream block in a stream object, which block includes the time stamp value that matches the time designated by STB unit 416, is detected.

An embodiment that pertains to partial erase of stream data already recorded on information storage medium 201 will be explained below.

In the stream data recording/playback apparatus, the aforementioned partial erase process is controlled by STB controller 404, and process implementation is done especially by a sequential program named a stream data partial erase controller in that controller 404.

STB controller 404 in FIG. 11 reads information of STREAM.INFO 105 that describes management information (STRI) which pertains to stream data before partial erase, and temporarily saves that information in work RAM memory 407. Upon completion of the partial erase process, sectors to be partially erased are excluded

from STREAM.VRO (or SR\_TRANS.SRO) 106 in FIG. 2. After that, the management information STRI including SOBI and SCI) is changed to the contents shown in FIG. 9 (1), thus rewriting data in STREAM.IFO 105 in FIG. 2.

5           The access method "which corresponds to video compression by MPEG, and considers the decode timing of the decoder" will be explained below as that to stream data playback of which is to begin in a stream object.

10           In an embodiment of the present invention, stream data is transferred from STB unit 416 in isochronous mode and, at the same time, I-picture information is transferred in real time. The transferred information is recorded in the STREAM.VRO 106 file that records stream data, as shown in FIG. 1 (a). In an embodiment  
15           of the present invention, this information is also recorded in STREAM.IFO 105 that records management information of stream data.

20           When STB unit 416 shown in FIG. 11 is to play back and display, e.g., B-picture information 504 in FIG. 7, it informs optical disc device 415 of the value of time stamp 1a corresponding to transport packet 1a which is located at the head position of I-picture information 501 located immediately before B-picture information 504.

25           Optical disc device 415 detects the sector position from which playback is to start using information of time map information 252 with the

structure shown in FIG. 1 or 3, accesses a  
predetermined position on information storage medium  
201, and transfers stream data to be played back to STB  
unit 416. Decoder unit 402 in STB unit 416 begins to  
5 decode from I-picture information 501, and starts  
display from designated B-picture information 504.

Transport packet 41d (FIG. 7) that records start  
information of B-picture information 504 records, in  
its transport packet header 311, information of  
10 playback time stamp (presentation time stamp) PTS 304  
which indicates the display start time, as shown in  
FIG. 5 (a) and (b). Decoder unit 402 reads this PTS  
305 to set the playback start time.

The method of extracting the I-picture position by  
15 decoder unit 402 in FIG. 11 has been explained.  
However, some digital TV broadcast station may send  
each picture position information in the process of  
transmission. Each picture position information  
already recorded in the process of transmission will be  
20 explained below.

In an embodiment of the present invention, the  
stream block boundary positions set upon initial  
recording are maintained even for stream data after  
partial erase, while the remaining portion is re-  
25 defined in a new stream object to have the partially  
erased portion as a boundary. In this case, the first  
and last stream blocks in a stream object often have



sizes smaller than those of other stream blocks. For this reason, time map information 252 records individual stream block size information, as shown in FIG. 1 (1) or FIG. 3 (i).

5           This embodiment is not limited to the aforementioned specific example. For example, only the first stream block size information and last stream block size information may be recorded, and only common stream block size information may be recorded for other  
10 stream blocks.

FIG. 12 is a flow chart for explaining the processes of alignment between an application packet and stream object and a padding process at the end of a stream object when information recording of a bitstream  
15 is done by the system shown in FIG. 11.

In optical disc device (streamer) 415 in FIG. 11, a bitstream (the contents of a transport packet) to be recorded is distributed to application packet areas in a stuffing packet (step ST10).

20           The first byte (A) of an application time stamp (ATS) of the first application packet is compared with the start portion (B) of an application packet area in the first stream packet which is located at the start portion of a stream object (SOB) that records a  
25 bitstream (step ST12).

If the first byte (A) of the ATS does not match the start portion (B) of the application packet area in

the first stream packet (NO in step ST14), for example, a required number of stuffing bytes are inserted in the stream packet to align the first byte (A) with the start portion (B) (step ST16).

5           If the first byte (A) of the ATS matches the start portion (B) of the application packet area in the first stream packet (YES in step ST14), or after the first byte (A) and start portion (B) are aligned, it is checked if a blank for one stream packet (one sector)  
10 or more is present between the end of the last application packet (C) containing actual data of the bitstream to be recorded, and the end (D) of the SOB that records the bitstream (step ST18).

15           If the blank for one stream packet (one sector) or more is present between the end of the application packet (C) and the end (D) of the SOB (YES in step ST18), this blank is stuffed with one or more stuffing packets including one ATS (step ST20).

20           If no blank is present between the end of the application packet (C) and the end (D) of the SOB (NO in step ST18), or after the blank between the end of the application packet (C) and the end (D) of the SOB is stuffed with stuffing packets, a group of one or more application packets (that can contain stuffing  
25 packets or a stuffing byte area as needed) containing the contents of the bitstream to be recorded is recorded on information medium 201 (step ST22).

After that, a write is made to the management information (STRI) in correspondence with the recorded information (step ST24).

5 In the recording step ST22, the following process is done as needed.

(10) When a blank portion is present at the end of an application packet area, a stuffing area (padding area 37 in FIG. 5 (h) or FIG. 19 (j)) consisting of a predetermined number of bytes is assured in this blank portion (without any time stamp).

In the recording steps ST22 and ST24, the following processes are done as needed.

(11) Stream data (SOB) is formed by a plurality of data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$  in FIG. 8 (a)),  
15 each data unit (SOBU# $\alpha$ , ..., SOBU# $\lambda$ ) is formed by one or more data packets (TP/AP in FIG. 8 (b)) that record predetermined time stamp (TMS) information, and the time difference value (rounded value in FIG. 8 (c) and (d)) corresponding to at least the difference  
20 between the first time stamp (TMS 1a) recorded in the first data unit (SOBU# $\alpha$ ) and the second time stamp (TMS 33a) recorded in the second data unit (SOBU# $\beta$ ) of a plurality of the data units (SOBU# $\alpha$ , ..., SOBU# $\lambda$ ) is recorded in the management area (STRI or  
25 STREAM.IFO/SR\_MANGR.IFO).

(12) One or more pieces of cell (FIG. 18) information are recorded in stream data (SOB),

program chain (PGC) information (PGCI in FIG. 3 (f) or 13) that describes a group of one or more cells is recorded in the management area (STRI or STREAM.IFO/SR\_MANGR.IFO), and

5 entry point (EP) information (SC\_EPI) that can be used as a marker of a skip position upon partially skipping the recorded contents of the stream data (SOB) in playback is recorded in the management information (STRI).

10 (13) Stream object general information (SOBI\_GI in FIG. 7 (d) or 15) including at least one of recording time information (SOB\_REC\_TM) of stream data (SOB), the data packet arrival time (SOB\_S\_APAT) of the start portion of the stream data (SOB), and the data  
15 packet arrival time (SOB\_E\_APAT) of the end portion of the stream data (SOB) is written in management information (STRI).

FIG. 13 is a view for explaining the internal data structure of management information (STREAM.IFO or  
20 SR\_MANGR.IFO in FIG. 2 or FIG. 3) of the streamer.

STREAM.IFO (SR\_MANGR.IFO) 105 as management information (navigation data) shown in FIG. 2 or FIG. 3 (e) includes streamer information STRI, as shown in FIG. 13.

25 This streamer information STRI is comprised of streamer video manager information STR\_VMGI, stream file information table SFIT, original PGC information

ORG\_PGCI (more generally, PGC information PGCi#i),  
user-defined PGC information table UD\_PGCIT, text data  
manager TXTDT\_MG, and application private data manager  
APDT\_MG, as shown in FIG. 3 (f) or FIG. 13.

5           Streamer video manager STR\_VMGI includes video  
manager information management information VTSI\_MAT  
that describes management information which pertains to  
STRI and STR\_VMGI, and the like, and a play list search  
pointer table (PL\_SRPT) that describes search pointers  
10       used to search for a play list in the stream, as shown  
in FIG. 13.

          Note that the play list is a list of portions of a  
program. With this play list, the user can define an  
arbitrary playback sequence (for the contents of a  
15       program).

          Stream file information table SFIT includes all  
navigation data that directly pertain to the streamer  
operation. Details of stream file information table  
SFIT will be explained later with reference to FIG. 15.

20           Original PGC information ORG\_PGCI is a portion  
that describes information which pertains to an  
original PGC (ORG\_PGC). ORG\_PGC indicates navigation  
data which describes a program set. ORG\_PGC is a chain  
of programs, and includes stream data recorded in a  
25       ".SRO" file (SR\_TRANS.SRO 106 in FIG. 2) shown in  
FIG. 2 or FIG. 18 to be described later

          Note that the program set indicates the entire

recorded contents (all programs) of information storage medium 201. Upon playing back the program set, the same playback order as the recording order of programs is used except for a case wherein an arbitrary program has been edited, and the playback order of original recording has been changed. This program set corresponds to a data structure called an original PGC (ORG\_PGC).

Also, a program is a logical unit of recorded contents, which is recognized by the user or is defined by the user. A program in the program set is made up of one or more original cells. The program is defined within only the original PGC.

Furthermore, a cell is a data structure indicating a portion of a program. A cell in the original PGC is called an "original cell", and a cell in a user-defined PGC (to be described later) is called a "user-defined cell".

Each program in the program set consists of at least one original cell. A portion of a program in each play list consists of at least one user-defined cell.

On the other hand, only a stream cell (SC) is defined in the streamer. Each stream cell looks up a portion of the recorded bitstream. In an embodiment of the present invention, a "cell" means a "stream cell" unless otherwise specified.

Note that a program chain (PGC) is a generic unit. In an original PGC, PGC indicates a chain of programs corresponding to a program set. On the other hand, in a user-defined PGC, PGC indicates a chain of portions of programs corresponding to a play list.

A user-defined PGC indicating a chain of portions of programs includes navigation data alone. A portion of each program looks up stream data belonging to the original PGC.

User-defined PGC information table UD\_PGCIT in FIG. 13 can include user-defined PGC information table information UD\_PGCITI, one or more user-defined PGC search pointers UD\_PGC\_SRP#n, and one or more pieces of user-defined PGC information UD\_PGCI#n.

User-defined PGC information table information UD\_PGCITI includes UD\_PGC\_SRP\_Ns indicating the number of user-defined PGC search pointers UD\_PGC\_SRP, and UD\_PGCIT\_EA indicating the end address of user-defined PGC information table UD\_PGCIT (not shown).

The number of "UD\_PGC\_SRP"s indicated by UD\_PGC\_SRP\_Ns is the same as the number of pieces of user-defined PGC information (UD\_PGCI), and is also the same as the number of user-defined PGCs (UD\_PGC). The maximum value of UD\_PGC\_SRP\_Ns is "99".

UD\_PGCIT\_EA describes the end address of UD\_PGCIT of interest by the relative number of bytes (F\_RBN) from the first byte of that UD\_PGCIT.

Note that F\_RBN indicates the relative number of bytes from the first byte of the defined field, and starts from zero.

PGCI#i that generally expresses original PGC information ORG\_PGCI or user-defined PGC information UD\_PGCI in user-defined PGC information table UD\_PGCIT will be described later with reference to FIG. 14.

Text data manager TXTDT\_MG in FIG. 13 is supplementary text information. This TXTDT\_MG can be stored in the play list and program together with primary text information PRM\_TXTI shown in FIG. 14.

Application private data manager APDT\_MG in FIG. 13 can include application private data manager general information APDT\_GI, one or more APDT search pointers APDT\_SRP#n, and one or more APDT areas APADTA#n (not shown).

Note that application private data APDT is a conceptual area that allows an application device connected to the streamer to store arbitrary non-real time information (more desired information in addition to real-time stream data).

FIG. 14 is a view for explaining the internal data structure of PGC Information (ORG\_PGCI/UD\_PGCIT in FIG. 3 or PGCI#i in FIG. 13). PGC information PGCI#i in FIG. 14 generally expresses original PGC information ORG\_PGCI or user-defined PGC information UD\_PGCI in user-defined PGC information table UD\_PGCIT in FIG. 13.



As shown in FIG. 14, PGC information PGCi#i is made up of PGC general information PGC\_GI, one or more pieces of program information PGI#m, one or more stream cell information search pointers SCI\_SRP#n, and one or more pieces of stream cell information SCI#n.

PGC general information PGC\_GI includes the number PG\_Ns of programs, and the number SCI\_SRP\_Ns of stream cell information search pointers SCI\_SRP.

Each program information PGI (e.g., PGI#1) includes program type PG\_TY, the number C\_Ns of cells in the program of interest, primary text information PRM\_TXTI of the program of interest, and search pointer number IT\_TXT\_SRPN of item text.

Note that program type PG\_TY includes information indicating the state of the program of interest. Especially, program type PG\_TY includes a flag indicating if that program is protected from an erase error, i.e., a protect flag.

When this protect flag is "0b", the program of interest is not protected; when it is "1b", the program is protected.

The number C\_Ns of cells indicates the number of cells in the program of interest. In all the programs and cells in a PGC, cells (tacitly) append themselves to each program in their ascending order.

For example, if program #1 in a given PGC has C\_Ns = 1, and program #2 has C\_Ns = 2, first stream

cell information SCI of that PGC is appended to program #1, and the second SCI and third SCI are appended to program #2.

5 Primary text information PRM\_TXTI describes text information having a single common character set (ISO/IEC646:1983 (ASCII code)) to allow use of information storage medium (DVD-RAM disc) 201 anywhere in the world.

10 Item text search pointer number IT\_TXT\_SRPN describes a search pointer number corresponding to item text (text data corresponding to the program of interest) IT\_TXT. If the program of interest has no item text, IT\_TXT\_SRPN is set at "0000h".

15 Each stream cell information search pointer SCI\_SRP (e.g., SCI\_SRP#1) includes SCI\_SA indicating the start address of corresponding stream cell information SCI. This SCI\_SA is described as the relative number of bytes (F\_RBN) from the first byte of PGCi.

20 Each stream cell information SCI (e.g., SCI#1) is made up of stream cell general information SC\_GI and one or more pieces of stream cell entry point information SC\_EPI#n.

25 Stream cell general information SC\_GI includes cell type C\_TY including flag TE indicating a temporary erase (TE) state, the number SC\_EPI\_Ns of pieces of entry point information of a stream cell, stream object

number SOB\_N, stream cell start APAT (SC\_S\_APAT shown  
in FIG. 9), stream cell end APAT (SC\_E\_APAT shown in  
FIG. 9), erase start APAT (ERA\_S\_APAT) indicating start  
APAT of a temporary erase cell if that cell is in the  
5 temporary erase state (TE = 01b), and erase end APAT  
(ERA\_E\_APAT) indicating end APAT of a temporary erase  
cell if that cell is in the temporary erase state (TE =  
10b).

Cell type C\_TY describes the type and temporary  
10 erase state of the stream cell of interest.

More specifically, cell type C\_TY1 = "010b" is  
described in the type of all stream cells (with this  
C\_TY1 = "010b", a stream cell can be distinguished from  
other cells).

15 On the other hand, if flag TE is "00b", it  
indicates that the cell of interest is in a normal  
state; if flag TE is "01b" or "10b", that cell is in a  
temporary erase state.

Flag TE = "01b" indicates that the cell of  
20 interest (cell in the temporary erase state) starts  
from a position after the first application packet that  
starts within a SOBU, and comes to an end at a position  
before the last application packet in that SOBU.

On the other hand, flag TE = "10b" indicates that  
25 the cell of interest (cell in the temporary erase  
state) includes at least one SOBU boundary (the first  
or last application packets starts within that SOBU).

Note that a protect flag of a program and TE flag of a cell in that program cannot be set at the same time. Therefore,

- 5 (a) none of cells in a program in the protect state can be set in the temporary erase state; and
- (b) a program including one or more cells in the temporary erase state cannot be set in the protect state.

10 The number SC\_EPI\_Ns of pieces of entry point information of a stream cell describes the number of pieces of stream cell entry point information included in stream cell information SCI of interest.

15 Each stream cell entry point information SC\_EPI (e.g., SC\_EPI#1) in FIG. 14 includes two types (types A and B).

SC\_EPI of type A includes entry point type EP\_TY and entry point application packet arrival time EP\_APAT. Type A is set by entry point type EP\_TY1 = "00b".

20 SC\_EPI of type B includes primary text information PRM\_TXTI in addition to EP\_TY and EP\_APAT of type A. Type B is indicated by entry point type EP\_TY1 = "01b".

25 As a tool for skipping a portion of the recorded contents in an arbitrary stream cell, an entry point can be used. All entry points can be specified by application packet arrival times (APAT). This APAT can specify the data output start position.

Stream object number SOB\_N describes the number of



disc) 201, the number SOB\_STI\_Ns of pieces of stream object stream information that follow SFITI, end address SFIT\_EA of SFIT, and start address SFI\_SA of SFI.

5           SFIT\_EA describes the end address of SFIT by the relative number of bytes (F\_RBN) from the first byte of SFIT.

10           SFI\_SA describes the start address of SFI by the relative number of bytes (F\_RBN) from the first byte of SFIT.

15           Stream object stream information SOB\_STI includes three different parameters. Each parameter can assume a value unique to individual bitstream recording. However, these parameter sets can have equal values in most bitstream recording. Therefore, SOB\_STI is stored in a table independently from the table of stream object information (SOBI), and some stream objects (SOB) are allowed to share identical SOB\_STI (i.e., point to identical SOB\_STI). Therefore, the number of pieces of SOB\_STI is generally larger than the number of SOBs.

20           Each stream object stream information SOB\_STI (e.g., SOB\_STI#1) in FIG. 15 includes application packet size AP\_SIZ, the number SERV\_ID\_Ns of service IDs, service ID (SERV\_IDS), and application packet device unique ID (AP\_DEV\_UID).

          AP\_SIZ describes the application packet size by

the byte length of a packet in a bitstream transferred from an application device to the streamer.

In the DVD streamer, the application packet size is fixed in each bitstream recording. For this reason,  
5 if the application packet size changes in each recording free from any interrupt, the current stream object (current SOB) comes to an end there, and a new stream object (new SOB) starts with new AP\_SIZ. In this case, the current and new SOBs belong to an  
10 identical program in original PGC information (ORG\_PGC I).

SERV\_ID\_Ns describes the number of service IDs included in the subsequent parameter.

SERV\_IDS describes a list of service IDs in an  
15 arbitrary order.

AP\_DEV\_UID describes a unique device ID unique to an application device that supplies the recorded bitstream.

As shown in FIG. 15, stream file information SFI  
20 is comprised of stream file general information SF\_GI, one or more stream object information (SOB information) search pointers (SOBI\_SRP) #n, and one or more pieces of SOB information (SOBI) #n.

Stream file general information SF\_GI includes the  
25 number SOBI\_Ns of pieces of SOBI, and sector size SOBU\_SIZ per SOBU.

SOBU\_SIZ describes the SOBU size using the number

of sectors, and this size is fixed at 32 (32 sectors = 64 k bytes). This means that the first entry is associated with an application packet included in the first 32 sectors of an SOB. Likewise, the second entry is associated with an application packet included in the next 32 sectors. The same applies to the third and subsequent entries.

Each SOB information search pointer (e.g., SOBI\_SRP#1) includes start address SOBI\_SA of SOBI. This SOBI\_SA describes the start address of the associated SOBI using the relative number of bytes (F\_RBN) from the first byte of stream file information SFI.

Each SOB information (e.g., SOB#1) is made up of stream object general information SOB\_GI, time map information MAPL, and access unit data AUD (option).

Stream object general information SOB\_GI includes stream object type SOB\_TY, stream object recording time SOB\_REC\_TM, stream object stream information number SOB\_STI\_N, access unit data flag AUD\_FLAGS, stream object start application packet arrival time SOB\_S\_APAT, stream object end application packet arrival time SOB\_E\_APAT, start stream object unit SOB\_S\_SOB\_U of the stream object of interest, and the number MAPL\_ENT\_Ns of entries in time map information.

Stream object type SOB\_TY is a field that describes bits indicating the temporary erase state (TE



state) and/or bits of the copy generation management system.

Stream object recording time SOB\_REC\_TM describes the recording time of the associated stream object (SOB).

Stream object stream information number SOB\_STI\_N describes an index of valid SOB\_STI for the stream object of interest.

Access unit data flag AUD\_FLAGS describes whether or not access unit data (AUD) is present for the stream object of interest, and the type of access unit data if it is present.

If access unit data (AUD) is present, AUD\_FLAGS describes some properties of AUD.

The access unit data (AUD) itself consists of access unit general information AU\_GI, access unit end map AUEM, and playback time stamp list PTSL, as shown in FIG. 15.

Access unit general information AU\_GI includes AU\_Ns indicating the number of access units described in correspondence with the SOB of interest, and access unit start map AUSM indicating an SOBU that belongs to the SOB of interest and includes an access unit.

Access unit end map AUEM is a bit array having the same length as that of AUSM (if it is present), and indicates an SOBU that includes the terminal end of a bitstream segment appended to the access unit of the

SOB of interest.

Playback time stamp list PTSL is a list of  
playback time stamps of all access units that belong to  
the SOB of interest. One PTSL element included in this  
5 list includes a playback time stamp (PTS) of the  
corresponding access unit.

Note that the access unit (AU) indicates an  
arbitrary single, continuous portion of the recorded  
bitstream, and is suitable for individual playback.  
10 For example, in an audio/video bitstream, an access  
unit corresponds to I-picture of MPEG.

The contents of SOB\_GI will be explained again.

AUD\_FLAGS includes flag RTAU\_FLG, flag AUD\_FLG,  
flag AUEM\_FLG, and flag PTSL\_FLG.

15 When flag RTAU\_FLG is 0b, it indicates that no  
access unit flag is present in real-time data of the  
SOB of interest.

When flag RTAU\_FLG is 1b, it indicates that AU  
flags (AU\_START, AU\_END) described in the application  
20 header extension shown in FIG. 10 (d) can be present in  
real-time data of the SOB of interest. This state is  
also allowed when AUD\_FLG (to be described below) is 0b.

When flag AUD\_FLG is 0b, it indicates that no  
access unit data (AUD) is present for the SOB of  
25 interest.

When flag AUD\_FLG is 1b, it indicates that access  
unit data (AUD) can be present for the SOB of interest.

When flag AUEM\_FLG is 0b, it indicates that no AUEM is present in the SOB of interest.

When flag AUEM\_FLG is 1b, it indicates that AUEM is present in the SOB of interest.

5       When flag PTSL\_FLG is 0b, it indicates that no PTSL is present in the SOB of interest.

When flag PTSL\_FLG is 1b, it indicates that PTSL is present in the SOB of interest.

10       SOB\_S\_APAT describes the start application packet arrival time of a stream object. That is, SOB\_S\_APAT indicates the arrival time of the first application packet that belongs to the SOB of interest.

15       This packet arrival time (PAT) is divided into two fields, i.e., a basic field and extended field. The basic field is called a 90-kHz unit value, and the extended field indicates a less significant value measured at 27 MHz.

20       SOB\_E\_APAT describes the end application packet arrival time of a stream object. That is, SOB\_E\_APAT indicates the arrival time of the last application packet that belongs to the SOB of interest.

25       SOB\_S\_SOB� describes the start stream object unit of the stream object of interest. That is, SOB\_S\_SOB� indicates an SOB� including the start portion of the start application packet of the stream object.

MAPL\_ENT\_Ns describes the number of entries in time map information (MAPL) that follows SOBI\_GI.

Time map information MAPL has contents corresponding to time map information 252 shown in FIG. 3 (h).

One of relevancies between the contents of  
5 FIGS. 13 and 15 is summarized as follows:

Streamer information STRI included in management information 105 contains stream file information table SFIT that manages stream object SOB which forms the contents of stream data. This SFIT includes stream  
10 object information SOBI that manages SOB. This SOBI includes access unit general information AU\_GI including management information (access unit start map AUSM), and management information (PTSL).

Note that the management information (ATS or AUSM)  
15 contains information used upon transferring stream data, and the management information (PTS or SC\_S\_APAT) contains information used when the stream data is displayed.

FIG. 16 is a view exemplifying the correspondence  
20 between the access unit start map (AUSM) and stream object unit (SOBU).

As shown in FIG. 16, bit "1" of AUSM indicates that the access unit (AU) is included in the corresponding SOBU.

25 Assume that  $AUSM\_pos(i)$  represents the  $i$ -th ( $1 \leq i \leq AU\_Ns$ ) bit position where a bit is set in AUSM. Then, the position of access unit AU is as follows.

(1) If SOBU#i indicated by AUSM\_pos(i) contains one or more start AUs (described using AU\_START and AU\_END marks in a stream (if available)), AUSM\_pos(i) is assigned to the first AU that starts within SOBU#i.

5 Note that SOBU#i is laid out in SOBUs described using AUSM\_pos(i) and AUEM\_pos(i) (if AUEM is available).

(2) AU comes to an end at the AU\_END mark that appears first after this AU starts, and comes to an end in the last SOBU indicated by the assigned AUEM element (if AUEM is available).

10

In any access unit data, two or more accessible access units cannot be described per SOBU in an SOB.

FIG. 17 is a view exemplifying the correspondence between the access unit start map (AUSM) and access unit end map (AUEM), and stream object unit (SOBU).

15

AUEM is a bit array having the same length as the AUSM (if available). The bits of AUEM indicate a SOBU that includes the end of a bitstream segment appended to the access unit of the SOB of interest.

20

The number of bits set in AUEM matches that set in AUSM. That is, the set bits in AUSM have those set in AUEM in correspondence with each other.

Assume that AUSM\_pos(i) represents the i-th ( $1 \leq i \leq \text{AU\_Ns}$ ) bit position where a bit is set in AUSM, and AUEM\_pos(i) the i-th ( $1 \leq i \leq \text{AU\_Ns}$ ) bit position where a bit is set in AUEM. In this case, the following relations hold:

25

- (1)  $1 \leq \text{AUSM\_pos}(i) \leq \text{AUEM\_pos}(i) \leq \text{MAPL\_ENT\_Ns}$ ;  
(2)  $\text{AUSM\_pos}(i+1) > \text{AUEM\_pos}(i)$ ;  
(3) If  $i == \text{AU\_Ns}$  or  $\text{AUSM\_pos}(i+1) > 1$   
AUEM\_pos(i), AU#i comes to an end in SOBU#[AUEM\_pos(i)]  
5 (1 ≤ i ≤ AU\_Ns); and  
(4) If  $\text{AUSM\_pos}(i+1) == 1 + \text{AUEM\_pos}(i)$ , AU#i  
comes to an end in SOBU#[AUEM\_pos(i)]. Or it comes to  
an end at the position of SOBU#[1 + AUEM\_pos(i)] ==  
SOBU#[AUSM\_pos(i+1)]. That is, AU#i comes to an end at  
10 the beginning of AU#i+1 in SOBU (1 ≤ i ≤ AU\_Ns).

FIG. 18 is a view showing an example of the relationship defined between cells designated by an original or user-defined PGC, and SOBUs corresponding to these cells via time map information.

15 A user-defined PGC does not contain its own SOB, but looks up an SOB in an original PGC. Therefore, the user-defined PGC can be described using only PGC information. This means that an arbitrary playback sequence can be implemented without modifying SOB data.

20 The user-defined PGC does not contain any program, and is made up of a chain of cells corresponding to portions of programs in the original PGC.

FIG. 18 shows an example of such user-defined PGC. In this example, user-defined PGC#n is formed so that a  
25 cell in the PGC looks up an SOB in an original PGC.

Referring to FIG. 18, PGC#n has four cells #1 to #4. Of these cells, two cells look up SOB#1, and the

remaining two cells look up SOB#2.

The solid arrows from cells in the user-defined PGC to the original PGC (time map information of an SOBI) indicate the playback periods of those cells.

5 The cell playback order in the user-defined PGC becomes quite different from that in the original PGC.

Playback of an arbitrary SOB and its SOBUs is specified by start APAT (S\_APAT) and end APAT (E\_APAT) in FIG. 18.

10 S\_APAT of the SOB or SOBU is defined in association with a time stamp recorded in the payload (see FIG. 5 (b)) of a stream pack of the SOB of interest.

15 During SOB recording, each incoming application packet is appended with a time stamp by the local clock reference in the streamer. This is the application packet arrival time (APAT).

20 APAT of the start application packet of the SOB is stored as SOB\_S\_APAT. Four least significant bytes of all APATs are fixed in advance for a corresponding application packet in a "\_SRO" file.

25 In order to play back data of the SOB or SOBU, the internal reference clock of the streamer is set at an SCR value, and clocks are then automatically counted. This SCR value is described in the first stream pack (pack header) from which playback begins. Based on the clocks, all subsequent application packets are played

back and output from the SOB or SOBU.

When an arbitrary stream cell (SC) defines stream cell start APAT (SC\_S\_APAT) that has an arbitrary value between SOB\_S\_APAT and SOB\_E\_APAT of an SOB that SC  
5 points to, an address used to find out an SOBU that includes an application packet with a desired APAT is required.

The number of stream packs per SOBU is constant, but the intervals of arrival times captured by SOBUs  
10 are flexible. Therefore, each SOB has time map information that describes the arrival time intervals of its SOBUs. That is, the address system implemented by time map information converts arbitrary APAT into a relative logical block address in the file to point to  
15 an SOBU that contains a desired application packet.

Entry points (EP#i, EP#k) exemplified in FIG. 18 can be specified by application packet arrival times (APAT) each indicating a data output start position. The application packet arrival time of this entry point  
20 is indicated by EP\_APAT in FIG. 14.

Using the entry point, upon playback from, e.g., SOBU#1 of cell #1, playback can start from the designated position of SOBU#i while skipping SOBU#2 to SOBU#(i-1).

25 FIG. 19 is a view for explaining the data structure of stream data according to another embodiment of the present invention.



Stream data recorded on an information storage medium such as a DVD-RAM disc or the like are combined as stream objects (SOB) in units of contents of video information in stream data. Each SOB is formed of stream data obtained by single real-time, continuous recording.

FIG. 19 (f) shows one SOB#A-298 of one or more stream objects. When this stream data is recorded on a DVD-RAM disc, each data is recorded using 2,048-byte sectors as minimum units. Furthermore, 16 sectors form one ECC block, and in one ECC block, data are interleaved (the order of data is re-arranged) and a correction code for error correction is appended.

In this embodiment, a stream block is formed by one or a plurality of ECC blocks as a unit, and stream information is recorded or partially erased in units of stream blocks.

In this embodiment, the number of ECC blocks that form a stream block can be determined in accordance with the transfer rate of stream data to be transferred. For example, in an example shown in FIG. 19 (e), stream block #1 is formed by two ECC blocks # $\alpha$  and # $\beta$ , and stream block #2 is formed by three ECC blocks # $\gamma$ , # $\delta$ , and # $\epsilon$ . A DVD streamer forms one stream block (stream object unit SOBU) using two ECC blocks (32 sectors).

Each ECC block is made up of 16 sectors, as shown in FIG. 19 (d). Therefore, as can be seen from FIG. 19

(d) and (e), stream block (or SOBU) #1 made up of two ECC blocks corresponds to 32 sectors (sectors No. 0 to No. 31).

More specifically, if one sector = 2 k bytes, a  
5 stream block (SOBU) has a fixed size of 64 k bytes  
(32 sectors) upon practicing the present invention.

The contents of each sector correspond to a stream  
pack (see FIGS. 5, 6, and 10 for details). For example,  
a stream pack corresponding to sector No. 0 (FIG. 19  
10 (d)) includes pack header 1x, PES header 6x, stream  
block header 11x, and data area 21x, as shown in  
FIG. 19 (c). On the other hand, a stream pack  
corresponding to sector No. 1 (FIG. 19 (d)) includes  
pack header 2x, PES header 7x, sector data header 12x,  
15 and data area 22x, as shown in FIG. 19 (c).

Data area 21x in FIG. 19 (c) includes a sequence  
of pairs of time stamps and transport packets (time  
stamp a, transport packet a, time stamp b,...,  
transport packet d), as shown in FIG. 19 (b). Likewise,  
20 data area 22x includes another sequence of pairs of  
time stamps and transport packets. On the other hand,  
trailing-side data area 23x includes transport packet  
f, end code 31x, and padding area 36x, as shown in  
FIG. 19 (b).

25 A plurality of pairs of time stamps and transport  
packets shown in FIG. 19 (b) form a bitstream having a  
sequence shown in FIG. 19 (a).

Stream block #1 (FIG. 19 (e)) preceding SOB#A.298 (FIG. 19 (f)) has a data structure shown in FIG. 19 (d) to (b), but the data structure of stream block #2 (FIG. 19 (g)) succeeding SOB#A.298 is as follows.

5           That is, trailing-side sector No. 78 (FIG. 19 (h)) of end ECC block #ε of stream block #2 includes pack header 3x, PES header 8x, sector data header 13x, and data area 24x, as shown in FIG. 19 (i). Also, last sector No. 79 (FIG. 19 (h)) of ECC block #ε includes  
10           pack header 4x and padding packet 40x, as shown in FIG. 19 (i).

          Data area 24x of sector No. 78 includes transport packet z, end code 32x, and padding area 37x, as shown in FIG. 19 (j). Padding packet 40x of last sector  
15           No. 79 includes PES header 9x and padding area 38x, as shown in FIG. 19 (j).

          Note that the contents of padding area 37x can be comprised of one or more pairs of time stamps and packets, and a stuffing area with a reserved number of  
20           bytes (the stuffing area is appended with no time stamp), as shown in FIG. 5 (h). In this case, no stream data is recorded in the stuffing area.

          On the other hand, the contents of padding area 38x can be comprised of an application packet area  
25           including stuffing packets (only the first one is appended with application time stamp ATS), as shown in FIG. 6 (i) and (j).

The present invention can also adopt data structures with the following features:

5 A) A data structure in which pack headers/packet headers are provided in units of sectors/stream packs, and information required for each sector/stream pack is recorded in a pack header/packet header (see FIG. 1 (a) to (c), FIG. 5 (a) and (b), and FIG. 10 (a) to (g)).

10 B) A data structure that records time information which pertains to the time interval at which respective transport packets/application packets are transferred to the decoder on an information storage medium as time stamp information together with the transport packets/application packets (see FIG. 1 (k) to (m) and FIGS. 5 to 10).

15 C) A data structure that packs and records time stamps and transport packets/application packets at locations other than pack headers/packet headers in a sector/stream pack. A data structure that allocates and records one of a time stamp and transport  
20 packet/application packet to a position in the neighboring sector/stream pack when the division (or cutting portion) of the time stamp or that of stream data recorded in units of transport packets/application packets is different from the boundary position of the  
25 sector/stream pack (see FIG. 1 (d) to (g) and FIG. 5 (e) to (j)).

D) A data structure which defines a group of

videos obtained by single recording of the user or the  
like as a stream object (SOB), and defines an area  
after the position of the last transport packet/  
application packet as a padding area only within a  
5 sector/stream pack of interest when the position of the  
last transport packet/application packet (the position  
of the last transport packet/application packet in a  
single stream object) recorded on an information  
storage medium in single video recording is different  
10 from the boundary position of a sector/stream pack (see  
FIG. 1 (g) and (k), FIG. 6 (g) to (j), and FIG. 19 (j)).

E) A data structure which provides, onto an  
information storage medium, a management file  
(STREAM.IFO or RTR.IFO) that manages stream data in a  
15 file (STREAM.VRO or RTR\_MOV.VRO) that records stream  
data, in addition to that file, so as to facilitate  
search and/or edit of stream data.

F) A data structure which uses the values of time  
stamps recorded in the STREAM.VRO file or RTR\_MOV.VRO  
20 file to identify/designate individual transport  
packets/application packets in the management file  
(STREAM.IFO or RTR.IFO) that manages stream data (see  
FIG. 8 (b) to (d)).

G) A data structure which forms a unit named a  
25 stream block (or a data unit called stream object unit  
SOBU) by combining a plurality of sectors on the  
management file (STREAM.IFO or RTR.IFO), and provides

time map information which has time information in units of stream blocks (SOBUs) to the management file, so as to facilitate time search (see FIG. 8 (a) to (d)).

Note that the data sizes of at least the first and last stream blocks (SOBUs) in a stream object may be recorded in the time map information in the management file (STREAM.IFO or RTR.IFO) (see FIG. 3 (i)).

H) A data structure that manages the value of the first time stamp in each stream block (SOBU) (except for a time stamp recorded continuously from the previous stream block) as the start time of each stream block (SOBU) in the management file (STREAM.IFO or RTR.IFO) (see FIG. 8 (a) to (d)).

More specifically, the value of the first time stamp (e.g., TMS 1a in FIG. 8 (b)) in each stream block (SOBU) is recorded in the time map information in the management file.

A stream data recording method according to the present invention uses an information storage medium which can record information in units of first recording units (sectors or stream packs), and records stream data segmented into second recording units (transport packets/application packets).

In a first recording area (stream recording area 222 in FIG. 3 (d)) that records stream data in units of second recording units (transport packets/application packets), packet header (or pack header) information

assigned to each first recording unit (sector/stream  
pack), time stamp information having time information  
that pertains to stream data of the second recording  
unit (transport packet/application packet), and stream  
5 data in units of second recording units (transport  
packets/application packets) are recorded.

When the division (or cutting portion) of the time  
stamp information or that of stream data recorded in  
units of second recording units (transport  
10 packets/application packets) is different from the  
boundary position of a first recording unit  
(sector/stream pack), the time stamp information or  
stream data recorded in units of second recording units  
(transport packets/application packets) is recorded  
15 across a plurality of first recording units  
(sectors/stream packs) (see former half 346 of  
transport packet b of program 2 in FIG. 5 (e), and  
FIG. 5 (h) to (j)).

In the stream data which is recorded finally  
20 on the information storage medium, when the end  
position of a second recording unit (transport  
packet/application packet) is different from the  
boundary position of a first recording unit  
(sector/stream pack), predetermined data (e.g., all  
25 "1" bits or all "0" bits) is recorded as a padding area  
(21 in FIG. 1 (k) or FIG. 6 (h)) in an area after the  
end position of the finally recorded first recording

unit (sector/stream pack) or second recording unit (transport packet/application packet) (see FIG. 6 (i) and (j)).

5 A second recording area (STREAM.IFO or RTR.IFO) that stores management information pertaining to recorded data is recorded in the first recording area (stream recording area 222) (see FIG. 3 (d) and (e)).

10 A third recording unit (stream block/SOBU) is formed by collecting a plurality of first recording units (sectors/stream packs) with respect to a third recording area (stream file information) that records time information which pertains to the first recording area (stream recording area 222) (see FIG. 6 (b) to (e) and FIG. 8 (a) and (b)).

15 The difference value between pieces of time stamp information allocated at the head positions of the third recording units (stream blocks/SOBUs) with respect to stream data recorded in the first recording area (stream recording area 222) is recorded as time  
20 map information (see FIG. 1 (i) to (m) and FIG. 8 (a) to (d)).

Also, an information storage medium having a data structure in which stream data are recorded by the aforementioned method is a characteristic feature of  
25 the present invention.

Furthermore, as a method that allows partial erase in units of transport packets in consideration of the



I-picture start position, the following method is used.

I) A stream object is newly segmented before and after the partial erase position.

5 J) Information of stream file information that describes information which pertains to a STREAM.VRO file or RTR\_MOV.VRO file that records stream data, and playback unit information (cell information) used upon playback of stream data are stored in a management file (STREAM.IFO or RTR.IFO).

10 K) A partial erase process is done in units of sectors for the STREAM.VRO file or RTR\_MOV.VRO file that records stream data.

15 L) A stream object is segmented on the management file (STREAM.IFO or RTR.IFO) in accordance with the I-picture start position.

More specifically, stream file information (SOBI\_GI.251 in FIG. 7 (d)) stores stream object start time information (SOB\_S\_APAT 542 in FIG. 7 (c)), and stream object end time information (SOB\_E\_APAT 543 in FIG. 7 (c)). After partial erase, the value of a time stamp (1a in FIG. 7) corresponding to a transport packet (1a in FIG. 7) that records the I-picture start position is changed (or additionally written) to the value of the stream object start time (SOB\_S\_APAT 542), and the value of a time stamp (TMS 298g in FIG. 7) corresponding to a transport packet (TP 298g in FIG. 7) that precedes a transport packet which records the

I-picture start position immediately after stream data including the partial erase boundary position is changed (or additionally written) to the value of the stream object end time (SOB\_E\_APAT 543).

- 5           M) On the management file (STREAM.IFO or RTR.IFO), the start/end positions in cell information are set in correspondence with transport packets which are designated to undergo partial erase.

10           More specifically, a partial erase range is designated in units of transport packets. The value of a time stamp (TMS 97c in FIG. 9 (j)) corresponding to a start transport packet of those which fall outside the designated range is set as the corresponding cell start time (SC\_S\_APAT 283 in FIG. 9 (l)) of a new original  
15           cell, and the value of a time stamp (TMS 224k in FIG. 9 (j)) corresponding to the last transport packet is set as the corresponding cell end time (SC\_E\_APAT 284 in FIG. 9 (l)), thus changing (additionally writing) the contents of the management file (STREAM.IFO or RTR.IFO)  
20           accordingly.

          An information medium to which the aforementioned partial erase method can be applied is a medium that allows information recording in units of first recording units (sectors). This medium has a first  
25           recording area (STREAM.VRO or RTR\_MOV.VRO) that records stream data, and a second recording area (STREAM.IFO or RTR.IFO) that records management information which



recording area (STREAM.IFO or RTR.IFO).

The advantageous effects obtained upon practicing the present invention are summarized as follows.

1. Since time information for each transport  
5 packet is recorded, as time stamp information, on the  
information storage medium together with the transport  
packet,

a) the transfer timing of each transport packet  
to the STB unit can be detected in correspondence with  
10 the time stamp value.

b) Since each transport packet can be transferred  
to the decoder at the timing corresponding to the time  
stamp value, decoding and image-displaying can be  
stably done without any failure even if no buffer is  
15 available on the decoder side.

c) Since individual transport packets can be  
identified and discriminated using the time stamp value,  
the arrival position upon access and/or the edit range  
can be easily designated.

2. Time stamps and transport packets are  
20 sequentially packed and recorded in the remaining  
portion of a sector after a packet header is excluded.  
When the division (or cutting portion) of a time stamp  
or that of stream data recorded in units of transport  
25 packets is different from the boundary position of a  
sector, either the time stamp or transport packet is  
recorded to a position being across to the neighboring

sector, and a padding area is set in only a sector at the video recording end position (or, the last position of a stream object).

For this reason, stream data can be efficiently  
5 recorded on the information storage medium. As a result, stream data divided in units of transport packets can be recorded without decreasing the actual capacity of the information storage medium.

3. Time stamps and transport packets are  
10 sequentially packed and recorded in the remaining portion of a sector after a packet header is excluded. When the division (or cutting portion) of a time stamp or that of stream data recorded in units of transport packets is different from the boundary position of a  
15 sector, either the time stamp or transport packet is recorded to a position being across to the neighboring sector, and a padding area is set in only a sector at the video recording end position (last position of a stream object).

20 Since contents of a packet can be recorded across adjacent sectors, a large packet having a size larger than the sector size (2,048 bytes) can be recorded.

4. According to an embodiment of the present invention, a time stamp is not always located  
25 immediately after a packet header in each sector. Hence, as a method of extracting time information in units of stream blocks, the embodiment of the present

invention may use the value of the first time stamp in each stream block (except for a time stamp recorded to extend from the previous stream block) as the start time of the stream block.

5           By so doing, time map information in the management file (STREAM.IFO or RTR.IFO) can be generated, and a prescribed transport packet can be easily accessed using this time map information.

10           5. When stream data in the STREAM.VRO or RTR\_MOV.VRO file are allowed to be partially erased in units of sectors, the STREAM.VRO or RTR\_MOV.VRO file can be partially released in units of minimum recording units (or, in units of sectors) with respect to an information storage medium such as a DVD-RAM or the like. As a result, sectors released from the  
15           STREAM.VRO or RTR\_MOV.VRO file can be effectively used to, e.g., record computer data later.

20           Assume a case wherein partial erase is allowed only in units of stream blocks (SOBUs) as partial erase units different from the above-mentioned case (to partially release the STREAM.VRO or RTR\_MOV.VRO file). Under this assumption, even when the user designates partial erase within a range as small as the sector size, part of the STREAM.VRO or RTR\_MOV.VRO file cannot  
25           be practically released due to too narrow a partial erase range. As a result, the small partial erase range designated by the user cannot be used to record



After partial erase, the time stamp value corresponding to a transport packet that records the I-picture start position is re-set to the value of the stream object start time. Or, after partial erase, the time stamp value corresponding to a transport packet that precedes a transport packet which records the I-picture start position located immediately after stream data including the partial erase boundary position is re-set to the value of the stream object end time.

By so doing, it is possible to perform partial erase of stream data (or to perform splitting/segmenting the stream data) to have the I-picture start position as the boundary position.

As a result,

- a) since the decoder can always start decoding from the I-picture start position, display can start from an arbitrary position in units of frames; and
- b) since the I-picture position can always be detected from information of the management file (STREAM.IFO or RTR.IFO), and stream data are split or segmented to have I-picture start positions as boundaries, when a plurality of different stream objects are successively played back, video playback can be seamlessly and continuously made without disturbing images at the division (or change point at cutting portion) of stream objects.

8. When a flag indicating the I-picture position



is provided to each of isochronous packet headers 343  
and 344, STB unit 416 can inform optical disc device  
415 of I-picture position information, in real time,  
simultaneously with transfer of stream data (transport  
5 packets).

As a result, I-picture position information can be  
easily recorded in the stream data recording file  
(STREAM.VRO or RTR\_MOV.VRO) in real time, and the I-  
picture position information can also be easily  
10 recorded in the management file (STREAM.IFO or RTR.IFO).

Additional advantages and modifications will  
readily occur to those skilled in the art. Therefore,  
the invention in its broader aspects is not limited to  
the specific details and representative embodiments  
15 shown and described herein. Accordingly, various  
modifications may be made without departing from the  
spirit or scope of the general inventive concept as  
defined by the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A method of recording information on an  
information medium which has a data area for recording  
stream data using stream packets each of which includes  
5 an application packet area containing one or more  
application packets with time stamps, and a management  
area for recording management information that pertains  
to the stream data, said method comprising:

distributing the stream data to the application  
10 packet areas in the stream packets so that the  
distributed stream data are recorded in the application  
packet areas,

wherein information recording is performed such  
that a start portion of the application packet area  
15 included in a first one of the stream packets of the  
stream data matches a first byte of the time stamp  
appended to a first one of the application packets in  
the application packet area.

2. A method of recording information on an  
20 information medium which has a data area for recording  
stream data using stream packs each of which includes  
an application packet area having one or more  
application packets with time stamps, and a management  
area for recording management information that pertains  
25 to the stream data, said method comprising:

distributing the stream data to the application  
packet areas in the stream packs so that the

distributed stream data are recorded in the application packet areas; and

when a blank portion is present at an end of the application packet area, providing a stuffing area  
5 formed of a predetermined number of bytes in the blank portion.

3. A method of recording information on an information medium which has a data area for recording stream data using stream packs each of which includes  
10 an application packet area having one or more application packets with time stamps, and a management area for recording management information that pertains to the stream data, said method comprising:

distributing the stream data to the application  
15 packet areas in the stream packs, and recording the distributed stream data in the application packet areas; and

as a result of recording the distributed stream data, if a blank portion of one or more of the stream  
20 packs appears between an end of a last one of the stream packs that actually contains the stream data, and an end of the data area for recording the stream data, then recording a stuffing packet in the blank portion.

25 4. An information recording method using an information medium which has a data area for recording stream data using data packets and data units each

being larger than the data packet, and a management area for recording management information that pertains to the stream data, said method comprising:

5 constituting the stream data by a plurality of the data units;

constituting each of the data units by one or more data packets each of which records predetermined time stamp information; and

10 recording, in the management area, at least a time difference value corresponding to a difference between a first time stamp recorded in a first data unit and a second time stamp recorded in a second data unit, said first and second data units being included in a plurality of said data units.

15 5. A method according to claim 4, wherein the time difference value is determined by rounding to a predetermined number of effective digits a difference between a time information value corresponding to the second time stamp and a time information value  
20 corresponding to the first time stamp.

6. A method according to claim 4, wherein a value of a first time stamp recorded in a first one of the data packets located in the data unit is used to compute the time difference value.

25 7. A method according to claim 4, wherein a time stamp recorded in the data packet at an end of a last one of the data units included in the stream data

indicates an arrival time of a last one of the data packets in the last data unit, and the arrival time of the last data packet is used to compute the time difference value.

5           8. An information recording method using an information medium which has a data area for recording stream data using data packets and data units each being larger than the data packet, and a management area for recording management information that pertains  
10 to the stream data, said method comprising:

          recording information of one or more cells in the stream data;

          recording, in the management area, program chain information that describes a set of one or more of the  
15 cells; and

          recording, in the management area, information of an entry point which can be used as a marker of a skip position upon partially skipping recorded contents of the stream data in playback.

20           9. A method according to claim 8, wherein the management area includes stream object general information which includes at least one of recording time information of the stream data, a data packet arrival time of a start portion of the stream data, and  
25 a data packet arrival time of an end portion of the stream data.

          10. A data structure which has a data area for

recording stream data using predetermined data recording units, and a management area for recording management information that pertains to the stream data, wherein

5           a plurality of stream packs, each of which contains one or more of the data recording units with time stamps, are provided, and the stream data are distributed to these stream packs,

10           each of the stream packs contains a pack header and a stream packet, and

15           a start portion of an application packet area included in a first one of the stream packets of the stream data matches a start byte of the time stamp appended to a first one of the data recording units in the application packet area.

20           11. A data structure according to claim 10, wherein the stream packet includes a stuffing byte of a variable length including zero byte length, and the application packet area including one or more of the data recording units with time stamps.

25           12. A data structure which has a data area for recording stream data using data packets and data units each being larger than the data packet, and a management area for recording management information that pertains to the stream data, wherein

          the stream data are distributed to application packet areas each including one or more of the data

packets, and

when a blank portion is present at an end of the application packet area, a stuffing area formed of a predetermined number of bytes is provided in the blank portion.

13. A data structure according to claim 12, wherein if a blank portion of one or more stream packs appears between an end of a last one of the stream packs that actually contains the stream data, and an end of the data area for recording the stream data, then a stuffing packet is recorded as padding data in the blank portion.

14. A data structure which has a data area for recording stream data using data packets and data units each being larger than the data packet, and a management area for recording management information that pertains to the stream data, wherein

the stream data includes a plurality of the data units,

each of the data unit includes one or more of the data packets each recording time stamp information, and

a time difference value corresponding to a difference between a first time stamp recorded in a first data unit and a second time stamp recorded in a second data is recorded in the management area, said first and second data units being included in said data units.

15. A data structure according to claim 14,  
wherein the time difference value is determined by  
rounding to a predetermined number of effective digits  
a difference between a time information value  
5 corresponding to the second time stamp and a time  
information value corresponding to the first time stamp.

16. A data structure according to claim 14,  
wherein a value of a first time stamp recorded in a  
first one of the data packets located in the data unit  
10 is used to compute the time difference value.

17. A data structure according to claim 14,  
wherein a time stamp recorded in the data packet at an  
end of a last one of the data units included in the  
stream data indicates an arrival time of a last one of  
15 the data packets in the last data unit, and the arrival  
time of the last data packet is used to compute the  
time difference value.

18. A data structure which has a data area for  
recording stream data using a data packet and a data  
20 unit larger than the data packet, and a management area  
for recording management information that pertains to  
the stream data, wherein

one or more pieces of cell information are  
recorded in the stream data,  
25 information of a program chain that describes a  
set of one or more cells is recorded in the management  
area, and





ABSTRACT OF THE DISCLOSURE

5 An information medium which has a data area for recording stream data (SOB) using stream packets each of which includes an application packet area, and a management area for recording management information that pertains to the stream data (SOB) is used. The stream data (SOB) are distributed and recorded in the application packet areas in a plurality of the stream PES packets. When the start portion of the application  
10 packet area included in the first stream PES packet in the stream data (SOB) does not match the first byte of a time stamp appended to the first application packet in the application packet area, then information is recorded so that they match.

1/18

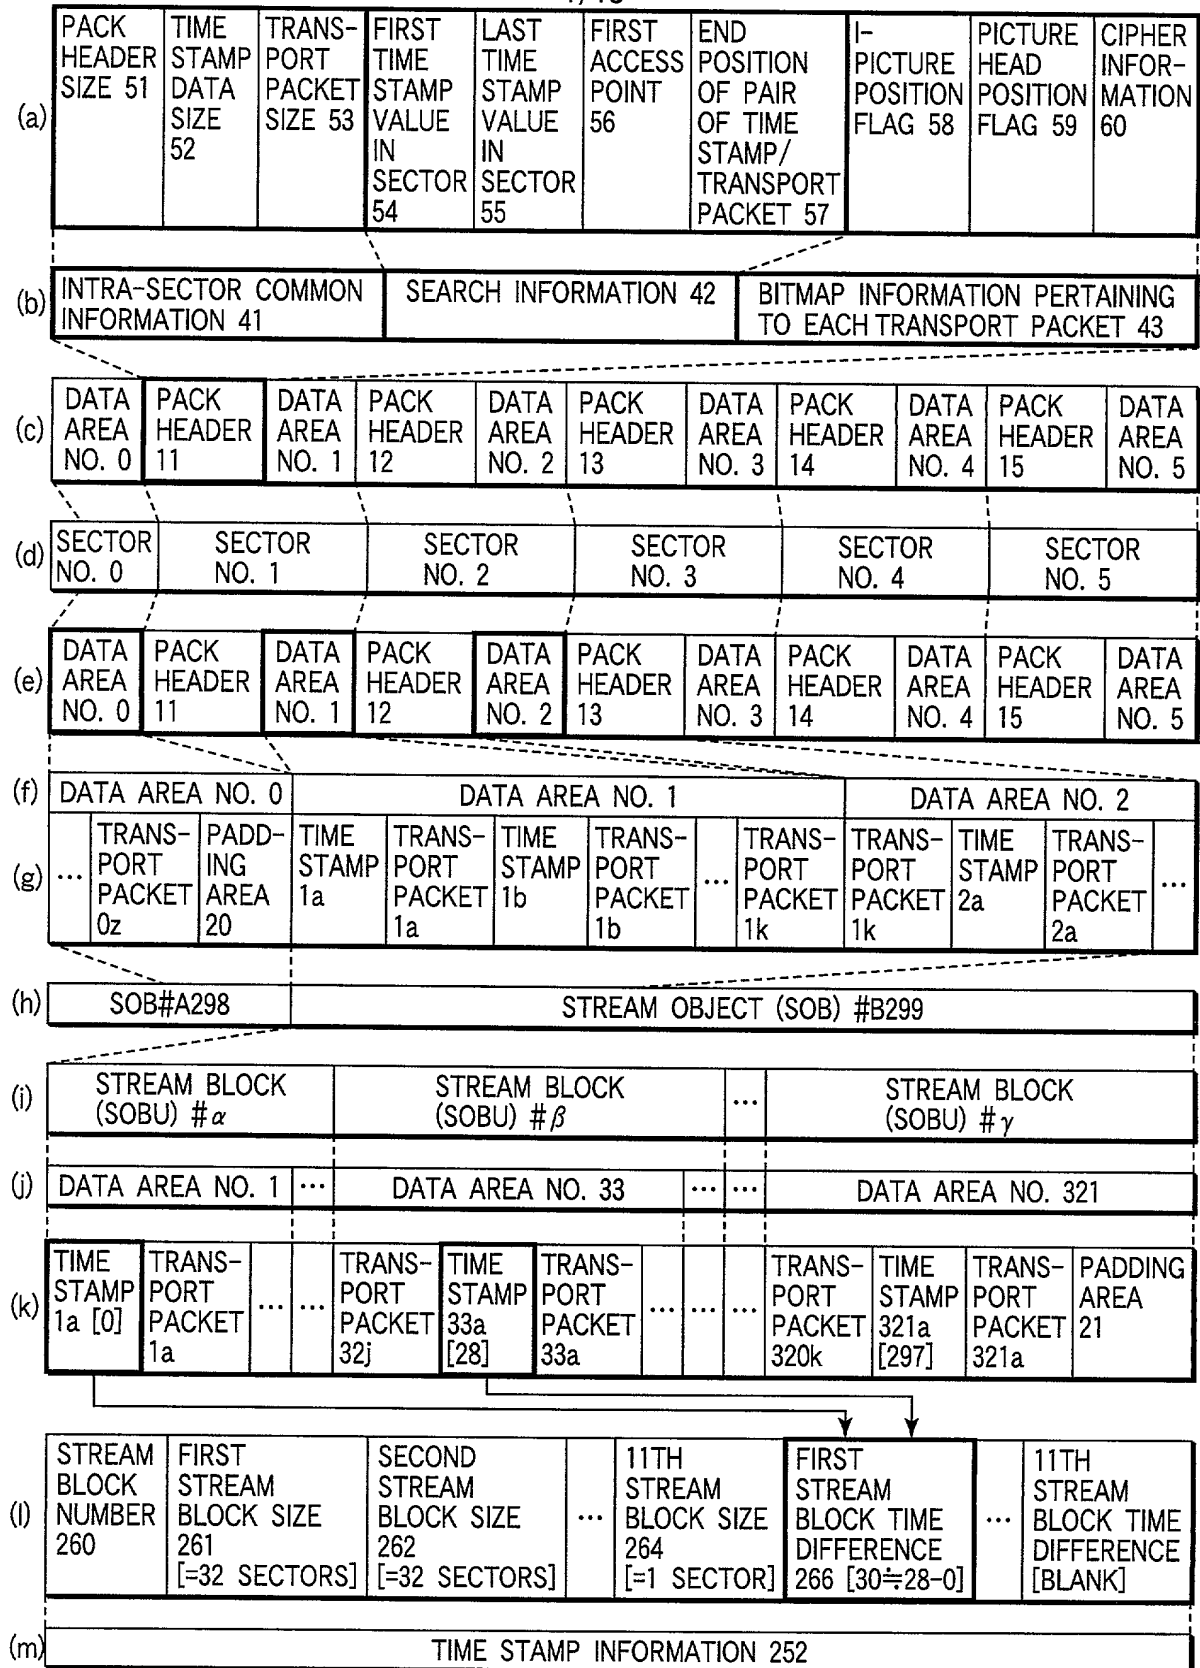


FIG. 1

2/18

ROOT DIRECTORY 100

SUBDIRECTORY 101

DVD\_RTR DIRECTORY (DVD\_RTAV) 102

DATA FILE 103

RTR. IFO (VR\_MANGR. IFO; NAVIGATION DATA) 104

STREAM. IFO (SR\_MANGR. IFO/SR\_MANGR.BUP)  
(NAVIGATION DATA) 105

SR\_PRIVT. DAT/SR\_PRIVT. BUP (NAVIGATION DATA UNIQUE TO  
APPLICATION) 105a

STREAM. VRO (SR\_TRANS. SRO)  
(STREAM DATA) 106

RTR\_MOV. VRO (VR\_MOVIE. VRO; MOVIE REAL-TIME VIDEO  
OBJECT) 107

RTR\_STO. VRO (VR\_STILL. VRO; STILL PICTURE REAL-TIME  
VIDEO OBJECT) 108

RTR\_STA. VRO (VR\_AUDIO. VRO; AUDIO OBJECT OF  
POSTRECORDED AUDIO, ETC.) 109

SUBDIRECTORY 110

VIDEO\_TS (VIDEO TITLE SET) 111

AUDIO\_TS (AUDIO TITLE SET) 112

SUBDIRECTORY FOR SAVING COMPUTER DATA 113

FIG. 2

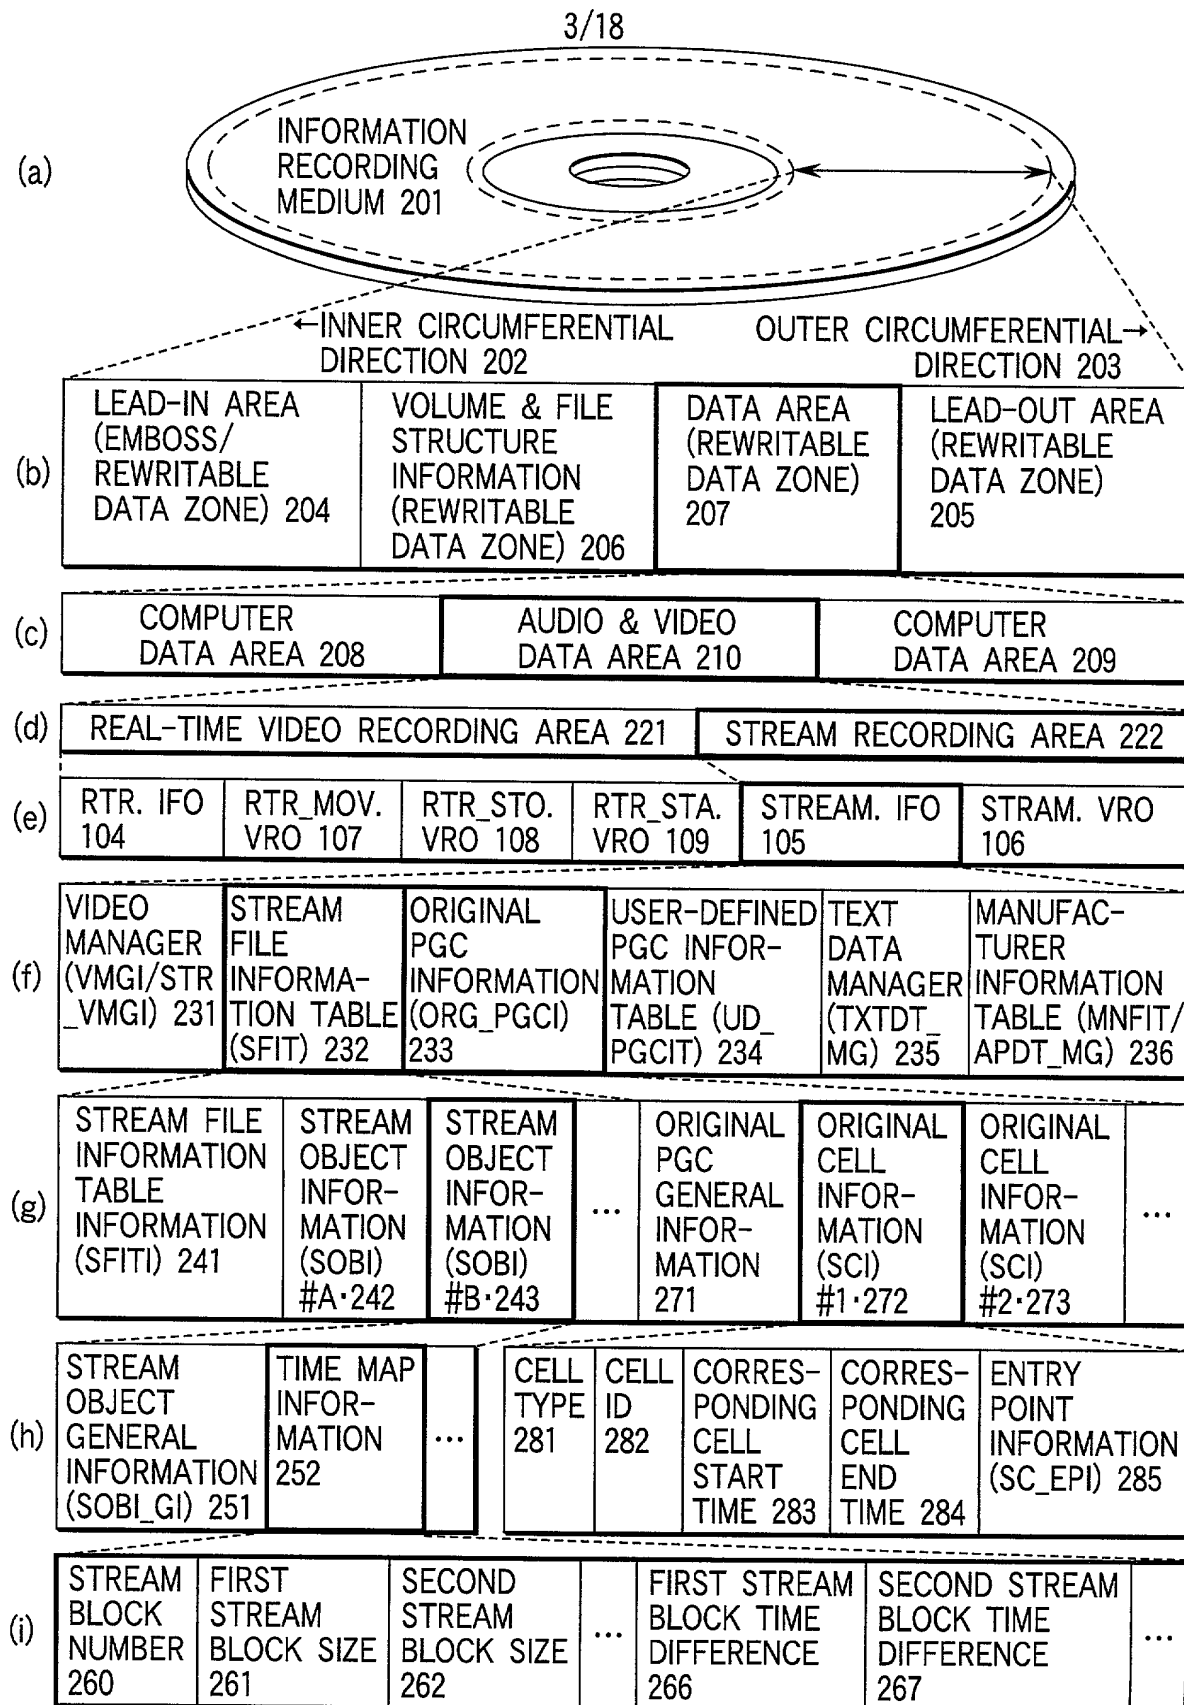


FIG. 3

4/18

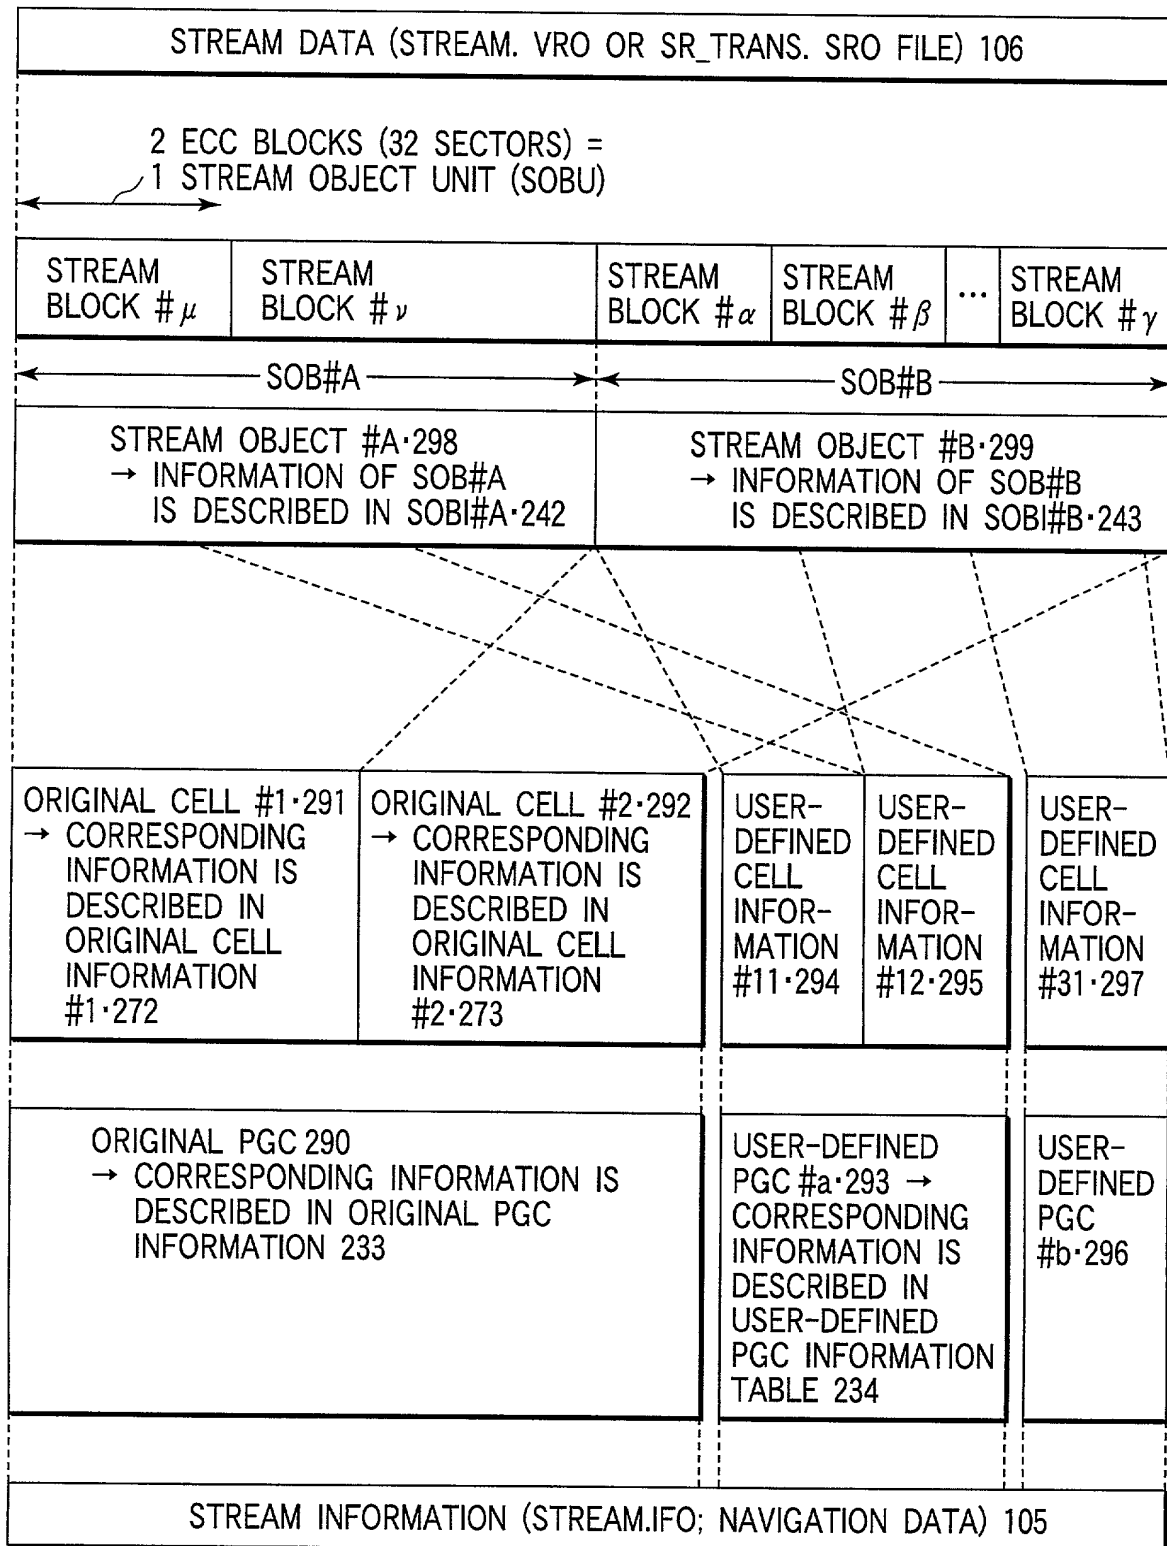


FIG. 4

5/18

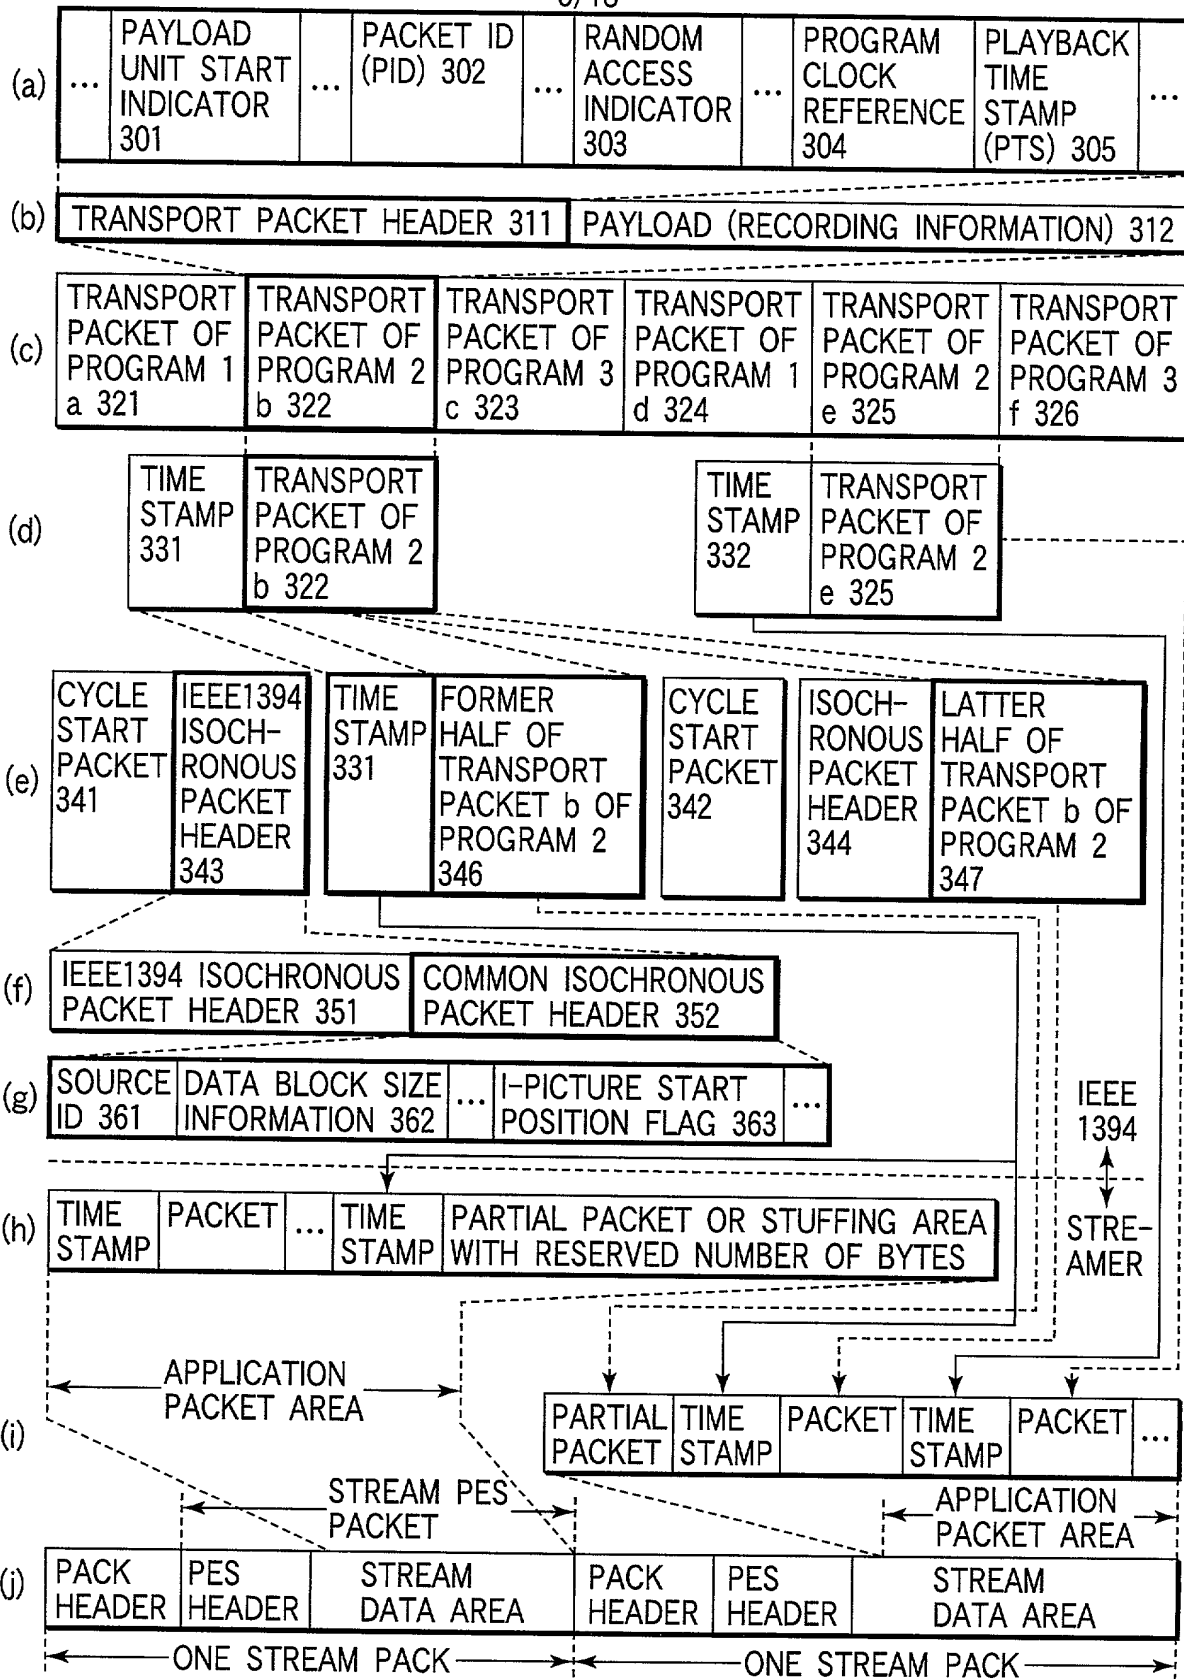


FIG. 5

6/18

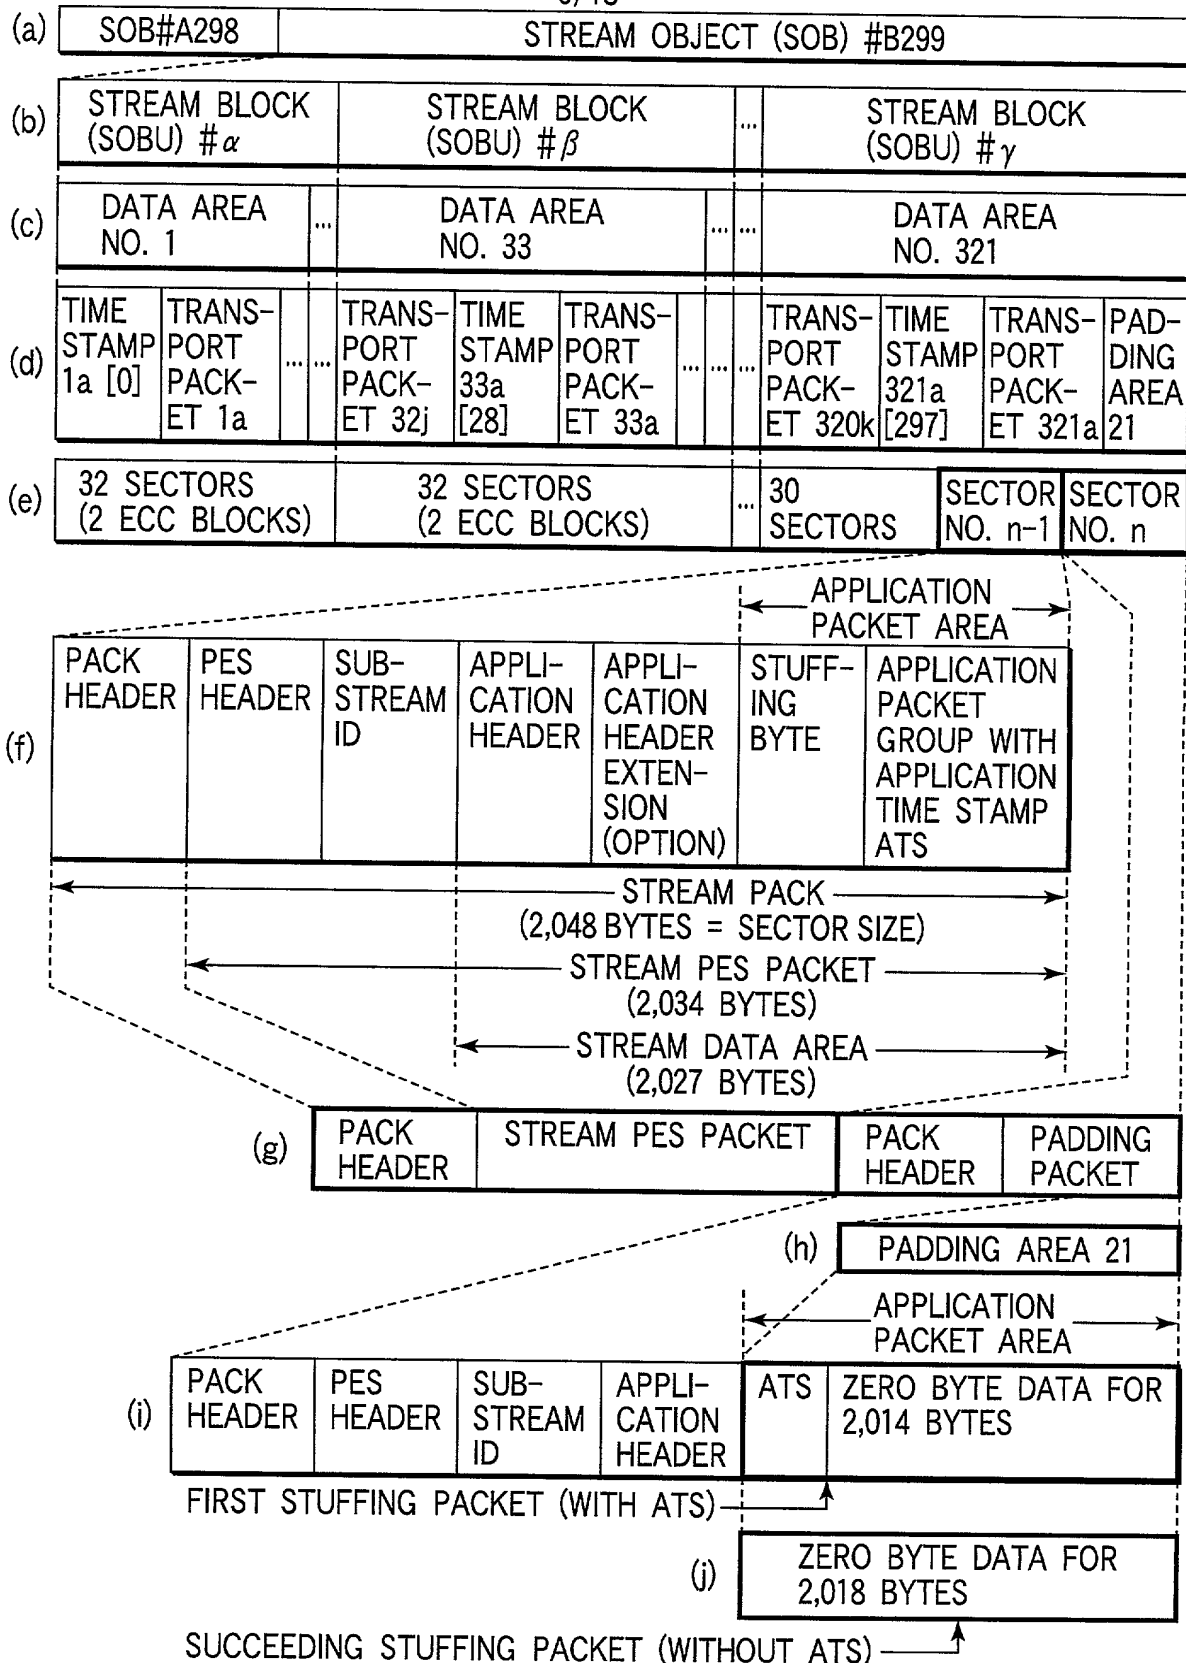


FIG. 6



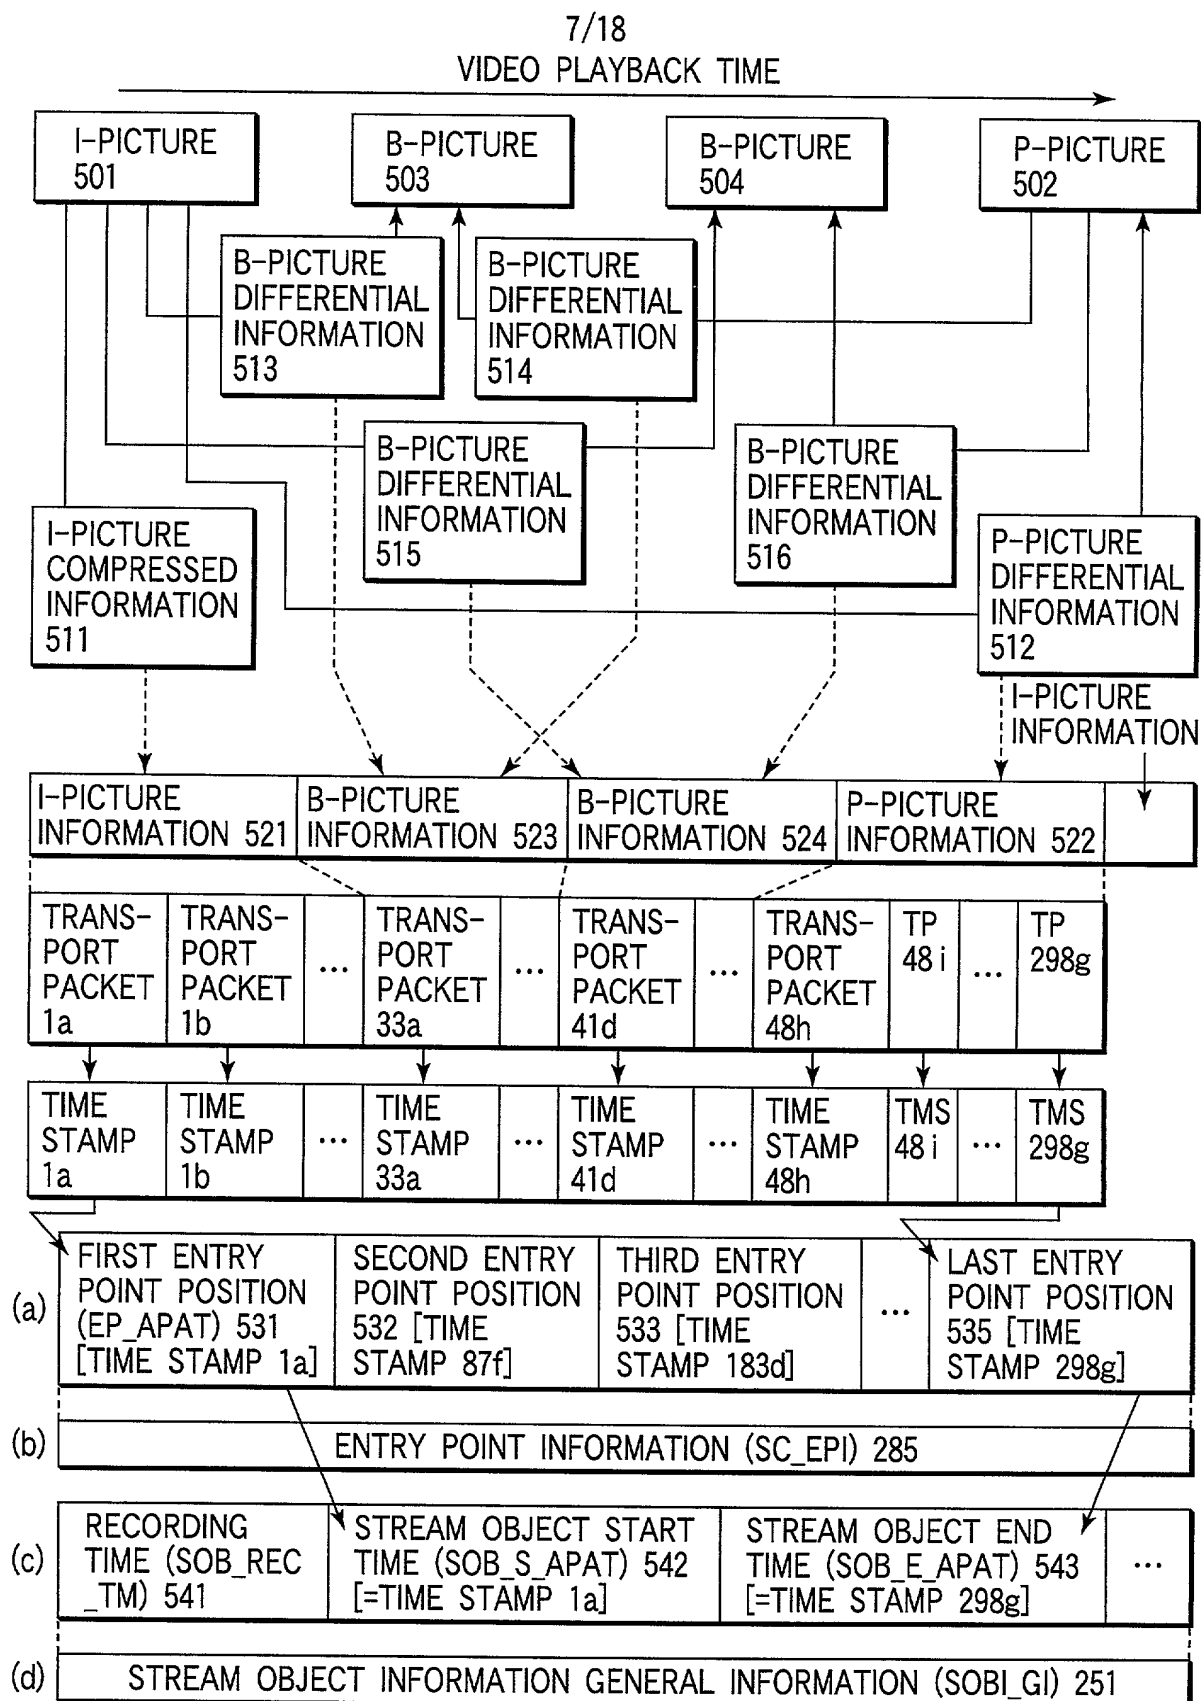


FIG. 7

8/18

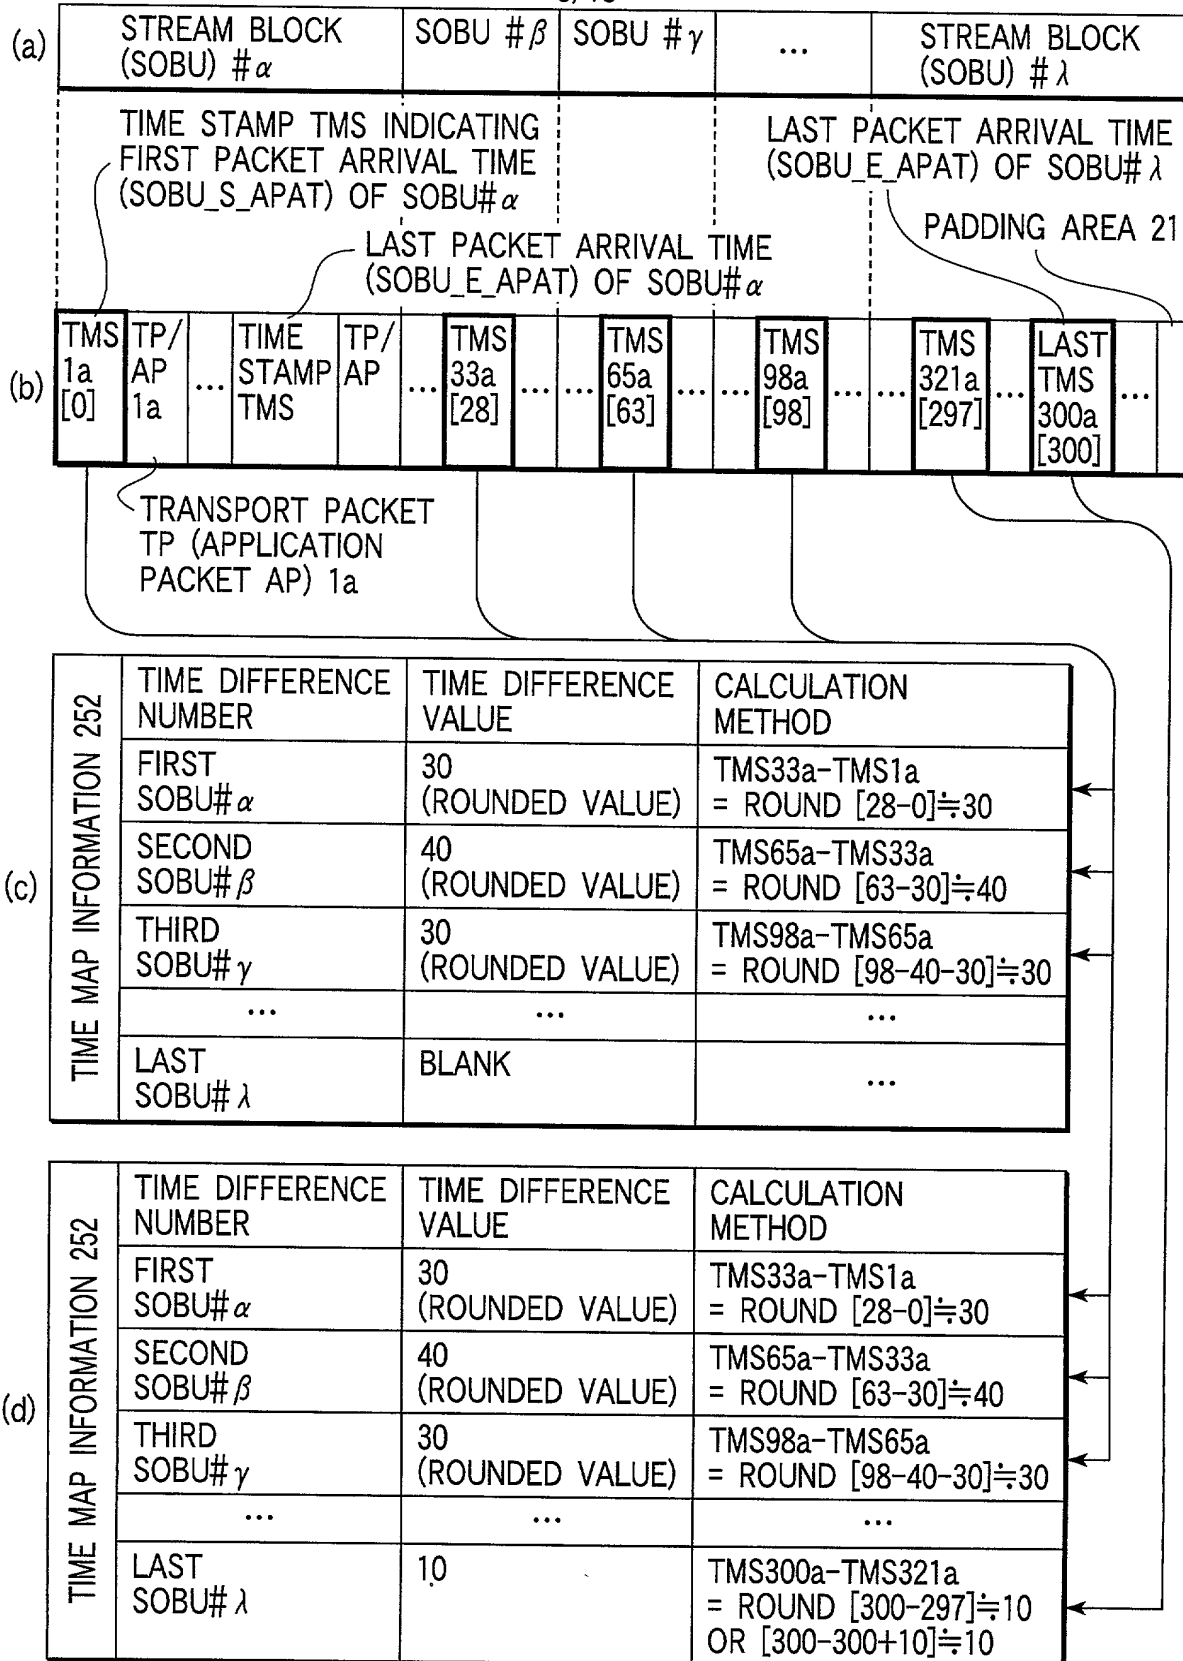


FIG. 8

9/18

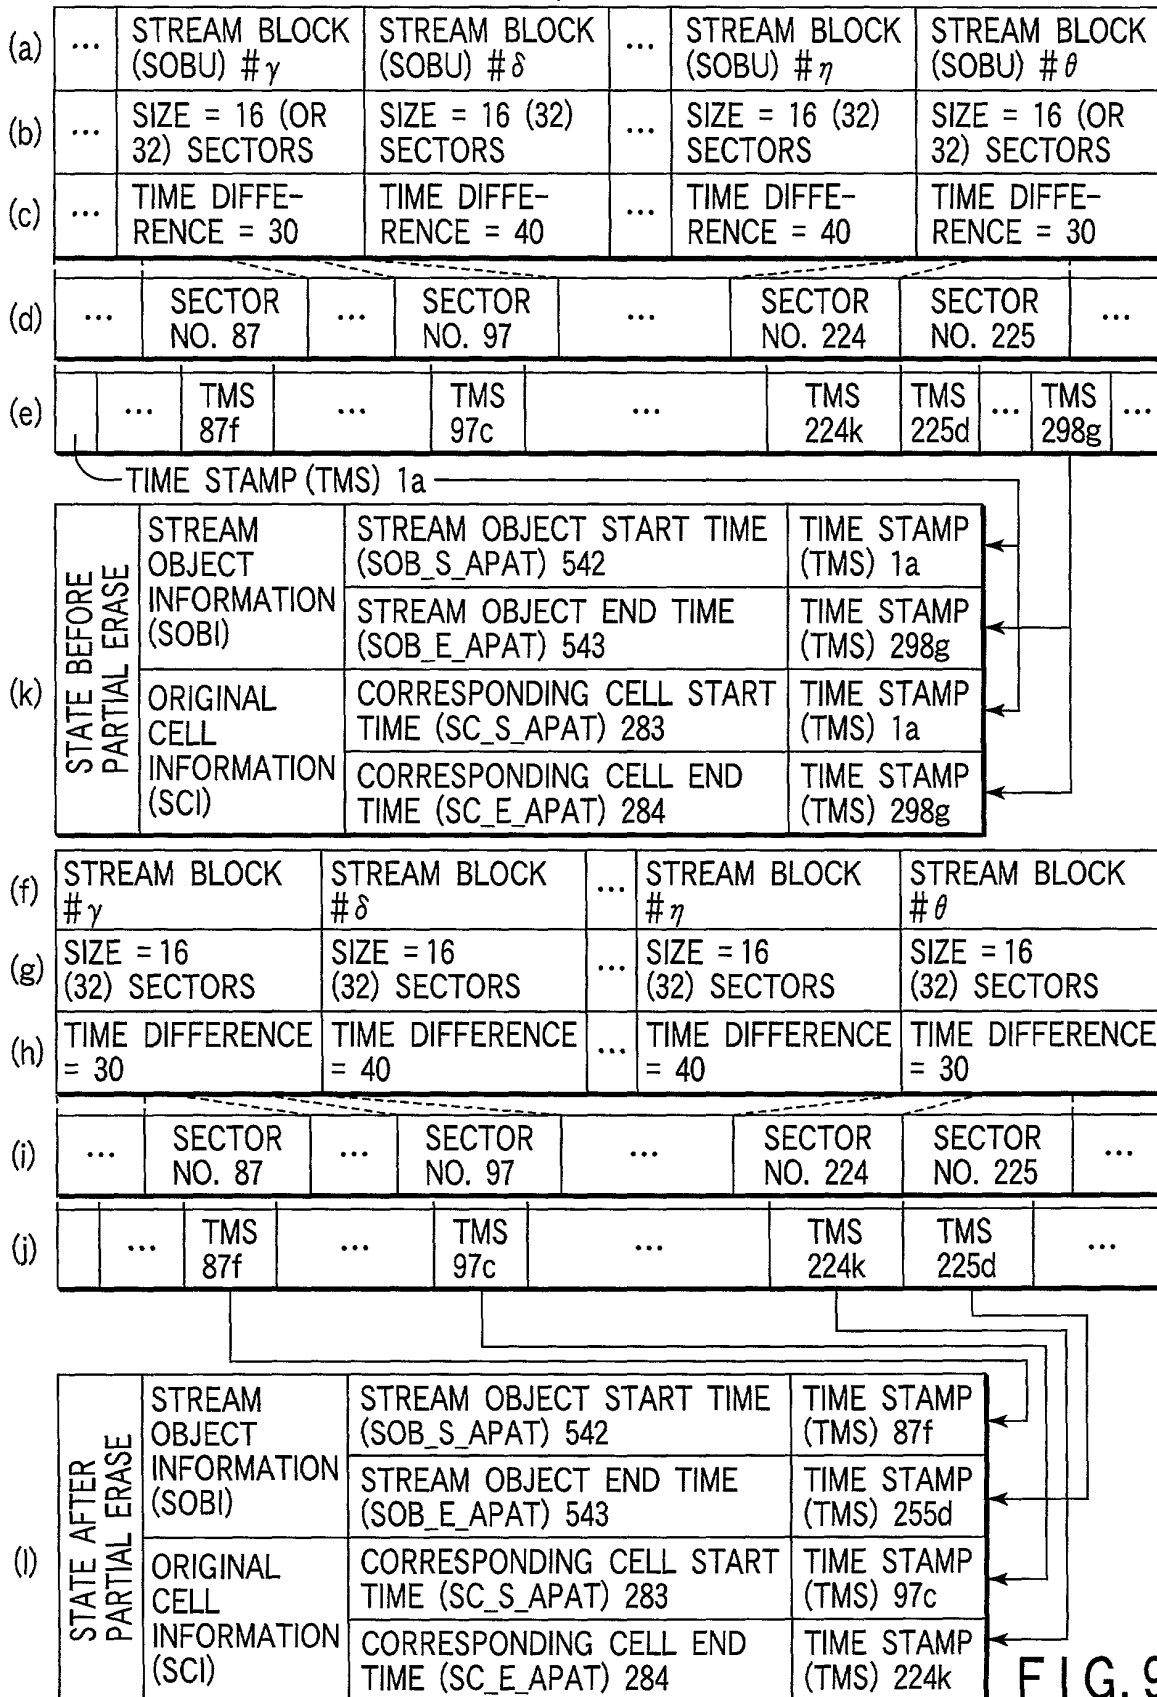


FIG. 9

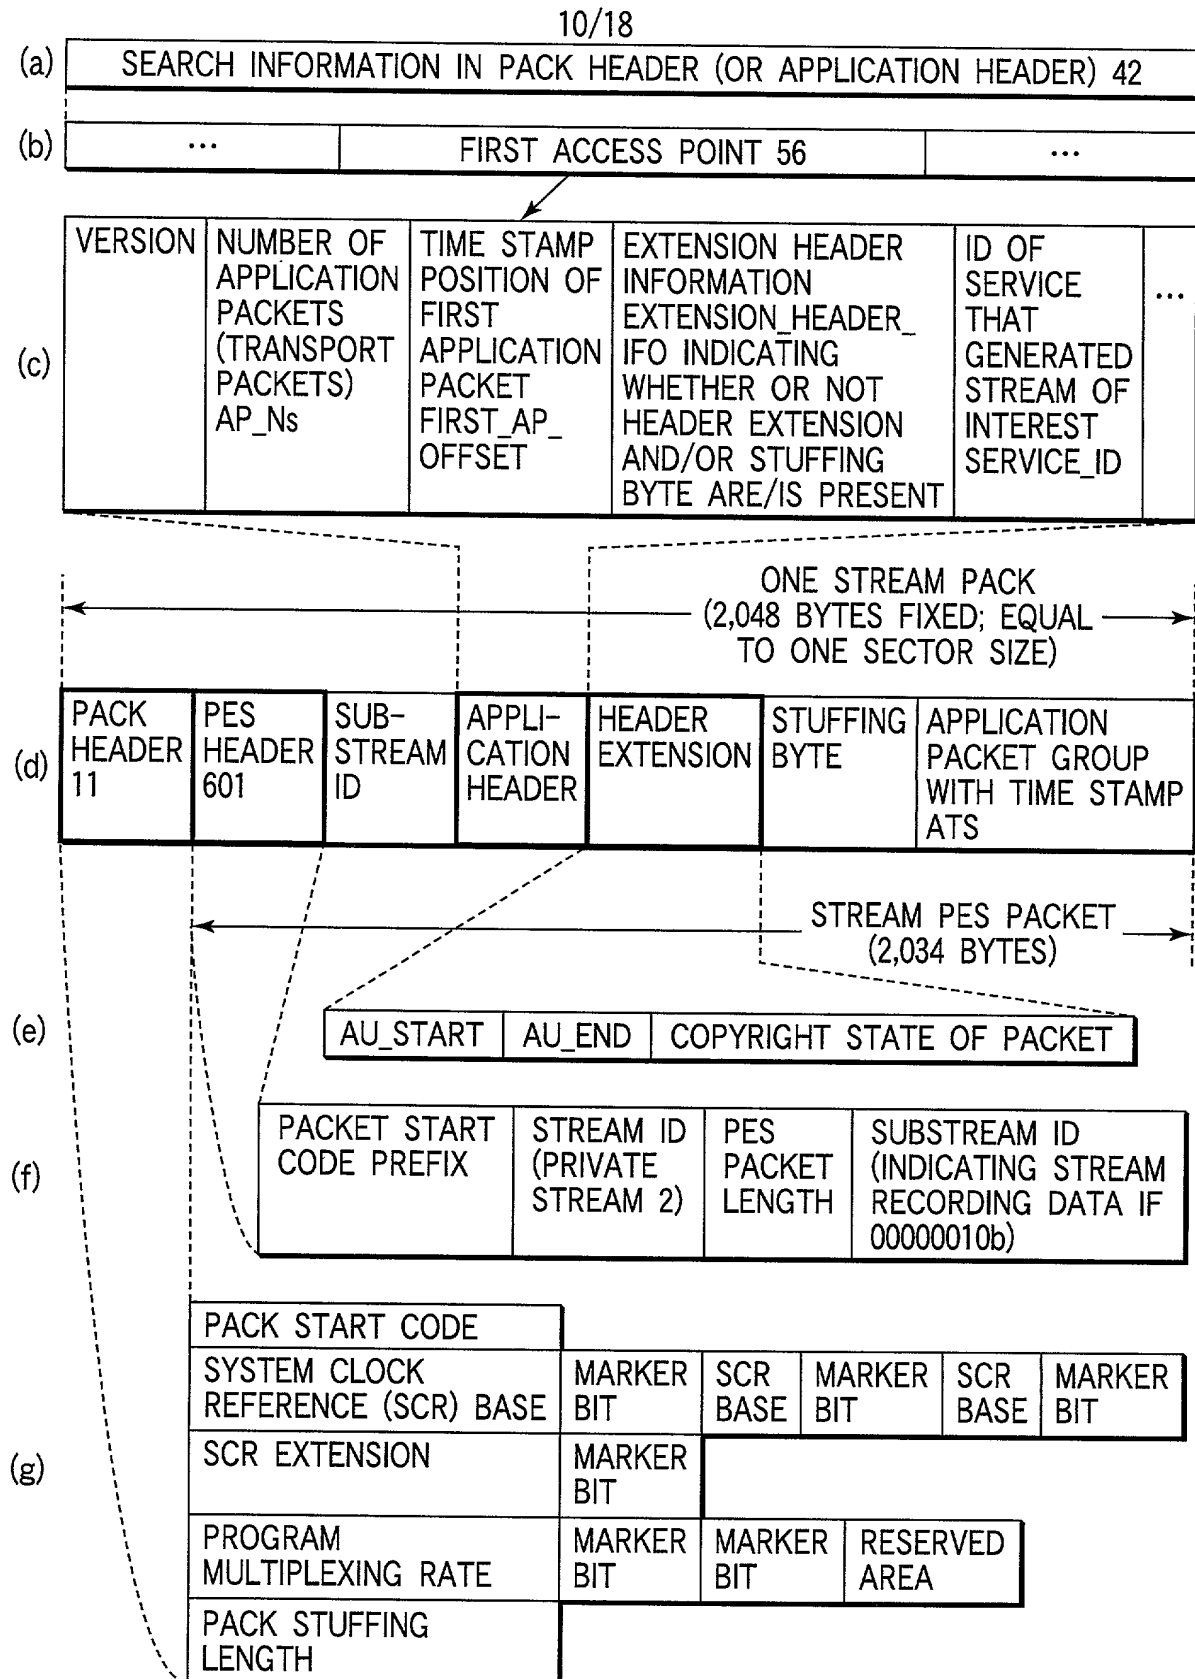


FIG. 10

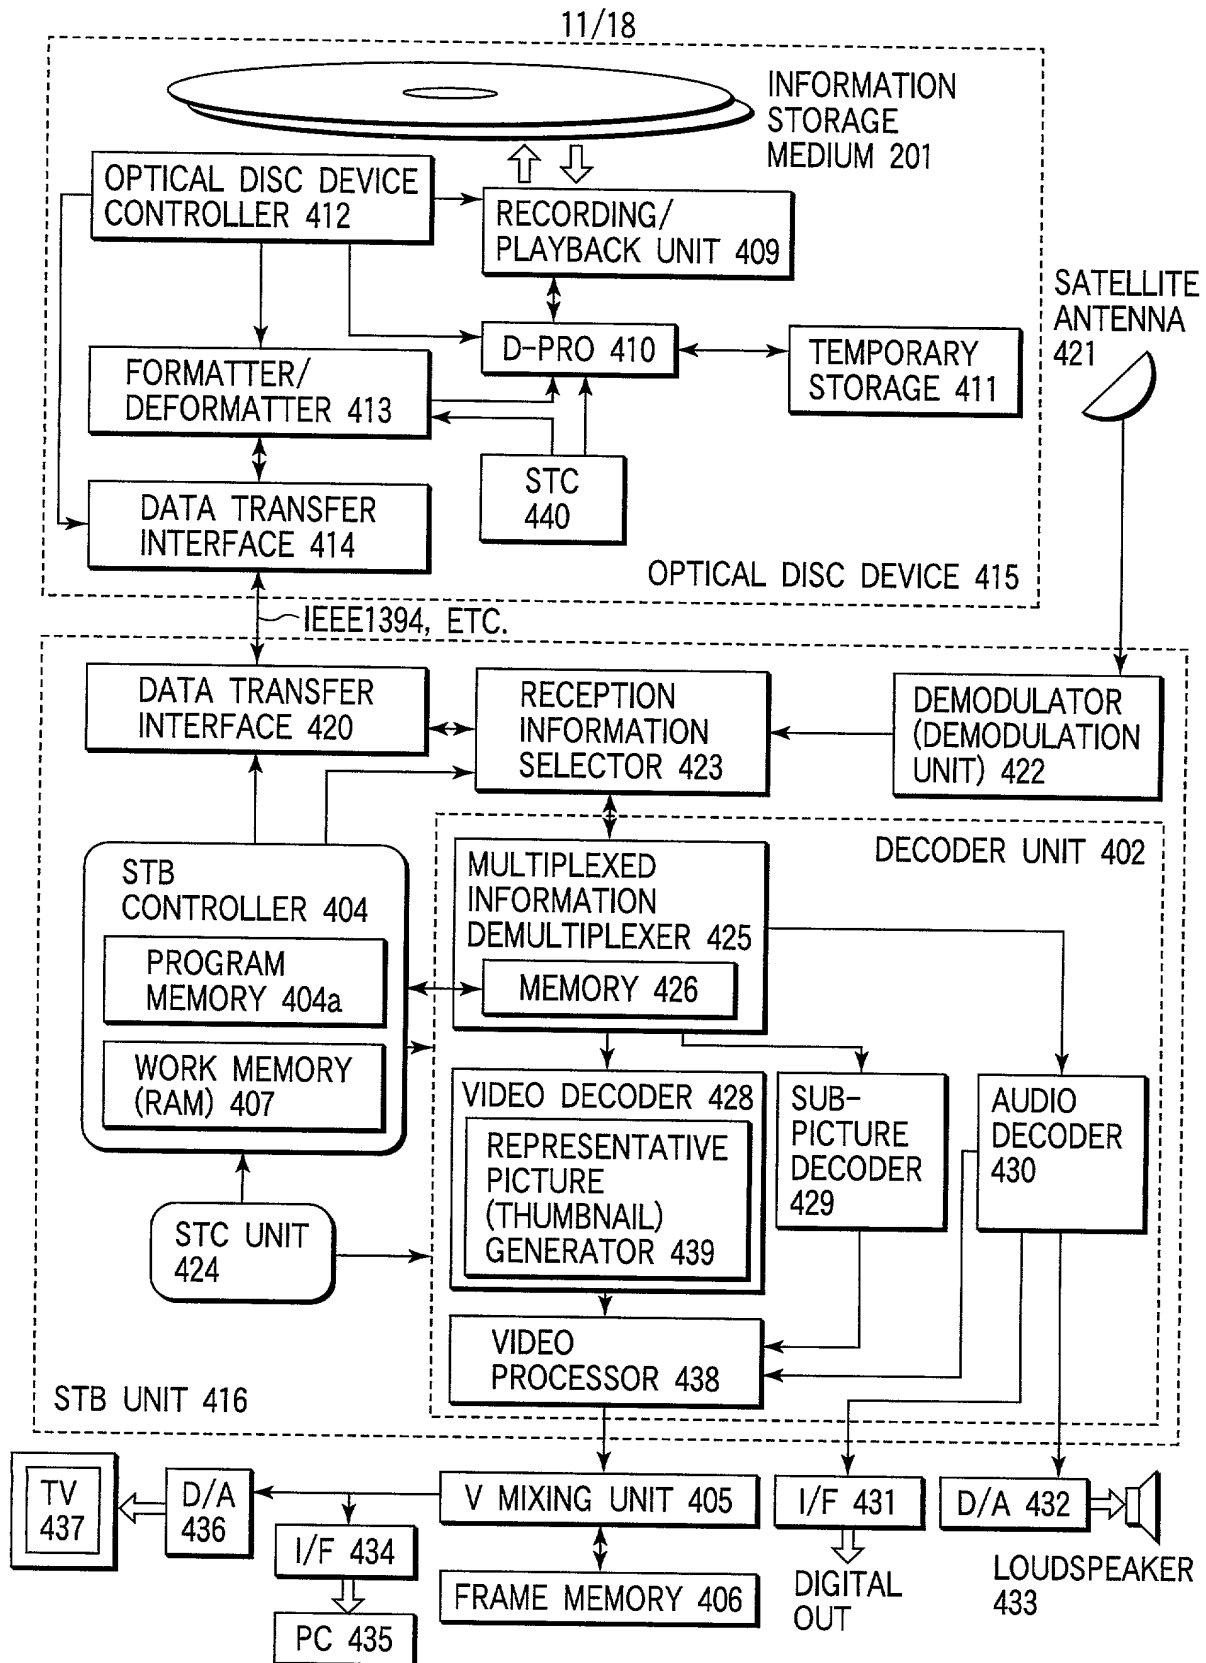


FIG. 11

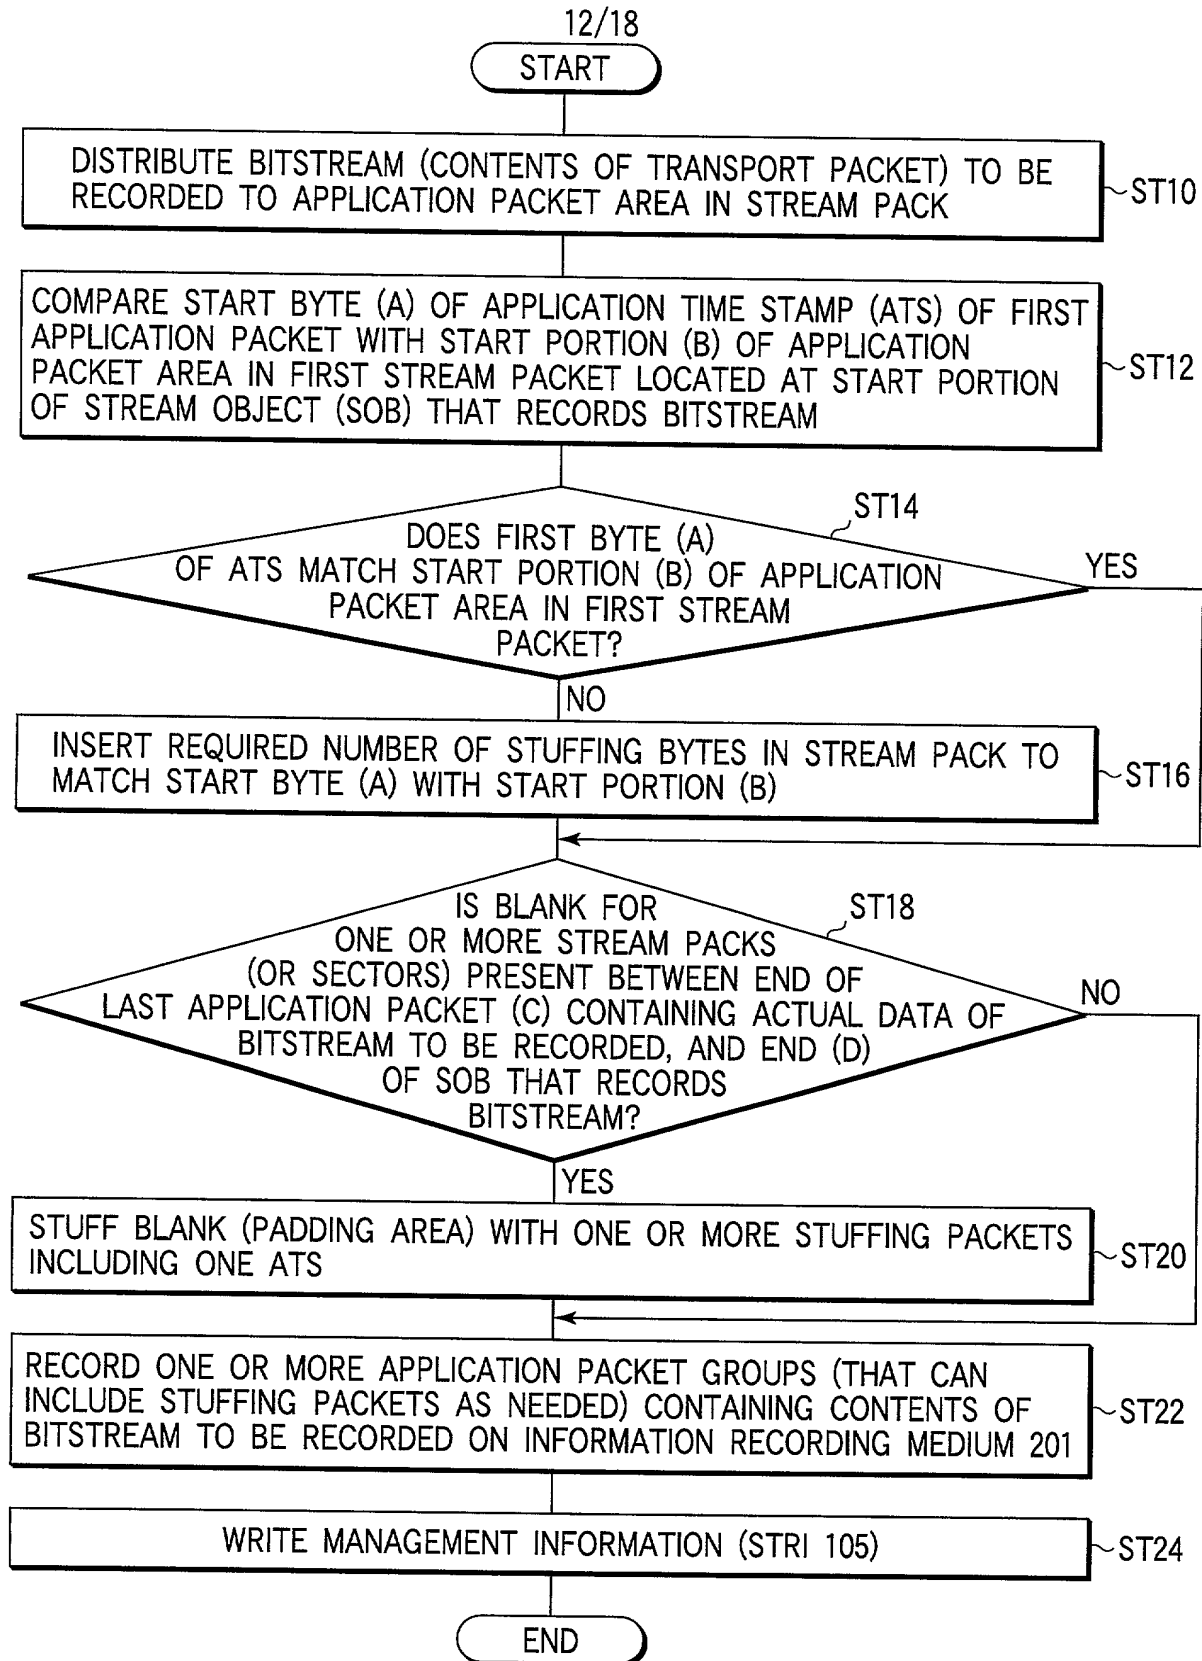


FIG. 12

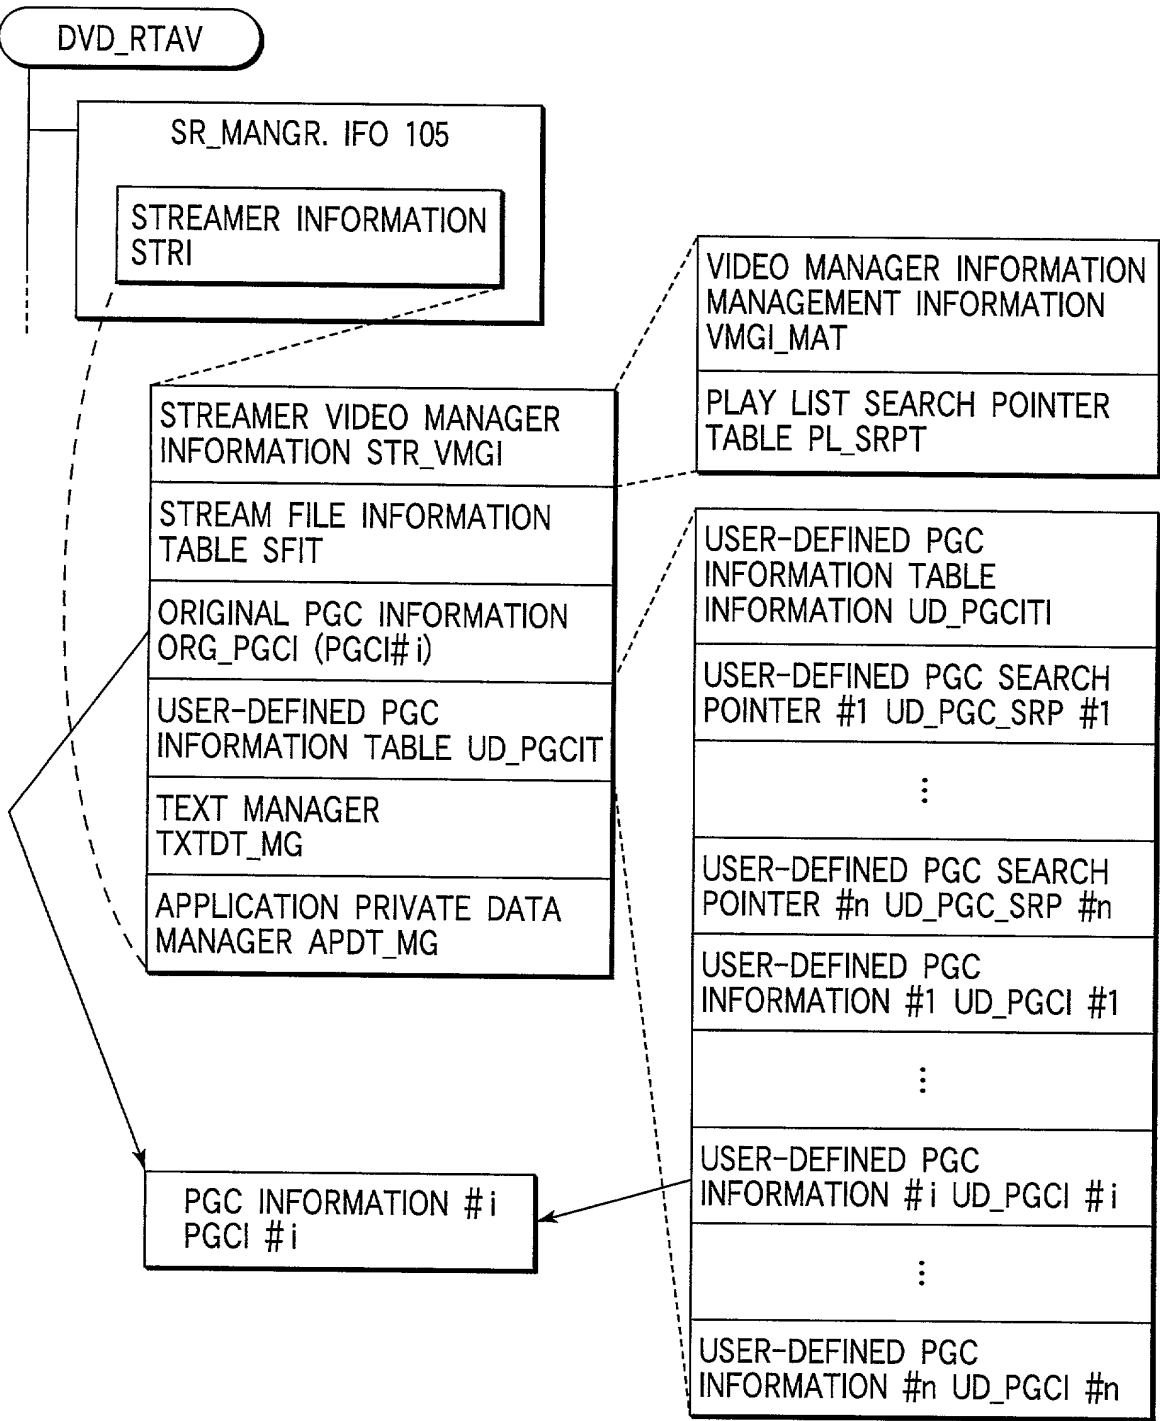


FIG. 13

14/18

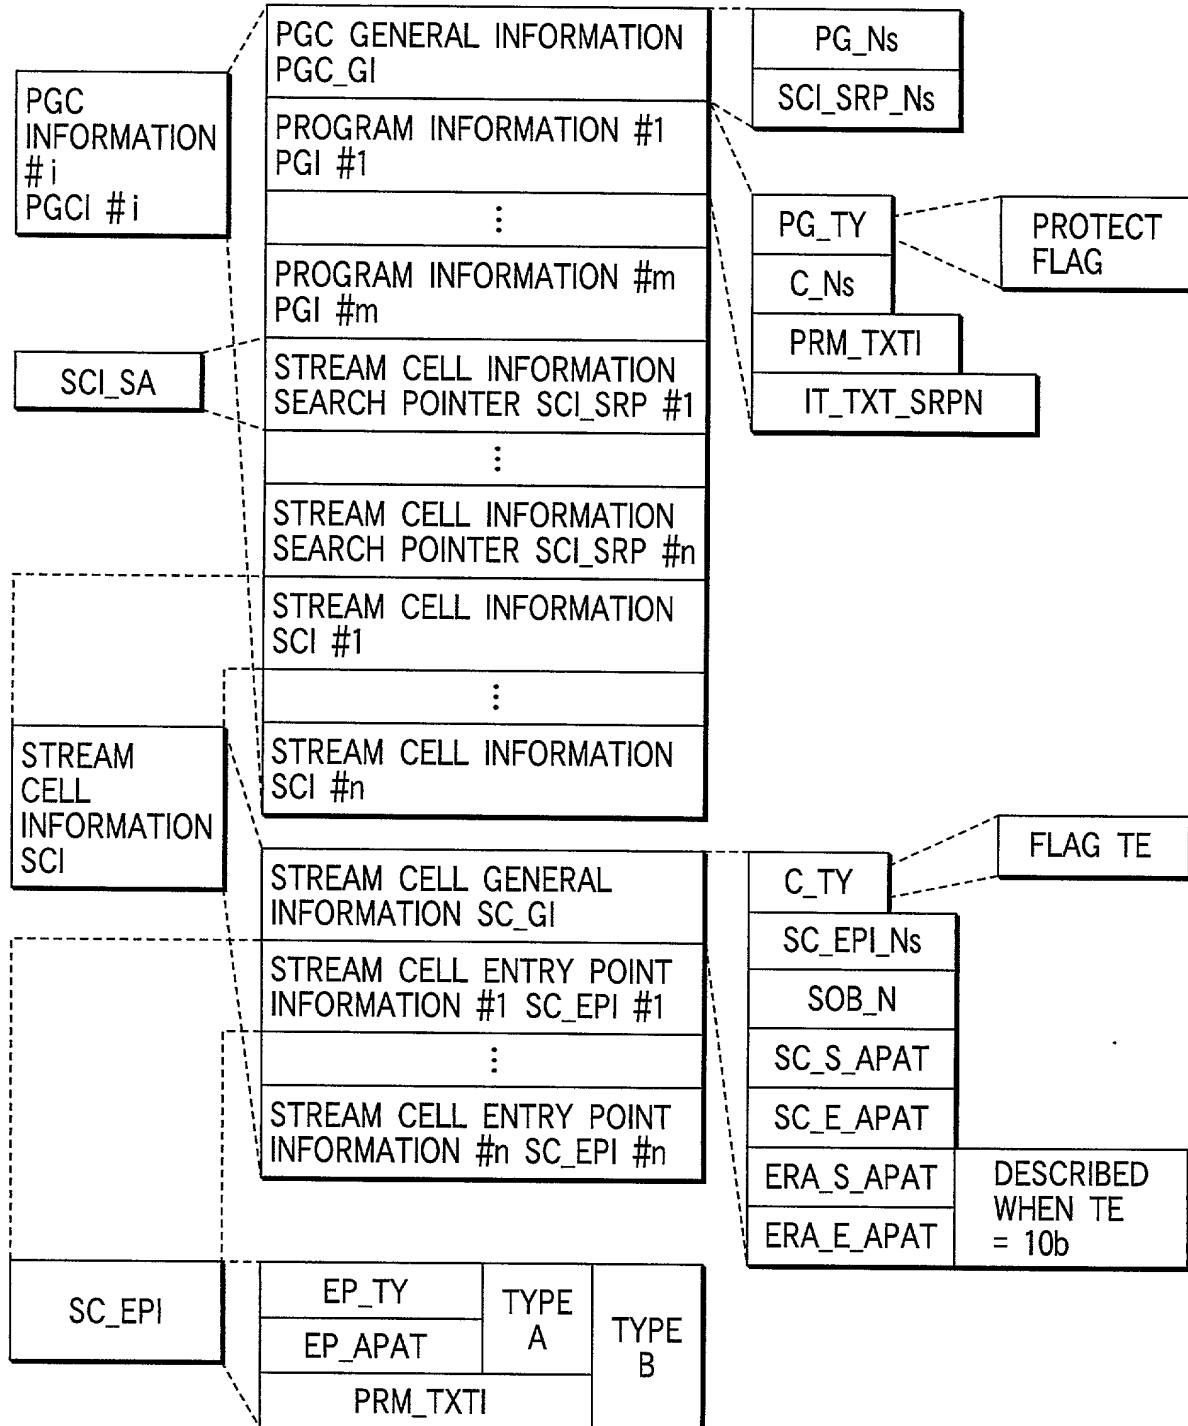


FIG. 14



15/18

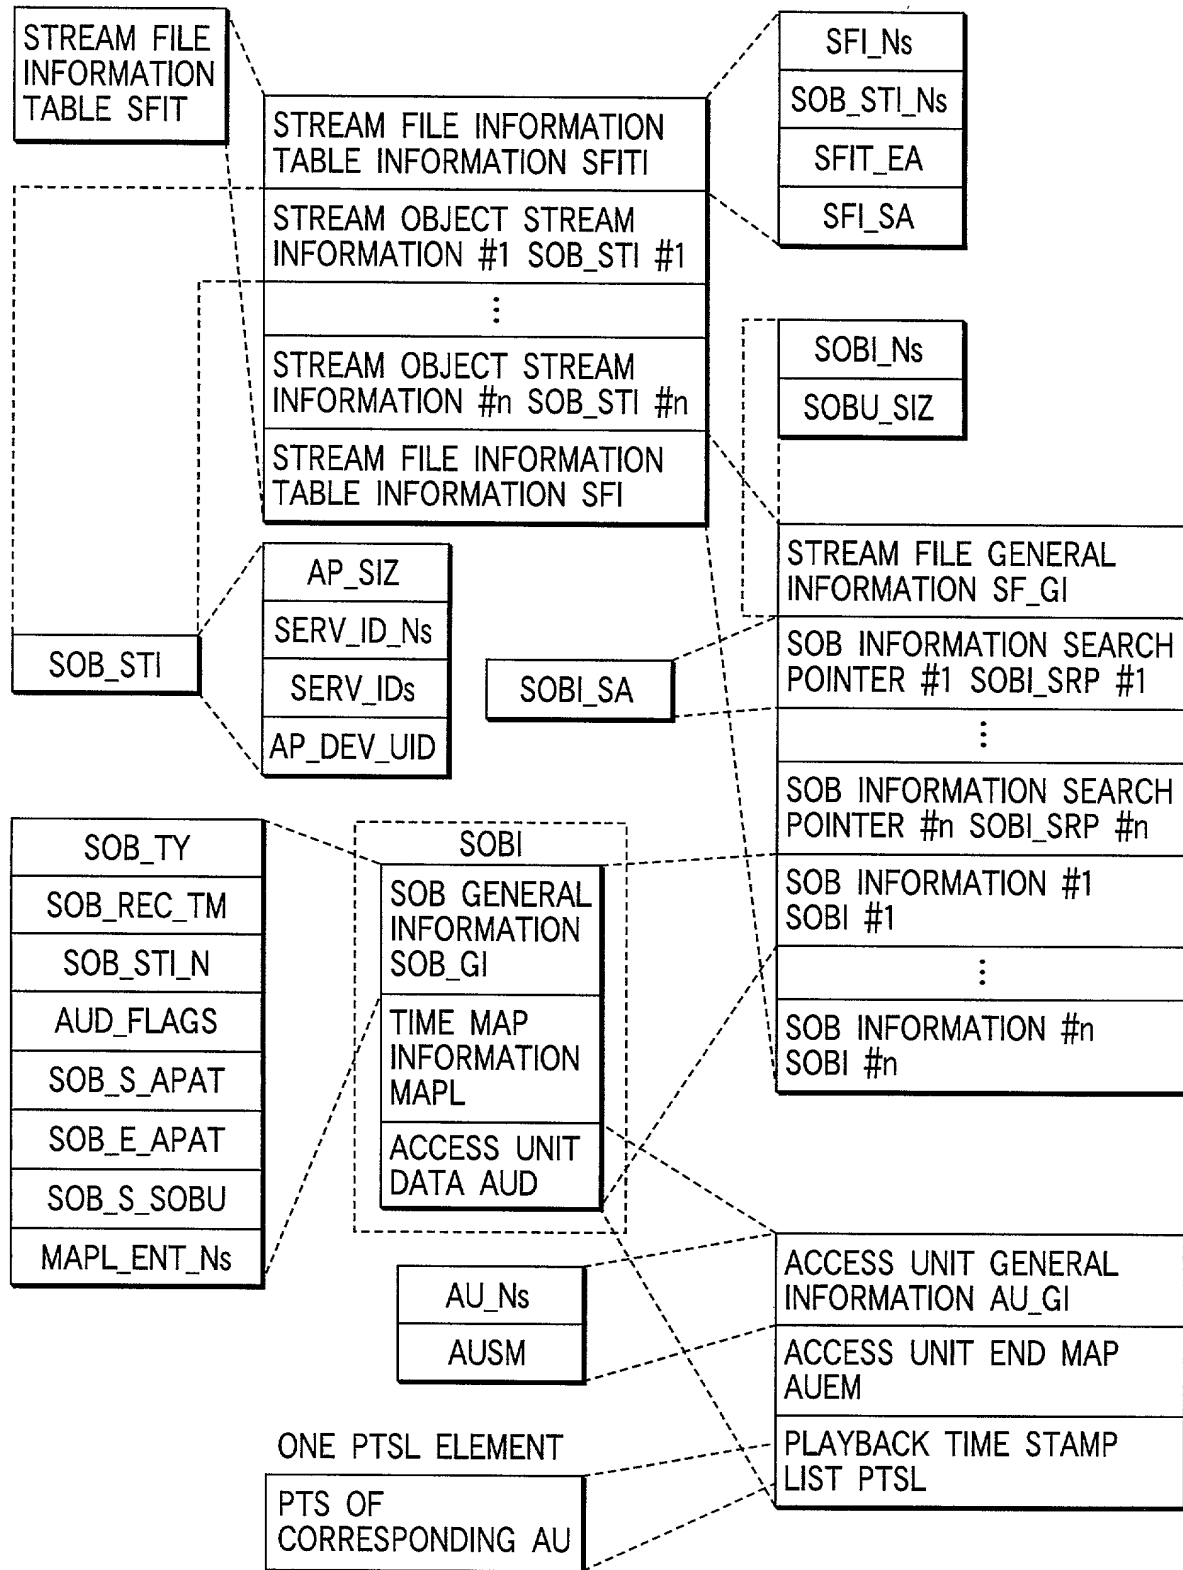


FIG. 15

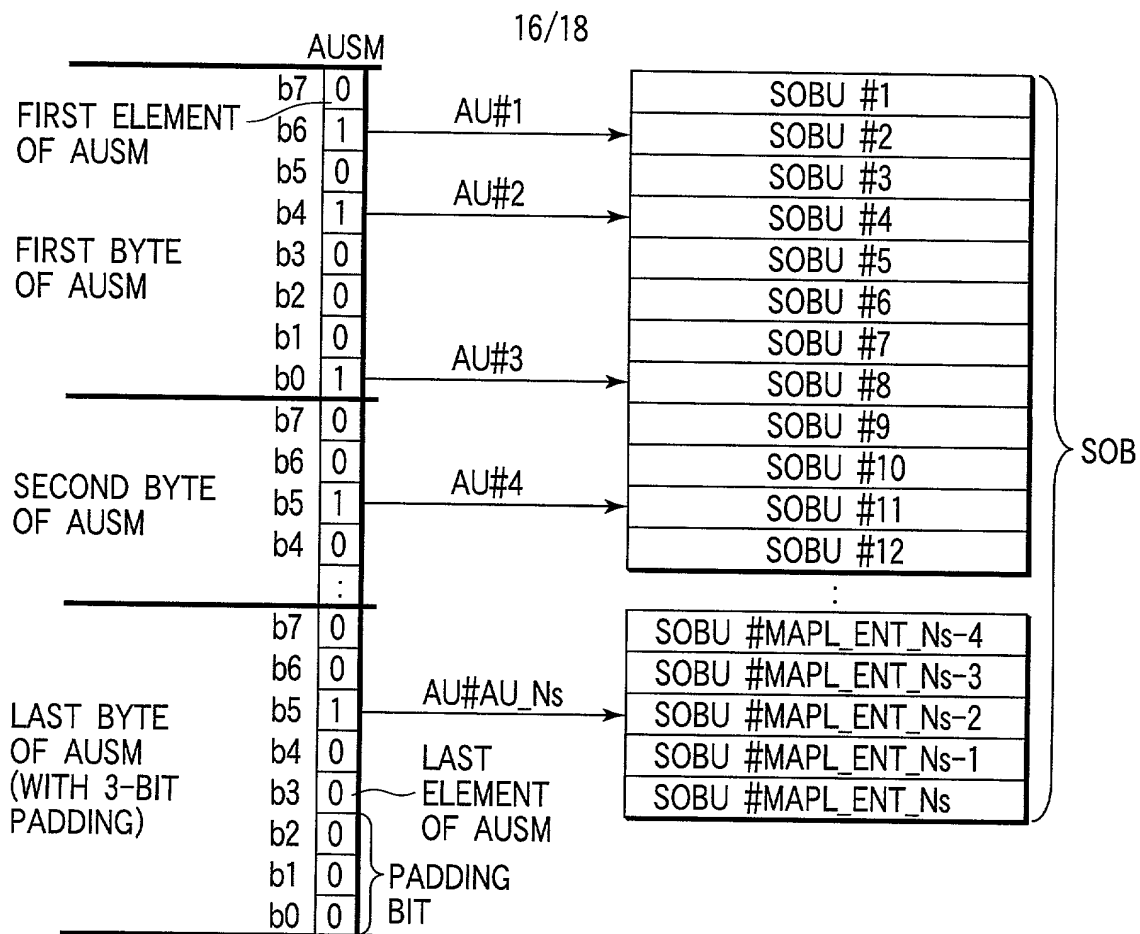


FIG. 16

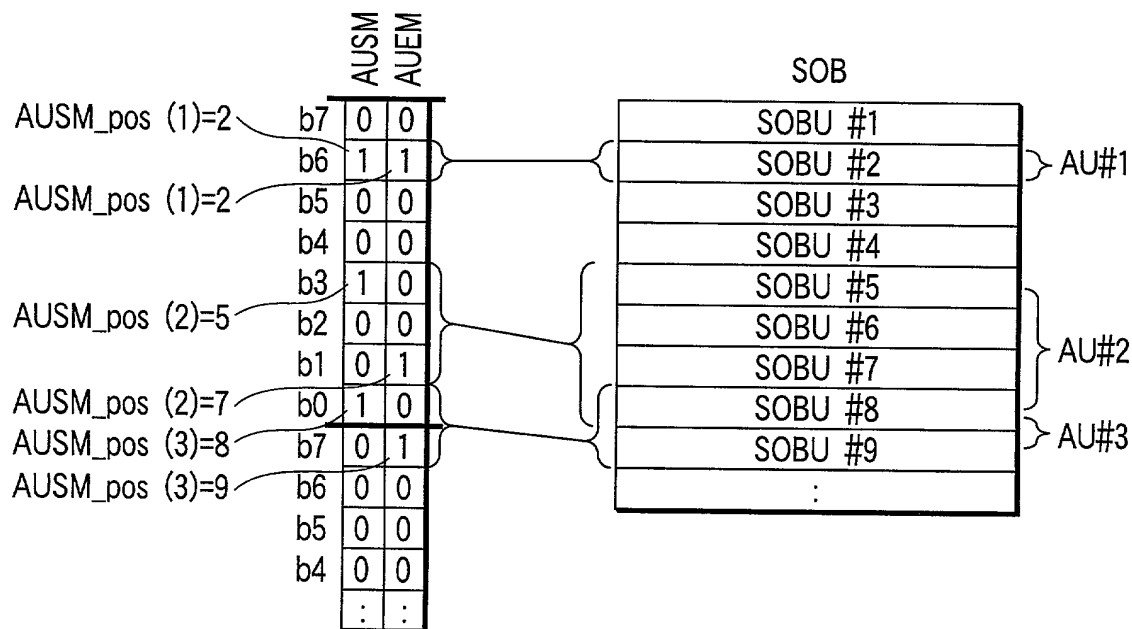


FIG. 17

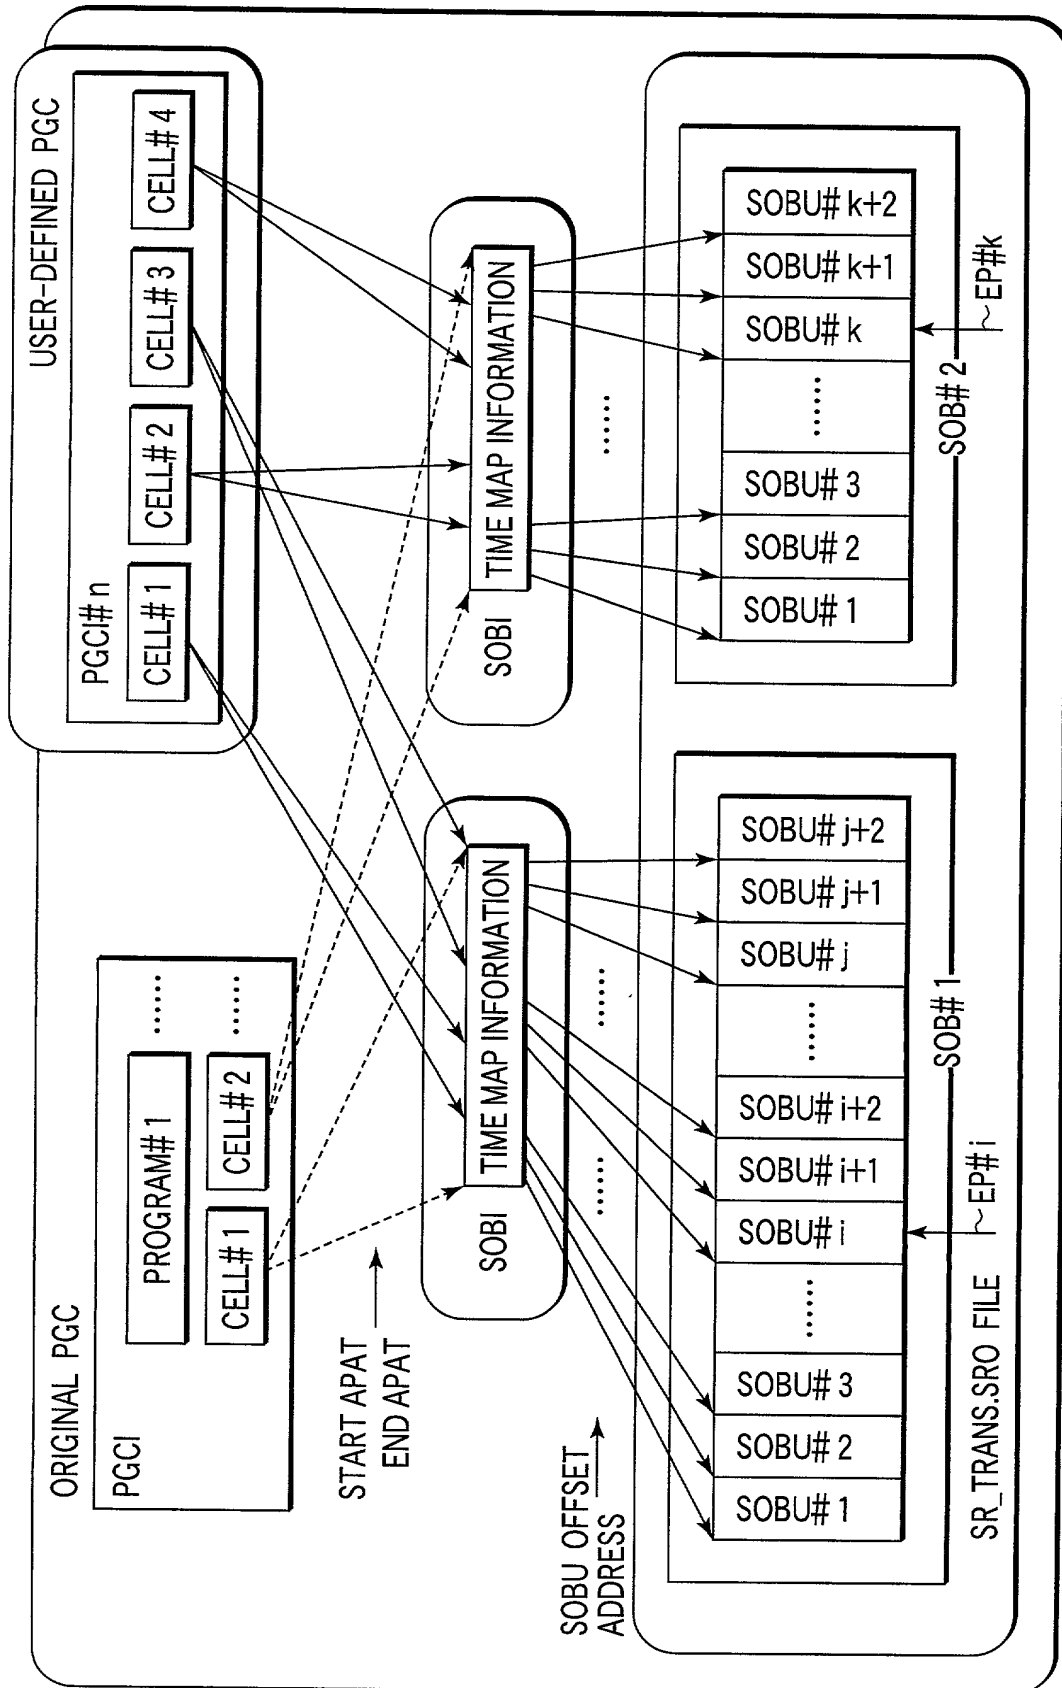


FIG. 18

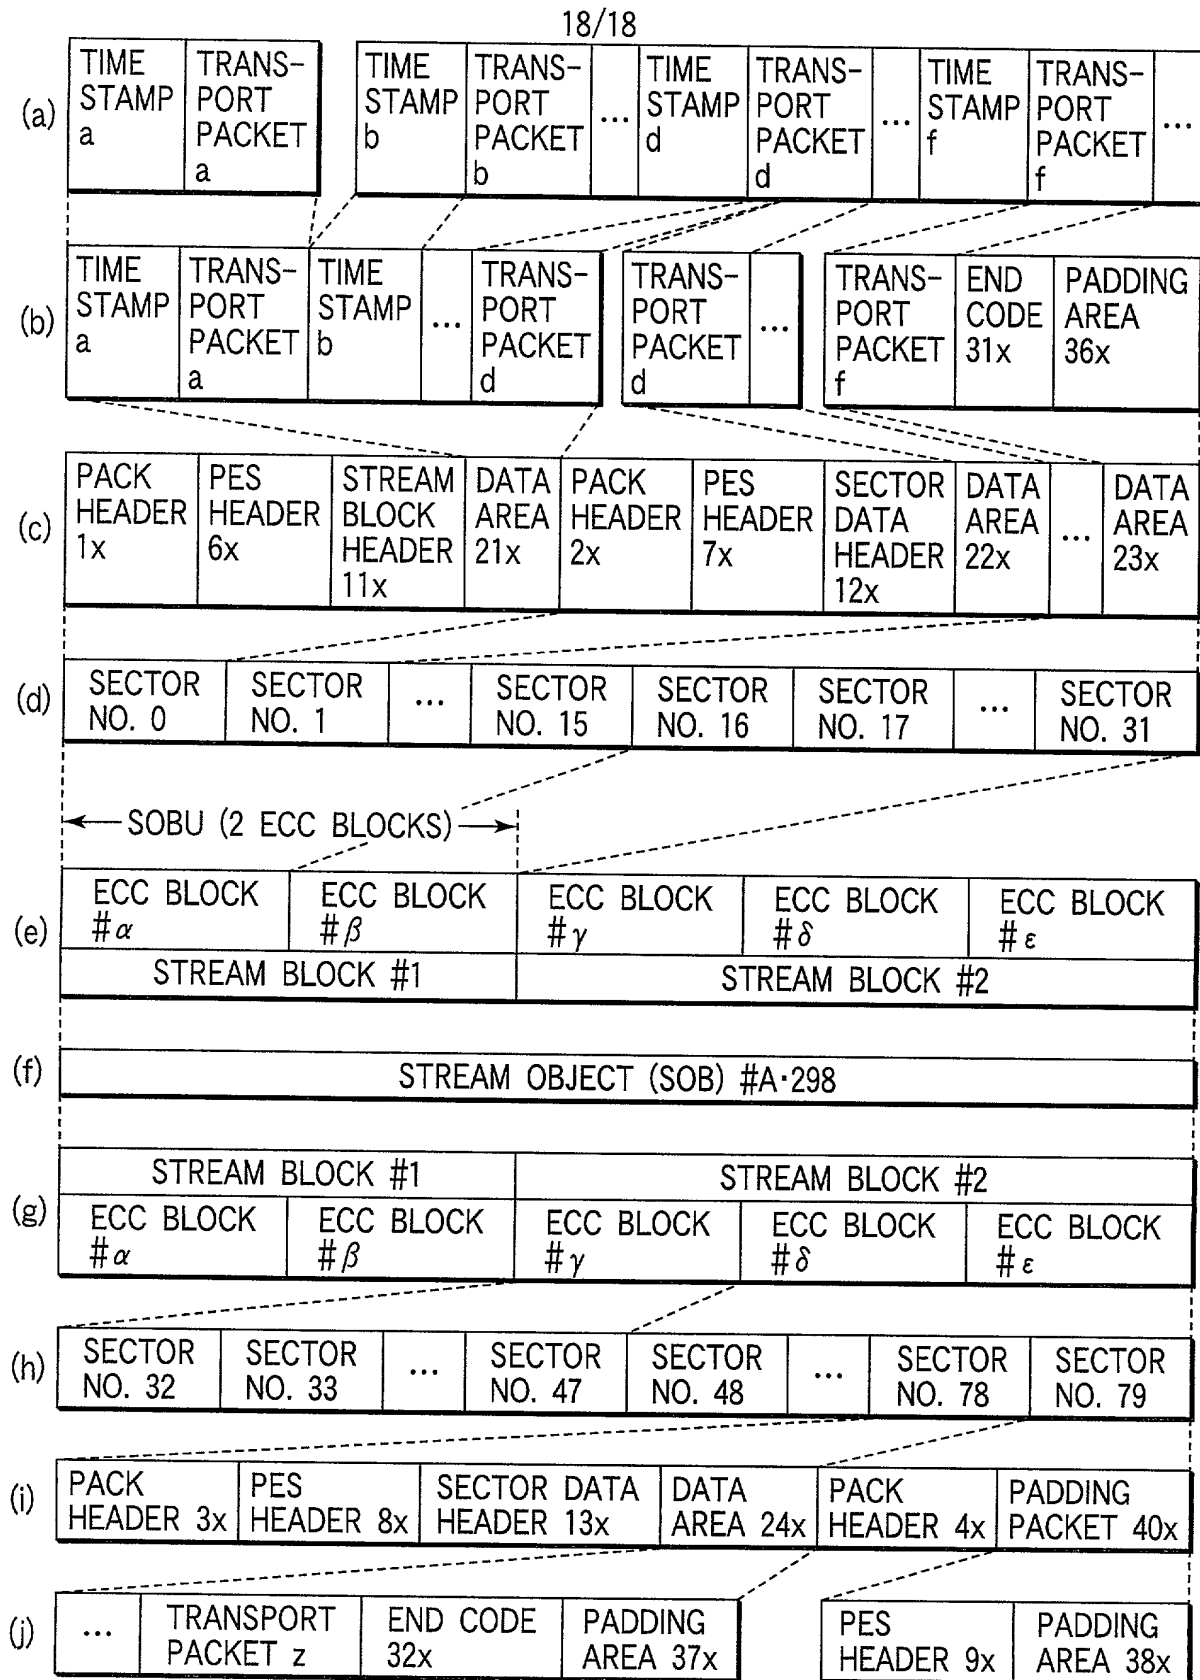


FIG. 19

## DECLARATION FOR PATENT APPLICATION

(99S1050P)

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below above my name; I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

RECORDING METHOD OF STREAM DATA AND DATA STRUCTURE  
THEREOF

the specification of which (check applicable box(es)).

[X] is attached hereto, the patent application of which was filed on March 17, 2000 as United States Application No. or PCT International Application No. PCT/JP00/01653, and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Japanese Patent Application No. 11-072077, filed March 17, 1999

Priority Claimed

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s) or 35 U.S.C. 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Norman F. Oblon (Reg. No. 24,618), Marvin J. Spivak (Reg. No. 24,913), C. Irvin McClelland (Reg. No. 21,124), Gregory J. Maier (Reg. No. 25,599), Arthur I. Neustadt (Reg. No. 24,854), Richard D. Kelly (Reg. No. 27,757), James D. Hamilton (Reg. No. 28,421), Eckhard H. Kuesters (Reg. No. 28,870), Robert T. Pous (Reg. No. 29,099), Charles L. Gholz (Reg. No. 26,395), Vincent J. Sunderdick (Reg. No. 29,004), William E. Beaumont (Reg. No. 30,996), Robert F. Gnuse (Reg. No. 27,295), Jean-Paul Lavalleye (Reg. No. 31,451), Stephen G. Baxter (Reg. No. 32,884), Robert W. Hahl (Reg. No. 33,893), Richard L. Treanor (Reg. No. 36,379), Steven P. Weihrouch (Reg. No. 32,829), John T. Goolkasian (Reg. No. 26,142), Richard L. Chinn (Reg. No. 34,305), Steven E. Lipman (Reg. No. 30,011), Carl E. Schlier (Reg. No. 34,426), James J. Kulbaski (Reg. No. 34,648), Richard A. Neifeld (Reg. No. 35,299), J. Derek Mason (Reg. No. 35,270), Surinder Sachar (Reg. No. 34,423), Christina M. Gadiano (Reg. No. 37,628), Jeffrey B. McIntyre (Reg. No. 36,867), Paul E. Rauch (Reg. No. 38,591), William T. Enos (Reg. No. 33,128) and Michael E. McCabe, Jr., (Reg. No. 37,182), each of whose address is Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202, or any one of them, and request that correspondence be directed to Oblon, Spivak, McClelland, Maier & Neustadt, P.C., Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

[1st Inventor]

Residence Address: 205, High-Home-Takahatafudo, 890-1, Arai, Hino-shi, Tokyo 191-0022, Japan

Post Office Address: 205, High-Home-Takahatafudo, 890-1, Arai, Hino-shi, Tokyo 191-0022, Japan

Country of Citizenship: Japan

Date: September 5, 2000

Hideo Ando

Hideo Ando

[2nd Inventor]

Residence Address: LM301, 199, Midoricho 2-chome, Kumagaya-shi, Saitama 360-0845, Japan

Post Office Address: LM301, 199, Midoricho 2-chome, Kumagaya-shi, Saitama 360-0845, Japan

Country of Citizenship: Japan

Date: Sep. 5, 2000

Kazuyuki Uyama

Kazuyuki Uyama

[3rd Inventor]

Residence Address: 302, 5-22-1, Chuo, Ota-ku, Tokyo 143-0024, Japan

Post Office Address: 302, 5-22-1, Chuo, Ota-ku, Tokyo 143-0024, Japan

Country of Citizenship: Japan

Y.I. Sep 5, 2000

Date: Sep. 5, 2000

Yuuji Ito

Yuuji Ito

Yuuji Ito

[4th Inventor]

Residence Address: V-202, Shokkubirayoko, 4-23-1, Yokodai, Isogo-ku, Yokohama-shi, Kanagawa 235-0045, Japan

Post Office Address: V-202, Shokkubirayoko, 4-23-1, Yokodai, Isogo-ku, Yokohama-shi, Kanagawa 235-0045, Japan

Country of Citizenship: Japan

Date: Sep. 5, 2000

Shinichi Kikuchi

Shinichi Kikuchi